



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

## Energy Star Test Report

For

### L-TECH CORPORATION

(Brand Name:N/A)

Shaogangtou District, Qiaotou Town, Dongguan City

### Model name(s): ULD6-5CT

**Report Type:**

Testing and Report According to ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

**Type of  
Luminaire:**

Inseparable Other SSL Luminaire

**Report Date:**

2021-04-20

Test & Report By:

*Garman Mo*

Engineer: Garman Mo

Review By:

*Johnson Sun*

Manager: Johnson Sun

Note: 1.The results contained in this report pertain only to the tested samples.

2.This report does not imply product certification, approval, or endorsement by A2LA or any agency of the Federal Government.

3.This report contains data that are not covered by the A2LA accreditation.

Project No.:JCE210313 Report No.:JCE210313-B


Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>

1.1 Product Information:		
Model Number	ULD6-5CT	
Remark	According to the test data, 2700K is the most consumptive mode.	
Representative (Tested) Model	ULD6-5CT(Mode:2700K) ULD6-5CT(Mode:3000K) ULD6-5CT(Mode:3500K) ULD6-5CT(Mode:4000K) ULD6-5CT(Mode:5000K)	
Model Difference	N/A	
SKU (if available)	N/A	
Type of Luminaire (for integral lamps, list base type and lamp type)	Inseparable Other SSL Luminaire	
LED Manufacturer	EVERLIGHT ELECTRONICS CO., LTD	
LED Model	67-21S Series	
Dimming	10%-100%	
Sample Number	JCE210313-B1	
Date of Receipt	2021-04-05	
Luminaire Aperture (for Downlight retrofits)	--	in.
Luminaire Length	--	mm
Luminaires Width	--	mm
Number of Units (modular products)	N/A	s

1.2 Rated Values:	
Rated Voltage / Frequency	120V,50/60Hz
Nominal Power	9W
Rated Initial Lamp Lumen	--
Declared CCT	2700K,3000K,3500K,4000K,5000K

### 1.3 Product Photos

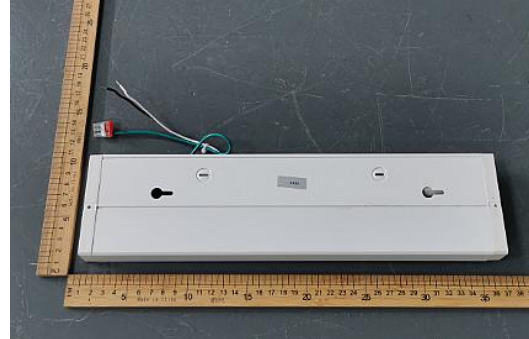

#### 1.4 Test Specifications:

Test item	<ol style="list-style-type: none"> <li>1. Total Luminous Flux</li> <li>2. Luminous Distribution Intensity</li> <li>3. Luminous Efficacy</li> <li>4. Correlated Color Temperature</li> <li>5. Color Rendering Index</li> <li>6. Chromaticity Coordinate</li> <li>7. Electrical Parameters</li> <li>8. Color Angular Uniformity</li> <li>9. Dimming</li> <li>10. Flicker</li> <li>11. Operating Frequency</li> <li>12. Starting Time</li> <li>13. Transient Protection Test</li> <li>14. In-Situ Temperature Measurement Test</li> <li>15. Standby Power Consumption</li> </ol>
Reference Standard	<ol style="list-style-type: none"> <li>1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products</li> <li>2. ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products</li> <li>3. C82.77-10:2014 American National Standard for Lighting Equipment-Harmonic Emission Limits-Related Power Quality Requirements</li> <li>4. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources</li> <li>5. CIE 15-2004 Technical Report Colorimetry</li> <li>6. UL1993 4<sup>th</sup> Edition, Self-Ballasted Lamps and Lamp Adapters</li> <li>7. ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) – Version 2.2</li> <li>8. ANSI/IEEE C62.41.2:2002 IEEE Recommended Practice on Characterization of Surges in Low-Voltage(1000V and Less) AC Power Circuits</li> <li>9. IEC 62301:2011 Household electrical appliances - Measurement of standby power</li> <li>10. NEMA 77-2017 Standard for Temporal Light Artifacts: Test Methods and Guidance for Acceptance Criteria</li> </ol>
Remark	<p>Below test and data are not covered by A2LA accreditation:</p> <ul style="list-style-type: none"> <li>- Operating Frequency</li> <li>- Noise</li> </ul>

## 1.5 Test Methods

### 1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $1^{\circ}$  vertical intervals and  $22.5^{\circ}$  horizontal intervals.



### 2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

### 3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

## 2.1 Summary of Test Result

Criteria Item	The Type of Luminaires	Requirement (ES for Luminaires V2.2)	Measured Value	Status
Input Wattage	All	$\leq$ Rated Wattage	7.488W	Pass
Luminous Efficacy	Inseparable Other SSL Luminaire	$\geq 70$ lm/W	74.58lm/W	Pass
Luminaire Minimum Light Output	Inseparable Other SSL Luminaire	$\geq 200$ lumens	558.45lm	Pass
Correlated Color Temperature (CCT)	Inseparable Other SSL Luminaire	Shall be capable of providing at least one of the following nominal correlated color temperatures (CCTs): • 2700 Kelvin • 3000 Kelvin • 3500 Kelvin • 4000 Kelvin • 5000 Kelvin	2732K Duv=-0.0008	Pass
Color Rendering Index (CRI)	Inseparable Other SSL Luminaire	$R_a \geq 80$ $R_9 > 0$	$R_a = 93.5$ $R_9 = 60$	Pass
Lumen Maintenance	Solid State Option 1:	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Light Source Life	Solid State	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Color Maintenance	Inseparable Other SSL Luminaire	$\Delta u'v' \leq 0.007$	Max. 0.00687 in LM-80 report*	Pass
Source Start Time	Inseparable Other SSL Luminaire	$< 750$ ms	68.0ms	Pass

Power Factor	Solid State	Total luminaire input power $\leq 5$ watts: PF $\geq 0.5$ Total luminaire input power > 5 watts: PF $\geq 0.7$	0.9436	Pass
Transient Protection	Solid State	The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.	Survival	Pass
Standby Power Consumption	All Luminaires	Luminaires shall not draw power in the off state.	0 W	Pass
Operating Frequency	Solid State	Frequency $\geq 120$ Hz	120.001Hz	Pass
Maximum Measured Driver Case Temperature	Solid State	shall not exceed the driver manufacturer's maximum recommended temperature during in situ operation. $\leq 105$ °C	40.6°C	Pass
Maximum In-Situ Source Temperature	Solid State	Maximum permitted Ts temperature for L70 $\geq$ 50,000 hrs $\leq 105$ °C	41.1°C	Pass
Dimming	Solid State	The luminaire and its components shall provide continuous dimming from 100% to 20% of total light output. Luminaire shall not emit noise above 24dBA at 1 meter or less at the minimum output.	Validated	Pass
CCT	Solid State	Packaging shall clearly describe the nominal color designation in units of Kelvin (e.g. 2700K, 3000K).	2700K,3000K, 3500K,4000K, 5000K	Pass

Note: The information or data with an “\*” are provided by the manufacturer.

Our laboratory has no responsibility for the decision of compliance with specification that based on the data or information with the “\*”.

<b>2.2.1 Electrical, Photometric and Chromaticity Measurements</b>	<b>IES LM-79 2008</b>
--	-----------------------

Test date	2021-04-07	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD6-5CT(Mode:2700K)	Total Operating Time (min)	75

**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
JCE210313-B1	120.0	60	0.0661	7.488	0.9436

**Sphere-Spectroradiometer Method(Self-absorption:1.0993):**


Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	93.5
R9	60
CCT (K)	2732
Duv	-0.0008

**Goniophotometer Method(Test Distance:26.000m):**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	558.45
Luminous Efficacy (lm/W)	74.58
Beam Angle°	99.3
Center Beam Candle Power (cd)	229



## Spectral Power Distribution and Chromaticity Diagram

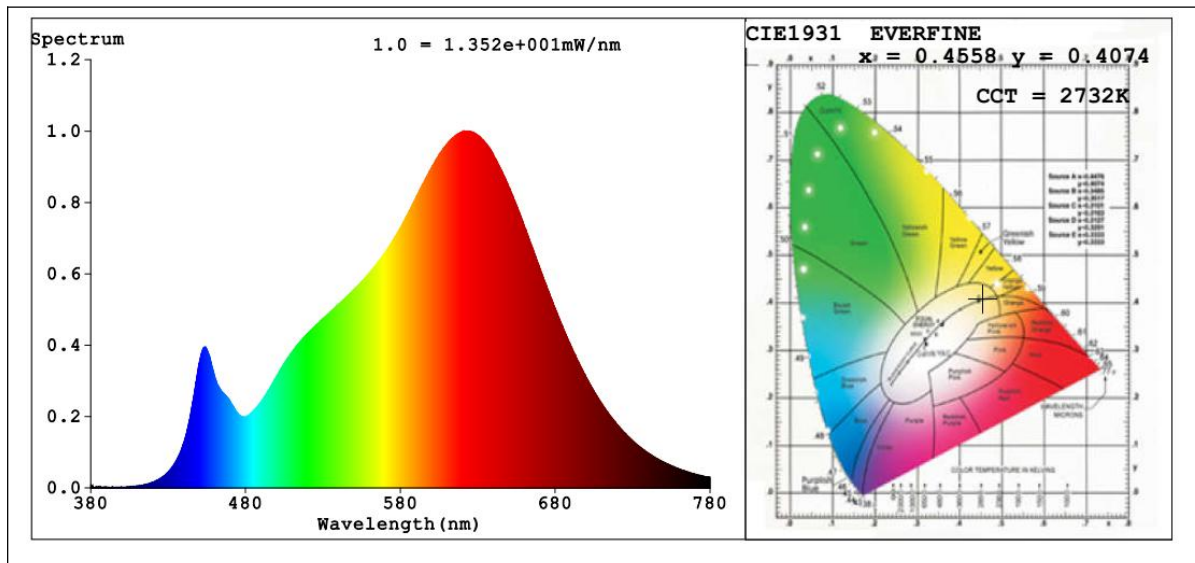

## Colorimetric Parameters

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.4558$   $y=0.4074$   $u'=0.2613$   $v'=0.5255$   $Du, Dv: 0.0002, -0.0008$

CCT=2732K ( $Duv=-0.0008$ ) Dominant WL:  $L_d = 584.3nm$  Purity=59.1%


Peak WL:  $L_p = 620.9nm$  FWHM=143.7nm

Render Index:  $R_a = 93.5$  Render Index: AvgR = 91.2

R1 = 94 R2 = 98 R3 = 99 R4 = 94 R5 = 94 R6 = 97 R7 = 91

R8 = 81 R9 = 60 R10 = 94 R11 = 96 R12 = 86 R13 = 96 R14 = 99 R15 = 90

## Zonal Lumen Tabulation

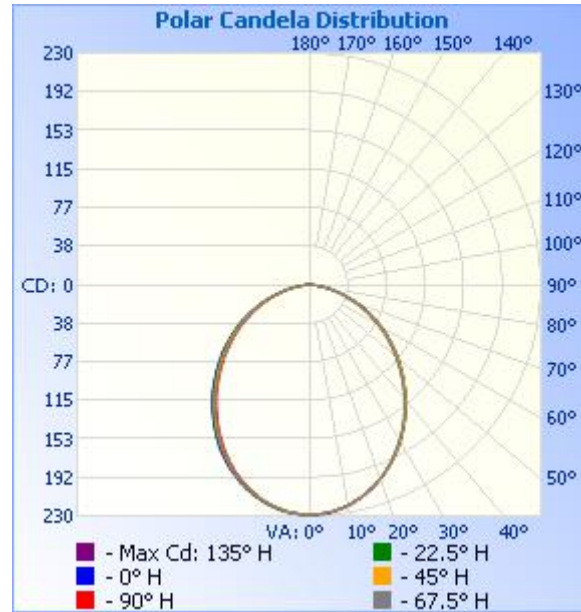

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	170.9	30.6%
0-40	273.1	48.9%
0-60	459.4	82.3%
60-90	99.0	17.7%
70-100	37.5	6.7%
90-120	0	0%
0-90	558.4	100%
90-180	0	0%
0-180	558.4	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	21.5	3.9%	90-100	0	0%
10-20	60.6	10.8%	100-110	0	0%
20-30	88.8	15.9%	110-120	0	0%
30-40	102.2	18.3%	120-130	0	0%
40-50	100.4	18.0%	130-140	0	0%
50-60	85.9	15.4%	140-150	0	0%
60-70	61.5	11.0%	150-160	0	0%
70-80	31.8	5.7%	160-170	0	0%
80-90	5.7	1.0%	170-180	0	0%



# ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107  
Tel: (+86)755-2319 2554  
Fax: (+86)755-2319 2815

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	229	229	229	229	229	229	229	229	229	229	229	229	229	229	229	229	229
1	228	229	229	229	228	229	229	228	228	228	228	229	228	229	229	229	228
2	228	228	228	229	228	229	229	228	229	228	228	228	228	228	229	228	228
3	228	228	228	228	228	228	228	228	228	228	228	228	228	228	228	228	228
4	228	227	228	227	228	228	229	228	228	228	228	228	227	227	228	227	228
5	228	227	227	227	227	228	227	227	228	227	227	228	227	227	227	226	228
6	226	226	227	227	227	227	227	227	227	226	226	227	226	226	226	226	226
7	225	226	225	226	226	226	226	226	226	226	225	225	225	225	225	225	225
8	224	225	225	224	225	225	225	225	225	225	224	224	224	224	224	224	224
9	224	224	224	224	224	224	225	224	224	224	223	223	223	223	223	223	224
10	223	223	223	222	223	223	223	223	223	223	222	222	222	222	222	222	223
11	221	221	222	221	222	222	222	222	222	221	220	220	220	220	221	221	221
12	219	220	220	220	220	220	220	220	220	220	219	219	219	219	219	219	219
13	218	218	219	219	219	219	219	219	219	218	218	218	217	217	218	218	218
14	217	217	217	217	217	217	217	218	217	217	216	216	215	216	216	216	217
15	216	215	216	215	216	216	216	216	216	216	215	214	213	214	214	215	216
16	213	213	214	213	213	214	214	214	214	214	213	212	211	212	213	213	213
17	211	212	212	212	212	212	212	212	212	212	210	211	209	210	210	211	211
18	210	210	209	209	210	210	210	210	211	209	209	208	207	208	209	209	210
19	207	208	208	207	207	208	208	208	209	208	207	206	205	206	207	207	207
20	206	206	205	205	205	206	206	207	206	205	205	204	203	204	205	205	206
21	203	204	204	203	203	204	204	204	204	203	202	201	201	201	202	203	203
22	201	201	201	201	201	201	202	202	202	201	200	199	198	199	200	200	201
23	198	199	199	198	199	199	199	200	200	198	198	197	195	197	197	198	198
24	196	197	196	196	196	196	197	198	197	196	195	194	193	194	194	195	196
25	194	194	194	193	194	194	194	195	195	194	192	191	190	191	192	193	194
26	191	191	191	191	191	191	192	192	192	191	190	189	187	188	189	190	191
27	188	189	189	188	188	188	189	189	190	188	187	186	184	185	187	188	188
28	185	186	186	184	185	185	186	187	187	185	184	183	181	183	184	185	185
29	182	183	183	182	183	183	183	184	184	183	181	180	178	179	180	182	182
30	180	180	180	179	180	179	181	181	181	180	178	177	175	176	178	179	180

Project No.:JCE210313 Report No.:JCE210313-B

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



# ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

31	177	177	177	176	176	176	177	178	178	177	175	174	172	173	175	176	177
32	174	174	175	173	174	173	174	175	175	174	172	170	169	170	172	173	174
33	171	171	171	170	171	170	171	172	172	171	169	167	166	167	169	170	171
34	168	168	168	166	167	167	168	169	169	168	166	164	163	164	165	167	168
35	165	165	165	164	164	164	165	166	166	164	163	161	159	160	162	164	165
36	162	162	162	160	161	161	162	163	162	161	159	158	156	157	159	160	162
37	158	159	159	157	158	157	158	159	159	158	156	154	153	154	155	157	158
38	155	155	155	153	154	154	155	156	156	155	152	151	150	151	152	154	155
39	152	152	152	150	151	151	152	153	153	152	149	148	146	147	149	151	152
40	148	149	149	147	148	148	148	150	149	148	146	144	143	144	146	148	148
41	145	146	145	143	144	144	145	147	146	145	143	141	139	140	142	144	145
42	142	142	142	140	141	141	142	143	143	142	139	137	136	137	139	141	142
43	139	139	139	137	137	138	138	140	140	138	136	134	132	133	136	138	139
44	136	135	136	133	134	134	134	136	136	135	132	130	129	130	132	134	136
45	133	132	132	130	131	131	131	133	133	131	129	127	125	127	129	131	133
46	129	129	129	126	127	127	128	130	129	128	125	123	122	123	125	127	129
47	126	125	125	123	124	124	124	126	126	125	122	120	118	120	122	124	126
48	122	122	122	119	120	120	121	123	122	121	119	116	115	117	118	121	122
49	119	119	118	116	116	117	118	119	119	118	115	113	112	113	115	118	119
50	116	115	115	113	113	113	114	116	115	114	112	110	108	110	112	114	116
51	112	112	112	109	110	110	111	113	112	110	109	106	105	106	108	111	112
52	109	109	108	106	106	107	107	109	109	107	105	103	101	103	105	108	109
53	106	106	105	103	103	103	104	106	106	104	102	99	98	99	101	104	106
54	102	102	101	99	99	100	101	102	102	101	99	96	94	96	98	101	102
55	99	98	98	96	96	96	97	99	98	97	95	92	91	92	94	98	99
56	95	95	94	92	92	93	94	95	95	94	92	89	88	89	91	94	95
57	92	92	91	89	89	89	90	92	92	91	89	85	84	86	88	91	92
58	89	88	88	85	85	86	87	88	88	87	85	82	81	82	84	87	89
59	85	85	84	82	82	82	84	85	84	84	82	79	78	79	81	84	85
60	82	81	81	78	79	79	80	81	81	80	78	75	74	75	78	81	82
61	78	78	77	75	75	75	77	78	78	76	75	72	71	72	74	77	78
62	75	75	74	71	72	72	74	74	74	73	71	69	68	69	71	74	75

Project No.:JCE210313 Report No.:JCE210313-B

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



# ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

63	72	72	71	68	68	69	70	71	71	70	68	65	64	65	68	70	72
64	68	68	67	65	65	65	66	68	67	66	65	62	61	62	65	67	68
65	65	65	64	61	62	62	63	64	64	63	61	59	58	59	61	64	65
66	62	62	60	58	58	59	60	61	61	59	58	56	54	55	58	61	62
67	58	58	57	55	55	55	56	58	57	56	55	52	51	52	55	57	58
68	55	54	54	51	52	52	53	54	54	53	51	49	48	49	52	54	55
69	51	51	50	48	48	49	50	51	50	49	48	46	45	46	48	51	51
70	48	48	47	45	45	45	46	47	47	46	45	43	42	43	45	47	48
71	45	45	44	42	42	42	43	44	44	43	41	40	39	40	42	44	45
72	41	41	41	39	39	39	40	41	40	40	38	37	35	36	39	41	41
73	38	38	38	35	35	36	37	37	37	36	35	34	32	33	36	37	38
74	35	35	34	33	32	33	34	34	34	33	32	31	29	30	33	34	35
75	31	32	31	30	29	30	31	31	30	30	29	28	27	28	30	31	31
76	28	29	28	27	27	27	27	28	27	27	26	25	24	25	27	28	28
77	25	26	25	24	24	24	25	25	24	24	23	22	21	22	24	25	25
78	23	23	22	22	21	21	22	22	21	21	20	19	18	19	21	22	23
79	20	20	19	19	18	18	19	19	19	18	17	16	16	17	18	20	20
80	17	17	17	16	15	16	16	17	16	16	15	14	13	14	16	17	17
81	14	15	14	14	13	13	14	14	13	13	12	11	11	12	13	14	14
82	12	12	11	11	10	10	11	11	11	11	10	9	9	9	11	12	12
83	9	10	9	9	8	8	9	9	8	8	7	6	7	7	8	9	9
84	7	7	7	6	6	6	6	7	6	6	5	4	5	5	6	7	7
85	5	5	5	4	4	4	4	4	4	4	3	2	3	3	4	5	5
86	3	3	3	2	2	2	2	2	2	1	1	1	2	2	2	3	3
87	1	1	1	1	1	0	0	1	0	0	0	0	1	1	1	1	1
88	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
89	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
92	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
93	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
94	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-B

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xihu Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

95	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
96	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
97	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
101	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
102	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
103	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
104	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
106	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
107	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
108	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
109	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
111	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
112	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
113	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
114	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
115	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
116	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
117	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
118	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
119	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
121	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
122	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
123	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-B

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

127	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
129	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
131	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
132	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
133	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
134	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
136	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
137	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
138	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
141	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
142	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
143	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
144	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
146	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
147	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
148	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
149	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
151	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
154	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
156	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
157	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
158	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

159	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0



<b>2.2.2 Electrical, Photometric and Chromaticity Measurements</b>	<b>IES LM-79 2008</b>
--	-----------------------

Test date	2021-04-07	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD6-5CT(Mode:3000K)	Total Operating Time (min)	61


**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
JCE210313-B1	120.0	60	0.0668	7.445	0.9286

**Sphere-Spectroradiometer Method(Self-absorption:1.0993):**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.6
R9	68
CCT (K)	3068
Duv	-0.0034
Total Luminous (lm)	574.5
Luminous Efficacy (lm/W)	77.17

## Spectral Power Distribution and Chromaticity Diagram

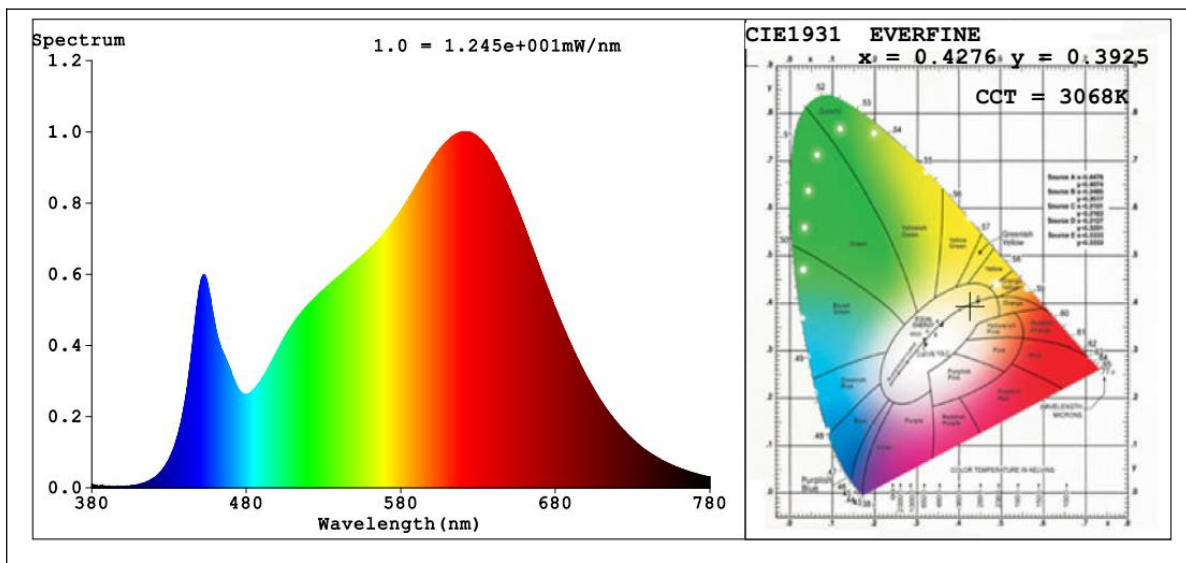

## Colorimetric Parameters

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.4276, y=0.3925, u'=0.2495, v'=0.5153$   $Du, Dv: 0.0013, -0.0031$

$\text{CCT}=3068\text{K} (Duv=-0.0034)$  Dominant WL:  $\text{Ld} = 583.9\text{nm}$  Purity=46.1%

Peak WL:  $\text{Lp}=620.9\text{nm}$  FWHM=163.3nm

Render Index:  $\text{Ra}=94.6$  Render Index:  $\text{AvgR} = 92.6$

R1 =96 R2 =98 R3 =98 R4 =95 R5 =96 R6 =96 R7 =92

R8 =85 R9 =68 R10=95 R11=96 R12=84 R13=97 R14=99 R15=93

<b>2.2.3 Electrical, Photometric and Chromaticity Measurements</b>	<b>IES LM-79 2008</b>
--	-----------------------

Test date	2021-04-07	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD6-5CT(Mode:3500K)	Total Operating Time (min)	61


**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
JCE210313-B1	120.0	60	0.0667	7.437	0.9296

**Sphere-Spectroradiometer Method(Self-absorption:1.0993):**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	95.3
R9	75
CCT (K)	3558
Duv	-0.0042
Total Luminous (lm)	591.7
Luminous Efficacy (lm/W)	79.56

## Spectral Power Distribution and Chromaticity Diagram

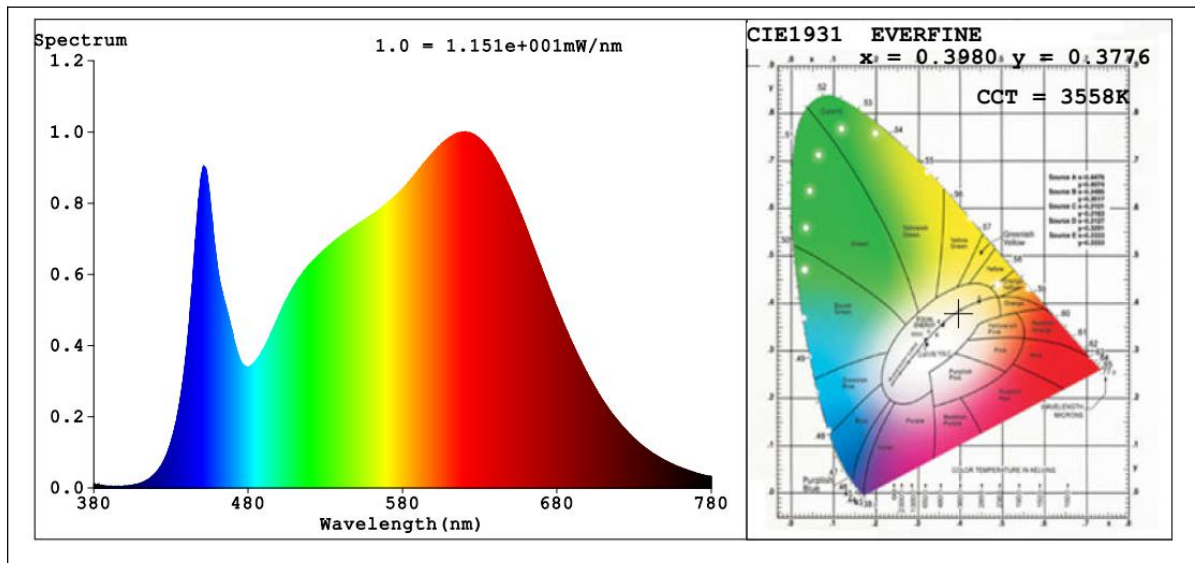

## Colorimetric Parameters

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.3980$   $y=0.3776$   $u'=0.2363$   $v'=0.5046$   $Du, Dv: 0.0020, -0.0037$

CCT=3558K ( $Duv=-0.0042$ ) Dominant WL:  $\lambda_d = 582.8\text{nm}$  Purity=32.7%

Peak WL:  $\lambda_p = 620.9\text{nm}$  FWHM=179.1nm

Render Index:  $R_a = 95.3$  Render Index: AvgR = 93.3

R1 = 97 R2 = 98 R3 = 97 R4 = 96 R5 = 96 R6 = 95 R7 = 94

R8 = 89 R9 = 75 R10 = 94 R11 = 96 R12 = 81 R13 = 98 R14 = 98 R15 = 95

<b>2.2.4 Electrical, Photometric and Chromaticity Measurements</b>	<b>IES LM-79 2008</b>
--	-----------------------

Test date	2021-04-07	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD6-5CT(Mode:4000K)	Total Operating Time (min)	61


**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
JCE210313-B1	120.0	60	0.0664	7.408	0.9292

**Sphere-Spectroradiometer Method(Self-absorption:1.0993):**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	95.0
R9	78
CCT (K)	4170
Duv	-0.0034
Total Luminous (lm)	605.4
Luminous Efficacy (lm/W)	81.72

## Spectral Power Distribution and Chromaticity Diagram

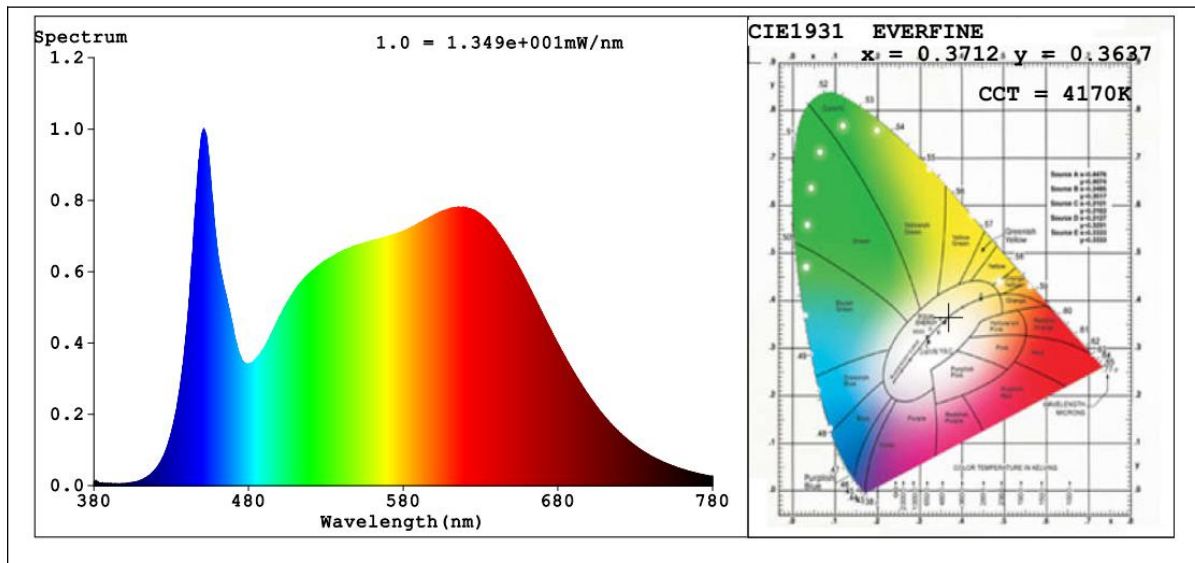

## Colorimetric Parameters

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.3712$   $y=0.3637$   $u'=0.2242$   $v'=0.4943$   $Du, Dv: 0.0020, -0.0028$

$\text{CCT}=4170\text{K}$  ( $Duv=-0.0034$ ) Dominant WL:  $\lambda_d = 580.8\text{nm}$  Purity=20.5%

Peak WL:  $\lambda_p = 451.0\text{nm}$  FWHM=25.9nm

Render Index:  $R_a=95.0$  Render Index: AvgR =92.6

R1 =96 R2 =97 R3 =95 R4 =95 R5 =95 R6 =94 R7 =95

R8 =91 R9 =78 R10=92 R11=95 R12=75 R13=97 R14=97 R15=96

<b>2.2.5 Electrical, Photometric and Chromaticity Measurements</b>	<b>IES LM-79 2008</b>
--	-----------------------

Test date	2021-04-07	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD6-5CT(Mode:5000K)	Total Operating Time (min)	61


**Electrical Measurement:**

Sample No.	Voltage (Vac)	Frequency (Hz )	Current (A)	Power (W)	Power Factor
JCE210313-B1	120.0	60	0.0665	7.408	0.9290

**Sphere-Spectroradiometer Method(Self-absorption:1.0993):**

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	93.2
R9	72
CCT (K)	5189
Duv	-0.0002
Total Luminous (lm)	619.5
Luminous Efficacy (lm/W)	83.63

## Spectral Power Distribution and Chromaticity Diagram

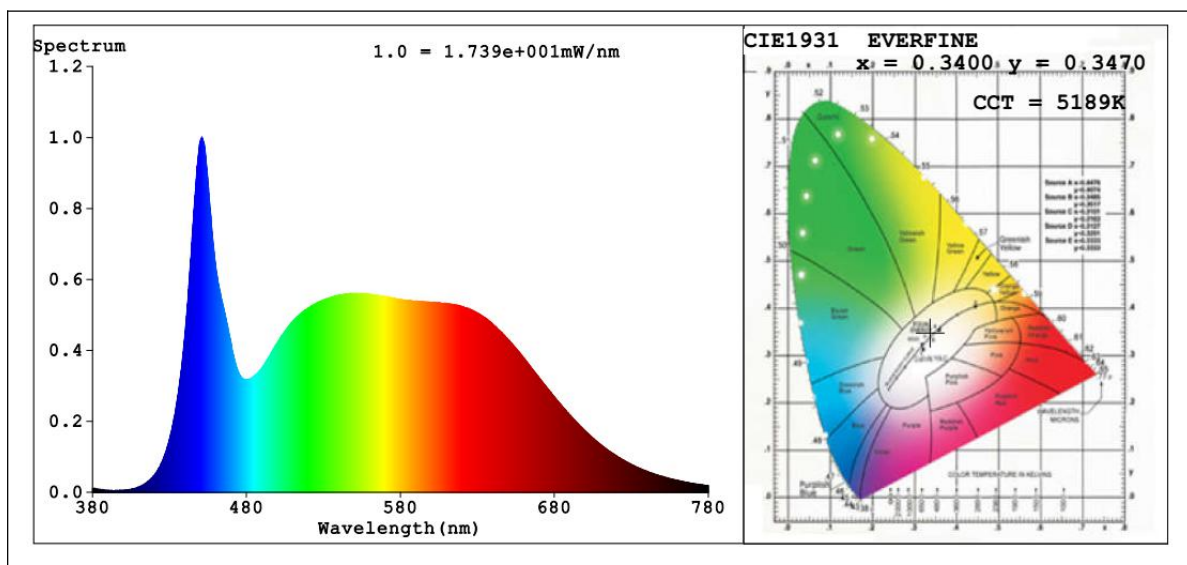

## Colorimetric Parameters

### Colorimetric Parameters

Chromaticity Coordinate:  $x=0.3400$   $y=0.3470$   $u'=0.2097$   $v'=0.4816$   $Du, Dv: 0.0002, -0.0002$

$\text{CCT}=5189\text{K}$  ( $Duv=-0.0002$ ) Dominant WL:  $\lambda_d = 569.7\text{nm}$  Purity=6.1%

Peak WL:  $\lambda_p = 451.0\text{nm}$  FWHM=25.0nm

Render Index:  $R_a = 93.2$  Render Index: AvgR = 90.3


R1 = 94 R2 = 95 R3 = 93 R4 = 94 R5 = 94 R6 = 91 R7 = 95

R8 = 90 R9 = 72 R10 = 86 R11 = 94 R12 = 73 R13 = 94 R14 = 96 R15 = 94



<b>2.3 Electrical and Photometric Measurements, with dimming</b>	<b>IES LM-79 2008 ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2</b>
<b>Noted: The noise test and data are not covered by A2LA accreditation</b>	

Test date	2021-04-07		Test Ambient:	25±1° C
Dimmer Technology			Forward phase-cut	
Sample No.			Maximum Level	Minimum Level
JCE210313-B1	Input:	Light outout(Lumen)	526.2	20.22
	120.0V / 60Hz	Percentage	94.23%	3.84%

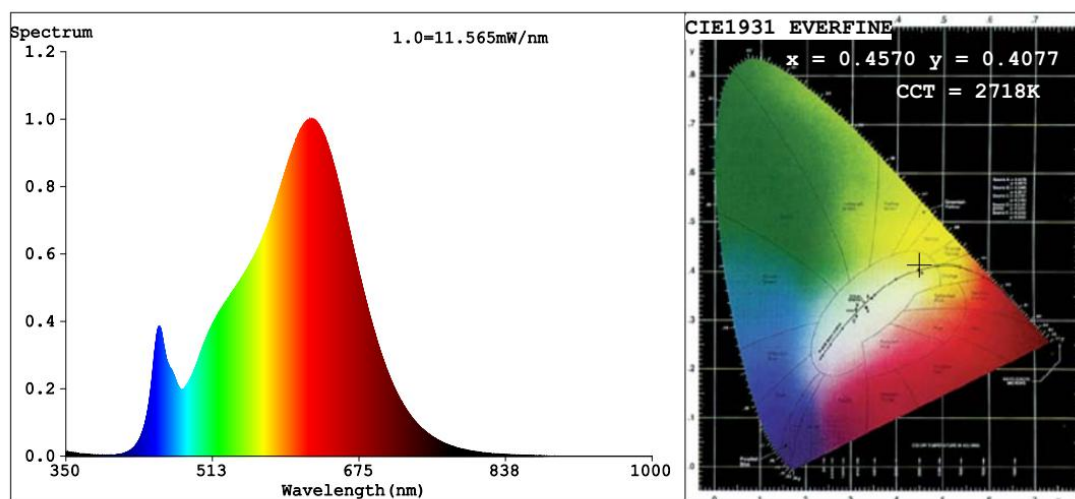

### Color Parameters:

Chromaticity Coordinate:  $x=0.4570$   $y=0.4077$   $u'=0.2619$   $v'=0.5258$   
CCT=2718K (Duv=-0.0008) Dominant WL:Ld =584.4nm WL:Lc = --nm Purity=59.6%  
Ratio:R=26.5% G=70.9% B=2.6% Peak WL:Lp=620.4nm FWHM=141.1nm  
Render Index:Ra=93.1 AvgR=90.8 TM30:Rf=92 Rg=99

R1 =94 R2 =98 R3 =98 R4 =93 R5 =94 R6 =97 R7 =90  
R8 =80 R9 =58 R10=94 R11=95 R12=86 R13=95 R14=100 R15=89

The luminaires [can] ~~lean not~~ provide less than 20% of total light output with continuous dimmer.

Dimmer	Peak Noise Reading (dBA)	Test Condition	Distance between the microphone and the UUT
LUTRON MACL-153M	14.3	Dimmer adjusted to lowest light output	< 1 m



## ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xihu Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815


<b>2.4 Flicker</b>	<b>NEMA 77-2017</b> <b>ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2</b>
--------------------	---

<b>Dimming Technology</b>	Forward phase-cut
<b>Dimmer</b>	LUTRON MACL-153M

Item	Short Term Flicker Indicator (Pst)	Stroboscopic Visibility Measure (SVM)
<b>Maximum conduction</b>	0.092	0.711
<b>Intermediate conduction</b>	0.256	1.024
<b>Minimum conduction</b>	0.947	0.425

<b>2.5 Operating Frequency</b>	<b>ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2</b>
<b>Noted: This test and data are not covered by A2LA accreditation</b>	


<b>Test date</b>	<b>2021-04-07</b>	<b>Test Ambient:</b>	<b>25±1° C</b>
<b>Sample No.</b>	<b>Operating Frequency (Hz)</b>		
JCE210313-B1	120.001		

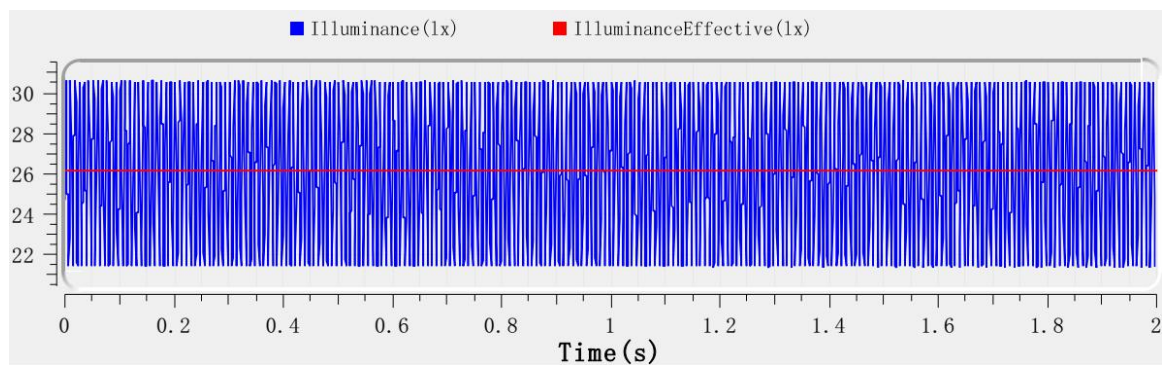

2.6 Starting Time	ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
-------------------	---

Test date	2021-04-07	Test Ambient:	25±1° C
Sample No.	Start Time (ms)		
JCE210313-B1	68.0		

**Graph (Start Time):**

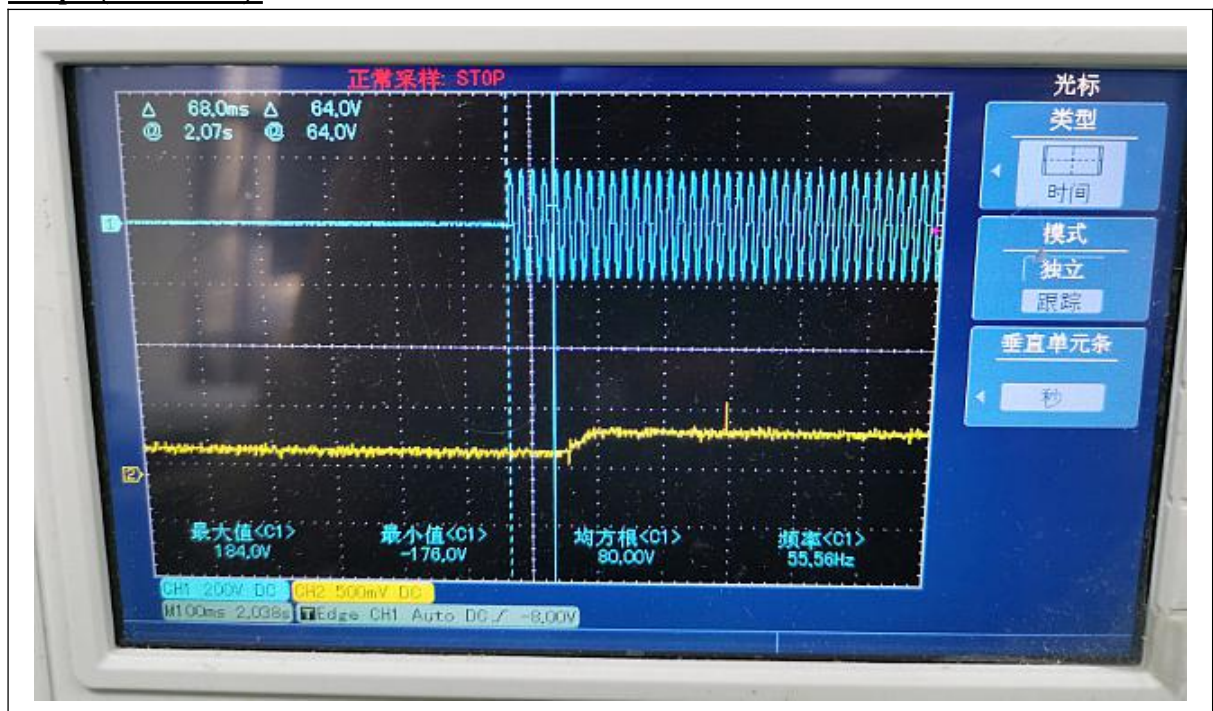



# ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107  
 Tel: (+86)755-2319 2554  
 Fax: (+86)755-2319 2815

<b>2.7 Transient Protection Test</b>	<b>ANSI/IEEE C62.41 ENERGY STAR® Program Requirements for Luminaires – Version 2.2</b>
--------------------------------------	--


## **Test voltage: 120V,60Hz**

<b>Test date</b>	2021-04-07	<b>Test Ambient</b>	25±1° C
<b>Sample No.</b>		<b>Transient Protection Test - Seven Strikes</b>	
JCE210313-B1		Survival	

<b>2.8 In-Situ Temperature Measurement Test (ISTMT)</b>	<b>UL1598-2008, 3<sup>rd</sup> Edition</b>
---	--

Test date	2021-04-07	Test Ambient	25±5° C
Input Vol./Frequency	120.0V / 60Hz	Output Current of Single LED(mA)	57.32
Sample No.	LED Package Model	Maximum Measured LED Ts Point Temperature (°C)	Maximum permitted Ts temperature for L70≥ 50,000 hrs (°C)
JCE210313-B1	67-21S Series	41.1	105

**In-Situ Picture - Ts:**

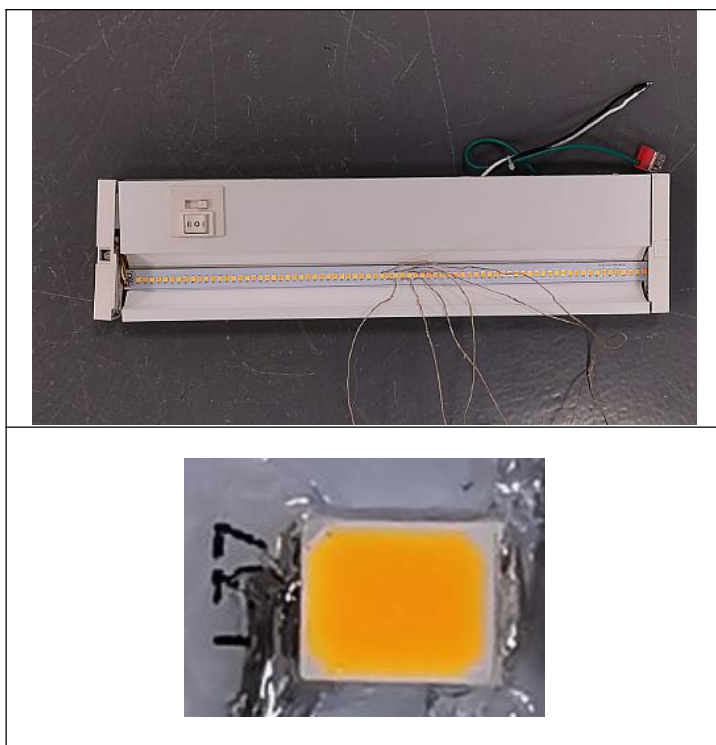

<b>2.9 Maximum Measured Ballast or Driver Case Temperature</b>	<b>UL1598-2008, 3<sup>rd</sup> Edition</b>
--	--

Test date	2021-04-07	Test Ambient	25±5° C
Sample No.	Maximum Measured Driver Case Temperature (°C)	Maximum Driver Case Temperature Limited (°C)	
JCE210313-B1	40.6	105	

**In-Situ Picture - Ts:**







# ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107  
 Tel: (+86)755-2319 2554  
 Fax: (+86)755-2319 2815

<b>2.10 Standby Power Consumption:</b>	<b>ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2</b>
--	--

<b>Test date</b>	2021-04-07	<b>Test Ambient:</b>	25±1° C
<b>Model Number</b>	ULD6-5CT(Mode:2700K)	<b>Stabilization Time (min)</b>	60

## Electrical Measurement – when the luminaires turned off:

<b>Sample No.</b>	<b>Standby Power Consumption(W):</b>
JCE210313-B1	0





### 3. Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-S-451	2 meter Integrating Sphere	Verified by D204 standard lamp	
ST-R-S-455	Spectral analysis system HAAS-1200	Verified by D204 standard lamp	
ST-R-S-452	Standard Lamp D204	2021-04-15	2022-04-14
ST-R-S-453	Power Meter for Integrating Sphere	2021-04-07	2022-04-06
ST-R-S-407	Goniophotometer system	Verified by S1530039 standard lamp	
ST-R-S-410	Standard Lamp S1530039	2021-04-15	2022-04-14
ST-R-S-408	Power Meter for Goniophotometer	2021-04-07	2022-04-06
ST-R-S-027	Digital Luxmeter	2021-04-08	2022-04-07
ST-R-S-016	Oscilloscope	2021-04-07	2022-04-06
ST-R-S-017	Probe	2021-04-08	2022-04-07
ST-R-361	ZLB61012X	2020-08-19	2021-08-20
ST-R-414	LFA-3000	2020-12-18	2021-12-17
Uncertainty: Photometric Measurement (Sphere):2.72%, k=2 Chromaticity Measurement(Sphere):43.60K, k=2 Photometric Measurement(Goniophotometer): 3.44%, k=2			

\*\*\*\*\* END OF DATASHEET PACKAGE \*\*\*\*\*