



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

Energy Star Test Report

For

L-TECH CORPORATION

(Brand Name:N/A)

Shaogangtou District, Qiaotou Town, Dongguan City

Model name(s):
ULD10-5CT

Report Type: Testing and Report According to ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

Type of Luminaire: Inseparable Other SSL Luminaire

Report Date: 2021-04-20

Test & Report By:

Garman Mo

Engineer: Garman Mo

Review By:

Johnson Sun

Manager: Johnson Sun

- Note: 1.The results contained in this report pertain only to the tested samples.
2.This report does not imply product certification, approval, or endorsement by A2LA or any agency of the Federal Government.
3.This report contains data that are not covered by the A2LA accreditation.

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1



<http://www.new-standard-test.com/>

1 / 33

1.1 Product Information:		
Model Number	ULD10-5CT	
Remark	According to the test data, 2700K is the most consumptive mode.	
Representative (Tested) Model	ULD10-5CT(Mode:2700K) ULD10-5CT(Mode:3000K) ULD10-5CT(Mode:3500K) ULD10-5CT(Mode:4000K) ULD10-5CT(Mode:5000K)	
Model Difference	N/A	
SKU (if available)	N/A	
Type of Luminaire (for integral lamps, list base type and lamp type)	Inseparable Other SSL Luminaire	
LED Manufacturer	EVERLIGHT ELECTRONICS CO., LTD	
LED Model	67-21S Series	
Dimming	10%-100%	
Sample Number	JCE210313-E1	
Date of Receipt	2021-04-05	
Luminaire Aperture (for Downlight retrofits)	--	in.
Luminaire Length	--	mm
Luminaires Width	--	mm
Number of Units (modular products)	N/A	s

1.2 Rated Values:	
Rated Voltage / Frequency	120V,50/60Hz
Nominal Power	13W
Rated Initial Lamp Lumen	--
Declared CCT	2700K,3000K,3500K,4000K,5000K

1.3 Product Photos

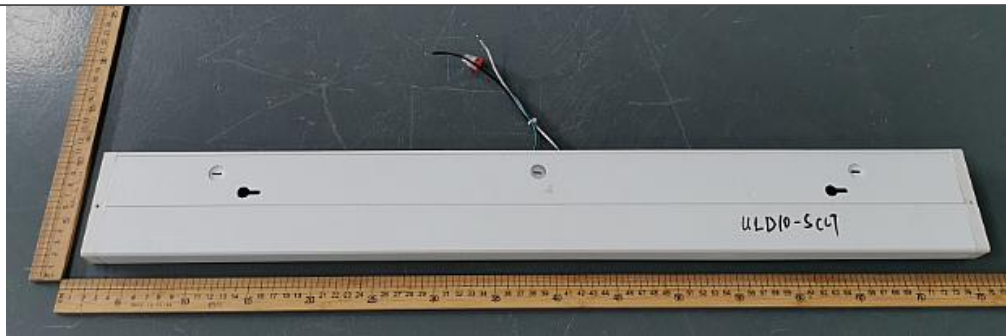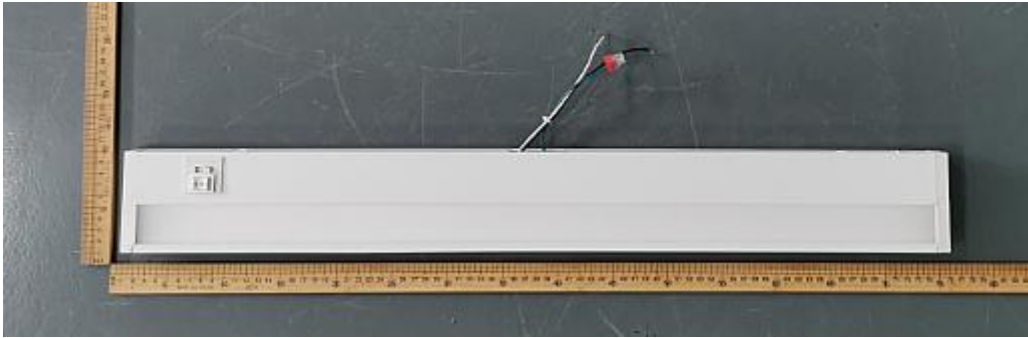

1.4 Test Specifications:

Test item	<ol style="list-style-type: none"> 1. Total Luminous Flux 2. Luminous Distribution Intensity 3. Luminous Efficacy 4. Correlated Color Temperature 5. Color Rendering Index 6. Chromaticity Coordinate 7. Electrical Parameters 8. Color Angular Uniformity 9. Dimming 10. Flicker 11. Operating Frequency 12. Starting Time 13. Transient Protection Test 14. In-Situ Temperature Measurement Test 15. Standby Power Consumption
Reference Standard	<ol style="list-style-type: none"> 1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products 2. ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products 3. C82.77-10:2014 American National Standard for Lighting Equipment-Harmonic Emission Limits-Related Power Quality Requirements 4. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources 5. CIE 15-2004 Technical Report Colorimetry 6. UL1993 4th Edition, Self-Ballasted Lamps and Lamp Adapters 7. ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) – Version 2.2 8. ANSI/IEEE C62.41.2:2002 IEEE Recommended Practice on Characterization of Surges in Low-Voltage(1000V and Less) AC Power Circuits 9. IEC 62301:2011 Household electrical appliances - Measurement of standby power 10. NEMA 77-2017 Standard for Temporal Light Artifacts: Test Methods and Guidance for Acceptance Criteria
Remark	<p>Below test and data are not covered by A2LA accreditation:</p> <ul style="list-style-type: none"> - Operating Frequency - Noise

1.5 Test Methods

1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1° vertical intervals and 22.5° horizontal intervals.



2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

2.1 Summary of Test Result

Criteria Item	The Type of Luminaires	Requirement (ES for Luminaires V2.2)	Measured Value	Status
Input Wattage	All	\leq Rated Wattage	11.09W	Pass
Luminous Efficacy	Inseparable Other SSL Luminaire	≥ 70 lm/W	87.66lm/W	Pass
Luminaire Minimum Light Output	Inseparable Other SSL Luminaire	≥ 200 lumens	972.48lm	Pass
Correlated Color Temperature (CCT)	Inseparable Other SSL Luminaire	Shall be capable of providing at least one of the following nominal correlated color temperatures (CCTs): <ul style="list-style-type: none"> • 2700 Kelvin • 3000 Kelvin • 3500 Kelvin • 4000 Kelvin • 5000 Kelvin 	2734K Duv=-0.0007	Pass
Color Rendering Index (CRI)	Inseparable Other SSL Luminaire	$R_a \geq 80$ $R_9 > 0$	$R_a = 94.0$ $R_9 = 62$	Pass
Lumen Maintenance	Solid State Option 1:	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Light Source Life	Solid State	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Color Maintenance	Inseparable Other SSL Luminaire	$\Delta u'v' \leq 0.007$	Max. 0.00687 in LM-80 report*	Pass
Source Start Time	Inseparable Other SSL Luminaire	< 750 ms	54.0ms	Pass

Power Factor	Solid State	Total luminaire input power ≤ 5 watts: PF ≥ 0.5 Total luminaire input power > 5 watts: PF ≥ 0.7	0.9570	Pass
Transient Protection	Solid State	The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.	Survival	Pass
Standby Power Consumption	All Luminaires	Luminaires shall not draw power in the off state.	0 W	Pass
Operating Frequency	Solid State	Frequency ≥ 120 Hz	120.001Hz	Pass
Maximum Measured Driver Case Temperature	Solid State	shall not exceed the driver manufacturer's maximum recommended temperature during in situ operation. ≤ 105 °C	33.1°C	Pass
Maximum In-Situ Source Temperature	Solid State	Maximum permitted Ts temperature for L70 \geq 50,000 hrs ≤ 105 °C	39.8°C	Pass
Dimming	Solid State	The luminaire and its components shall provide continuous dimming from 100% to 20% of total light output. Luminaire shall not emit noise above 24dBA at 1 meter or less at the minimum output.	Validated	Pass
CCT	Solid State	Packaging shall clearly describe the nominal color designation in units of Kelvin (e.g. 2700K, 3000K).	2700K,3000K, 3500K,4000K, 5000K	Pass

Note: The information or data with an “*” are provided by the manufacturer.

Our laboratory has no responsibility for the decision of compliance with specification that based on the data or information with the “*”.

2.2.1 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD10-5CT(Mode:2700K)	Total Operating Time (min)	75

Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-E1	120.2	60	0.0965	11.09	0.9570


Sphere-Spectroradiometer Method(Self-absorption:1.1053):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.0
R9	62
CCT (K)	2734
Duv	-0.0007

Goniophotometer Method(Test Distance:26.000m):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	972.48
Luminous Efficacy (lm/W)	87.66
Beam Angle°	98.1
Center Beam Candle Power (cd)	403

Spectral Power Distribution and Chromaticity Diagram

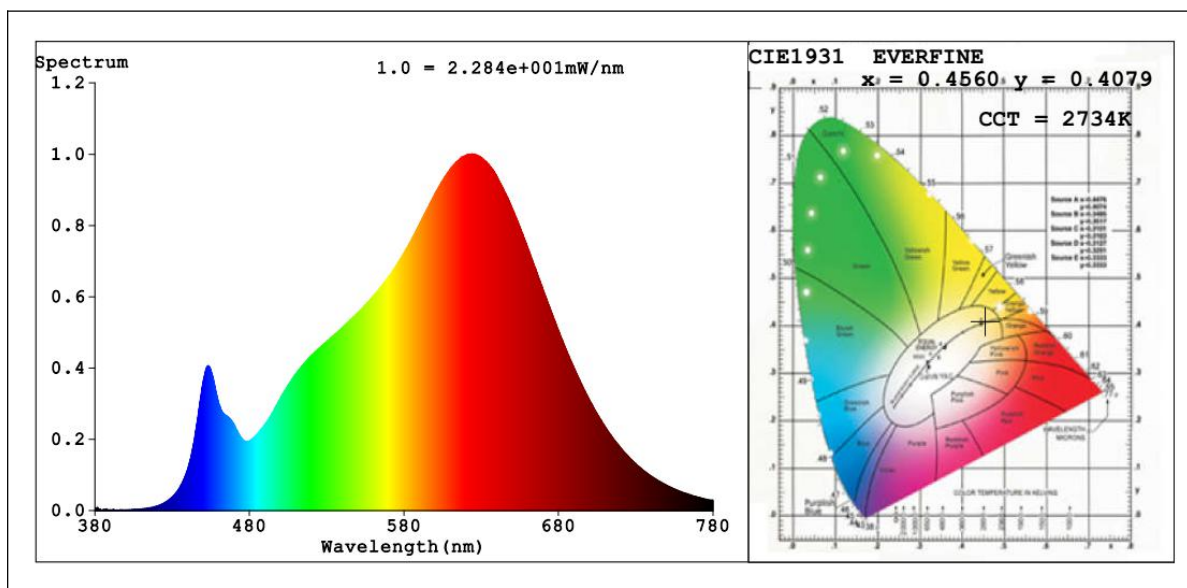

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4560, y=0.4079, u'=0.2612, v'=0.5257, Du, Dv: 0.0002, -0.0006$

$\text{CCT}=2734\text{K} (Duv=-0.0007)$ Dominant WL: $\text{Ld} = 584.3\text{nm}$ Purity=59.3%


Peak WL: $\text{Lp}=623.9\text{nm}$ FWHM=143.7nm

Render Index: $\text{Ra}=94.0$ Render Index: $\text{AvgR} = 91.7$

R1 =95 R2 =98 R3 =99 R4 =94 R5 =95 R6 =97 R7 =91

R8 =82 R9 =62 R10=95 R11=96 R12=85 R13=96 R14=99 R15=90

Zonal Lumen Tabulation

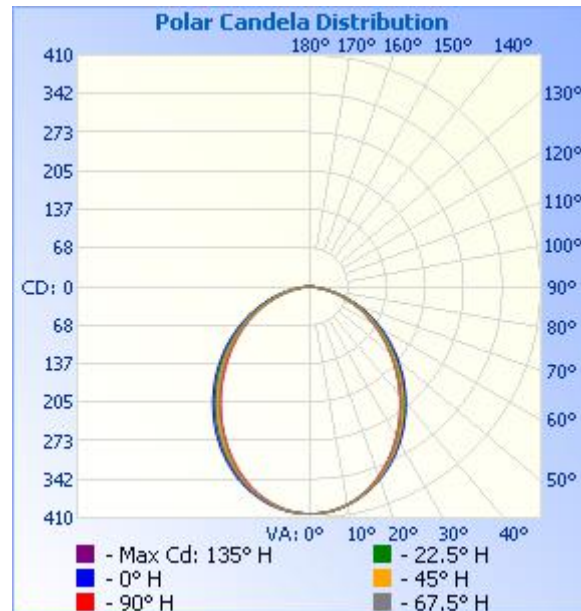

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	299.2	30.8%
0-40	476.6	49%
0-60	797.9	82.1%
60-90	174.5	17.9%
70-100	68.4	7%
90-120	0	0%
0-90	972.4	100%
90-180	0.0	0%
0-180	972.4	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	37.9	3.9%	90-100	0	0%
10-20	106.3	10.9%	100-110	0	0%
20-30	155.0	15.9%	110-120	0	0%
30-40	177.4	18.2%	120-130	0	0%
40-50	173.5	17.8%	130-140	0	0%
50-60	147.8	15.2%	140-150	0	0%
60-70	106.1	10.9%	150-160	0	0%
70-80	56.2	5.8%	160-170	0.0	0%
80-90	12.2	1.3%	170-180	0.0	0%



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	403	403	403	403	403	403	403	403	403	403	403	403	403	403	403	403	403
1	403	403	403	403	403	403	403	402	403	403	403	403	402	402	402	402	403
2	402	402	403	402	403	402	403	402	402	402	402	402	402	402	402	402	402
3	402	402	402	402	402	402	402	402	402	401	402	401	401	401	401	402	402
4	401	401	401	401	401	401	401	401	401	400	400	400	400	400	400	401	401
5	400	400	400	400	400	400	401	400	400	399	399	399	399	399	399	400	400
6	399	399	399	399	399	399	399	399	399	398	398	398	397	397	398	399	399
7	398	398	398	397	397	397	398	398	397	397	396	396	395	396	397	397	398
8	396	396	396	396	396	396	396	396	396	395	395	394	393	394	395	396	396
9	395	394	395	394	394	393	394	394	394	393	393	392	391	392	393	394	395
10	393	392	393	391	391	391	392	392	392	391	390	390	389	389	391	392	393
11	391	390	390	389	389	389	390	390	390	389	388	387	386	387	389	390	391
12	388	387	388	386	386	386	388	388	388	386	385	384	383	384	386	387	388
13	386	385	385	384	384	383	385	385	385	384	382	381	380	381	383	384	386
14	383	382	382	380	381	380	382	382	383	381	379	378	377	378	380	382	383
15	380	379	379	377	377	377	379	379	380	378	377	375	373	375	377	379	380
16	377	376	376	374	374	373	376	376	377	374	373	371	369	371	374	375	377
17	374	373	373	370	370	370	373	373	374	371	370	367	365	367	371	372	374
18	371	369	369	366	366	366	369	369	371	368	366	363	361	363	367	369	371
19	368	366	365	363	362	362	365	366	367	364	362	359	357	359	363	365	368
20	364	362	361	358	358	358	361	362	363	360	358	355	353	355	359	361	364
21	360	358	357	354	353	353	357	358	360	356	353	350	348	350	355	358	360
22	356	354	353	350	349	349	353	354	355	352	349	345	343	346	350	354	356
23	352	350	349	345	344	344	348	350	351	347	345	341	338	341	346	349	352
24	348	345	344	340	339	339	343	346	347	343	340	336	334	336	341	345	348
25	344	341	339	335	334	334	339	341	343	338	335	331	328	331	337	340	344
26	339	336	335	330	329	329	334	337	338	333	330	326	323	325	332	336	339
27	334	331	330	325	324	324	329	332	333	329	325	320	318	320	327	331	334
28	330	326	325	320	318	319	324	327	329	324	320	315	312	315	322	326	330
29	325	322	320	314	313	313	319	322	324	319	315	310	307	309	316	321	325
30	320	316	314	309	307	308	313	317	319	313	310	304	301	304	311	316	320

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

31	315	311	309	303	302	302	308	312	314	308	304	298	295	298	306	311	315
32	310	306	304	298	296	296	302	307	308	303	299	293	290	293	300	306	310
33	304	300	298	292	291	291	296	301	303	298	293	287	284	287	295	300	304
34	299	295	293	286	285	285	291	296	298	292	288	281	278	282	289	295	299
35	293	289	287	280	279	279	285	290	292	287	282	276	272	276	284	290	293
36	288	284	281	274	273	273	279	285	287	281	276	270	266	270	278	284	288
37	283	278	275	268	267	267	274	280	281	276	271	264	260	264	272	279	283
38	277	272	270	262	261	262	268	274	276	270	265	258	254	258	266	273	277
39	271	266	264	256	255	256	262	268	270	264	259	252	248	252	260	267	271
40	266	261	258	250	249	250	256	262	264	258	253	246	242	246	254	261	266
41	260	255	252	244	243	244	250	256	258	253	247	240	236	240	248	256	260
42	254	249	246	238	237	238	244	251	253	247	241	234	230	234	242	250	254
43	248	243	240	232	231	232	238	245	247	241	235	228	224	228	236	244	248
44	242	237	234	226	225	226	232	239	241	235	229	222	218	222	230	238	242
45	236	231	228	220	219	220	226	233	235	229	223	216	212	216	223	232	236
46	230	225	221	214	213	214	220	227	229	223	217	210	206	210	217	226	230
47	224	219	215	208	207	208	214	221	223	217	211	204	200	204	211	220	224
48	218	213	209	202	201	202	208	215	217	211	205	198	194	199	205	214	218
49	212	207	203	196	196	196	202	209	211	205	199	192	188	193	199	208	212
50	206	201	197	190	189	190	196	203	205	199	193	186	182	187	193	202	206
51	201	195	191	184	183	184	190	197	199	193	187	180	177	181	187	196	201
52	194	189	185	178	178	178	184	191	193	187	181	174	171	175	181	190	194
53	188	183	179	172	172	172	178	185	187	181	175	168	165	169	175	184	188
54	182	177	173	166	166	166	172	179	181	175	169	163	159	163	169	178	182
55	176	171	167	161	160	161	166	173	175	169	163	157	154	157	163	172	176
56	170	165	161	155	154	155	161	167	168	163	157	151	148	151	158	166	170
57	164	159	155	149	148	149	155	161	162	156	151	145	142	146	152	160	164
58	158	154	149	143	143	143	149	154	156	151	145	139	136	140	146	154	158
59	152	148	143	137	137	137	143	148	150	144	140	133	131	134	140	148	152
60	146	142	137	132	131	132	137	142	144	138	134	127	125	129	134	142	146
61	140	136	132	126	126	126	131	136	138	132	128	122	119	123	128	136	140
62	134	130	126	120	120	120	125	131	132	126	122	116	114	117	123	131	134

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

63	128	125	120	115	115	115	119	124	126	121	116	111	108	112	117	125	128
64	122	119	115	110	109	110	114	119	120	115	110	105	103	106	112	118	122
65	116	113	109	104	104	104	108	113	114	109	105	100	97	100	106	113	116
66	111	108	103	99	98	99	102	107	108	104	99	94	92	95	100	107	111
67	104	102	98	93	93	93	97	101	103	98	93	88	87	89	94	101	104
68	99	96	92	88	87	88	91	95	97	92	88	83	81	84	89	95	99
69	93	91	87	82	82	83	85	90	91	87	82	78	76	78	83	89	93
70	87	85	81	77	77	77	80	84	85	81	77	72	71	73	78	84	87
71	81	79	76	72	72	72	74	78	80	76	71	67	66	68	72	78	81
72	76	74	70	67	66	67	69	73	74	70	66	62	60	62	67	72	76
73	70	69	65	62	61	62	64	67	68	65	61	57	56	57	62	67	70
74	64	63	60	57	56	57	59	62	63	60	56	52	50	52	57	61	64
75	59	58	54	52	52	52	54	56	57	54	50	47	46	48	51	56	59
76	53	52	49	48	47	47	49	51	52	49	46	43	41	43	46	51	53
77	48	47	44	43	42	42	44	46	47	44	41	38	36	38	41	45	48
78	43	42	39	38	37	38	39	41	41	39	36	33	32	33	37	40	43
79	37	37	35	34	33	33	35	36	36	34	31	29	28	29	32	35	37
80	32	32	30	29	29	29	30	31	32	30	27	25	24	25	28	31	32
81	28	28	26	25	25	25	26	27	27	25	23	21	20	21	23	26	28
82	23	24	22	21	21	21	22	23	22	21	19	17	17	17	19	22	23
83	19	19	19	18	17	18	18	18	18	17	15	13	13	14	16	18	19
84	15	15	15	14	14	14	14	15	14	13	11	10	10	11	12	14	15
85	11	12	11	11	11	11	11	11	10	9	8	7	8	8	9	10	11
86	8	8	8	8	8	8	7	7	7	6	5	5	5	5	6	7	8
87	4	5	5	5	5	5	4	4	3	3	2	2	2	3	3	4	4
88	2	3	3	3	3	2	2	1	1	1	0	0	0	0	1	2	2
89	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
92	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
93	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
94	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

95	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
96	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
97	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
101	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
102	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
103	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
104	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
106	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
107	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
108	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
109	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
111	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
112	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
113	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
114	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
115	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
116	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
117	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
118	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
119	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
121	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
122	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
123	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

Certificate #4703.03

127	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
129	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
131	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
132	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
133	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
134	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
136	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
137	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
138	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
141	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
142	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
143	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
144	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
146	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
147	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
148	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
149	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
151	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
154	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
156	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
157	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
158	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-E

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>

159	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

2.2.2 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD10-5CT(Mode:3000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-E1	120.0	60	0.0980	11.04	0.9383

Sphere-Spectroradiometer Method(Self-absorption:1.1053):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	95.0
R9	70
CCT (K)	3076
Duv	-0.0028
Total Luminous (lm)	990.3
Luminous Efficacy (lm/W)	89.70

Spectral Power Distribution and Chromaticity Diagram

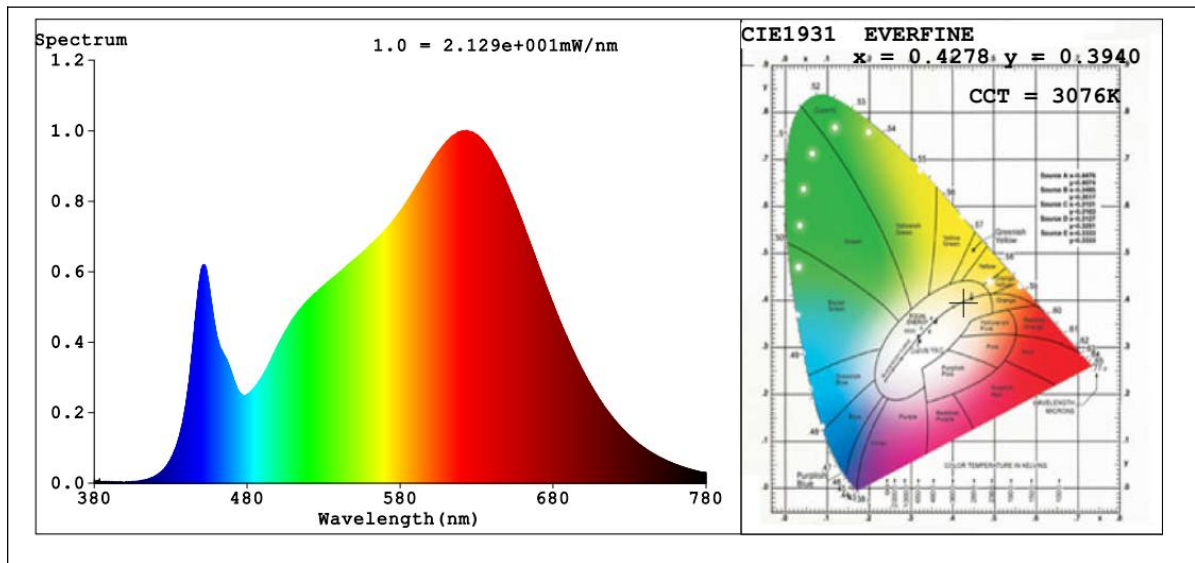

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4278, y=0.3940, u'=0.2490, v'=0.5160$ $Du, Dv: 0.0010, -0.0026$

$\text{CCT}=3076\text{K} (Duv=-0.0028)$ Dominant WL: $\lambda_d = 583.6\text{nm}$ Purity=46.6%

Peak WL: $\lambda_p = 623.5\text{nm}$ FWHM=164.8nm

Render Index: $R_a = 95.0$ Render Index: $\text{AvgR} = 93.0$

R1 =96 R2 =98 R3 =98 R4 =96 R5 =96 R6 =96 R7 =93

R8 =86 R9 =70 R10=95 R11=96 R12=84 R13=97 R14=99 R15=93

2.2.3 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD10-5CT(Mode:3500K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-E1	120.0	60	0.0978	11.02	0.9387

Sphere-Spectroradiometer Method(Self-absorption:1.1053):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	95.5
R9	77
CCT (K)	3564
Duv	-0.0036
Total Luminous (lm)	1016
Luminous Efficacy (lm/W)	92.20

Spectral Power Distribution and Chromaticity Diagram

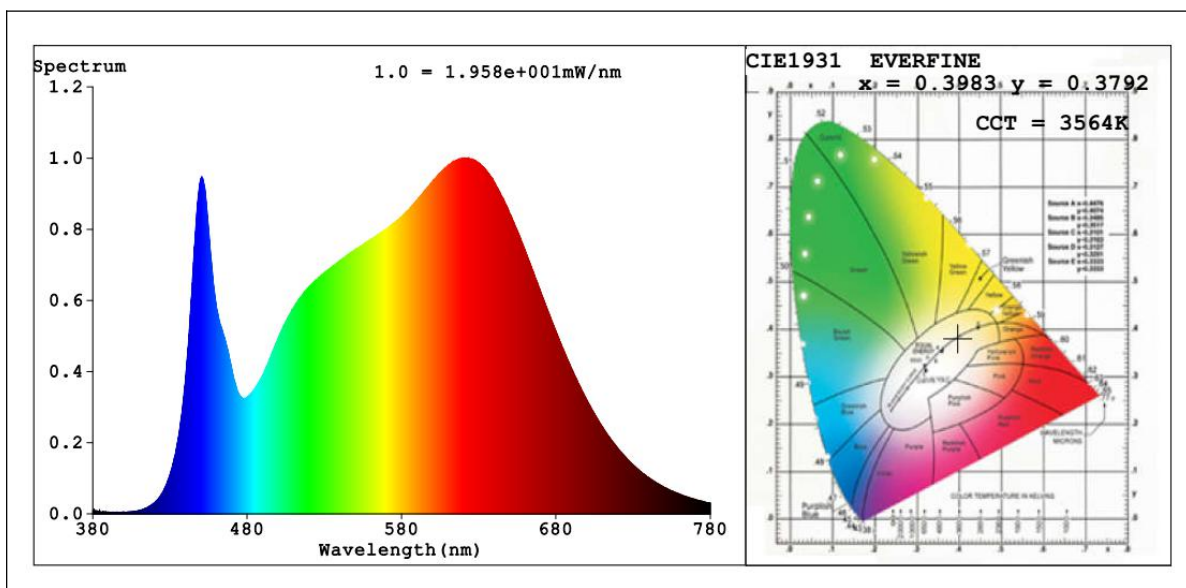

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3983$ $y=0.3792$ $u'=0.2359$ $v'=0.5053$ $Du, Dv: 0.0017, -0.0031$

CCT=3564K ($Duv=-0.0036$) Dominant WL:Ld =582.4nm Purity=33.3%

Peak WL:Lp=620.8nm FWHM=180.5nm

Render Index:Ra=95.5 Render Index:AvgR =93.4

R1 =97 R2 =98 R3 =97 R4 =96 R5 =96 R6 =95 R7 =95

R8 =90 R9 =77 R10=94 R11=96 R12=80 R13=98 R14=98 R15=95

2.2.4 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD10-5CT(Mode:4000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-E1	120.0	60	0.0978	11.01	0.9382

Sphere-Spectroradiometer Method(Self-absorption:1.1053):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.9
R9	79
CCT (K)	4170
Duv	-0.0026
Total Luminous (lm)	1041
Luminous Efficacy (lm/W)	94.55

Spectral Power Distribution and Chromaticity Diagram

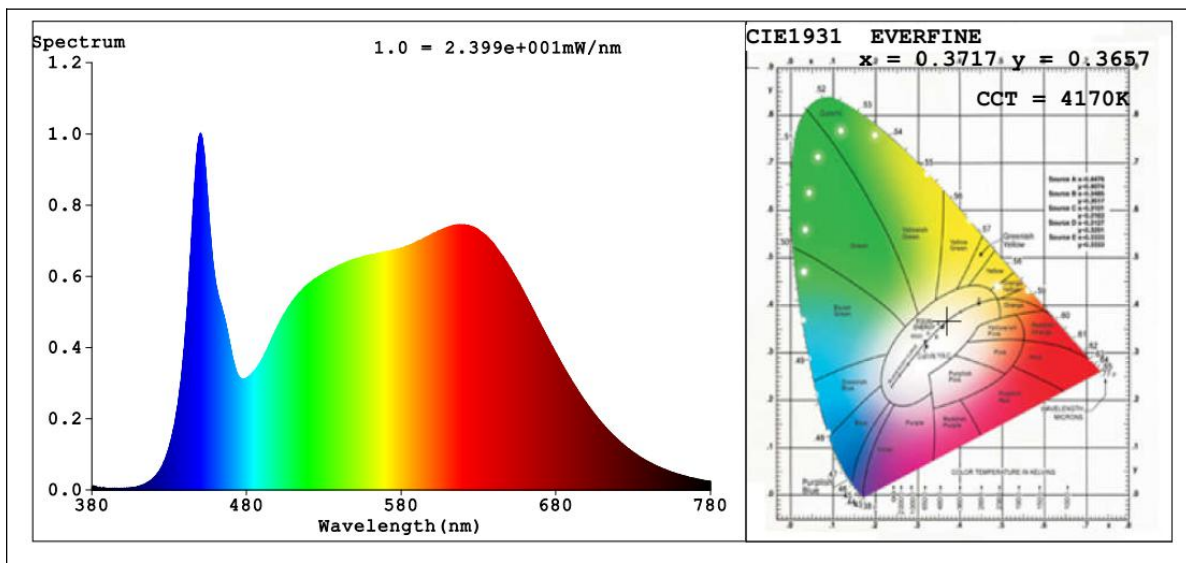

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3717$ $y=0.3657$ / $u'=0.2238$ $v'=0.4953$ $Du, Dv: 0.0016, -0.0021$

CCT=4170K ($Duv=-0.0026$) Dominant WL: $L_d = 580.2\text{nm}$ Purity=21.3%

Peak WL: $L_p = 450.2\text{nm}$ FWHM=23.2nm

Render Index: $R_a = 94.9$ Render Index: $\text{AvgR} = 92.5$

R1 =96 R2 =97 R3 =95 R4 =96 R5 =95 R6 =93 R7 =96

R8 =92 R9 =79 R10=91 R11=95 R12=74 R13=97 R14=97 R15=95

2.2.5 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD10-5CT(Mode:5000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-E1	120.0	60	0.0976	10.99	0.9382

Sphere-Spectroradiometer Method(Self-absorption:1.1053):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	92.7
R9	71
CCT (K)	5155
Duv	0.0007
Total Luminous (lm)	1066
Luminous Efficacy (lm/W)	97.00

Spectral Power Distribution and Chromaticity Diagram

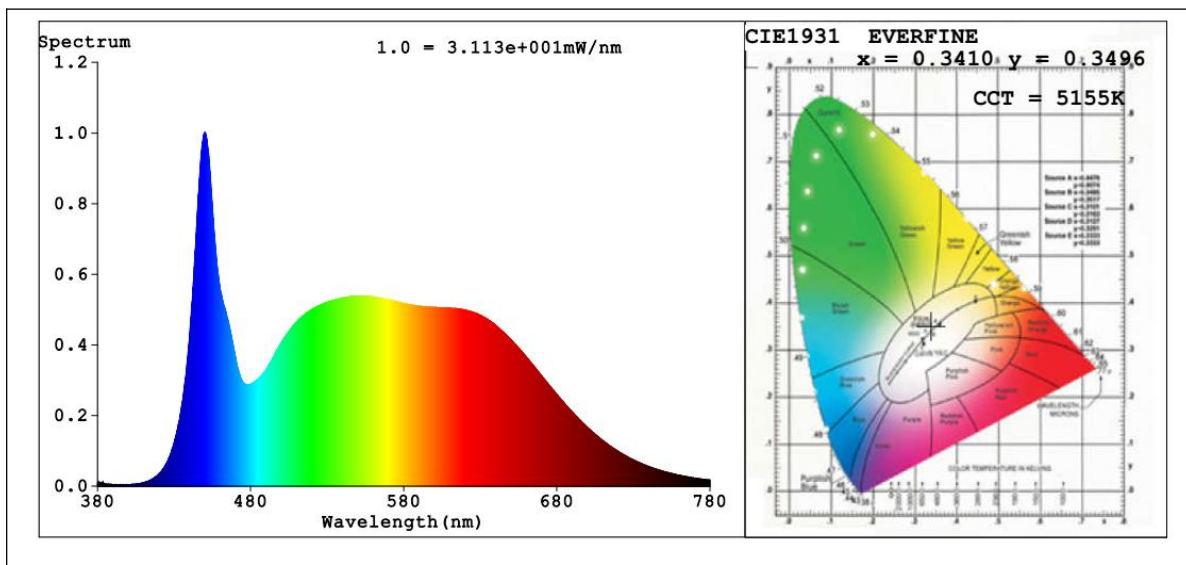

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3410, y=0.3496, u'=0.2094, v'=0.4831, Du, Dv: -0.0005, 0.0005$

$\text{CCT}=5155\text{K} (\text{Duv}=0.0007)$ Dominant WL: $\text{Ld} = 569.4\text{nm}$ Purity=7.2%

Peak WL: $\text{Lp}=450.1\text{nm}$ FWHM=22.0nm


Render Index: $\text{Ra}=92.7$ Render Index: $\text{AvgR} = 89.7$

R1 =93 R2 =94 R3 =93 R4 =94 R5 =93 R6 =90 R7 =95

R8 =90 R9 =71 R10=85 R11=93 R12=72 R13=94 R14=96 R15=93

2.3 Electrical and Photometric Measurements, with dimming	IES LM-79 2008 ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
Noted: The noise test and data are not covered by A2LA accreditation	

Test date	2021-04-08		Test Ambient:	25±1° C
Dimmer Technology			Forward phase-cut	
Sample No.			Maximum Level	Minimum Level
JCE210313-E1	Input:	Light outout(Lumen)	892.7	32.31
	120.0V / 60Hz	Percentage	91.80%	3.62%

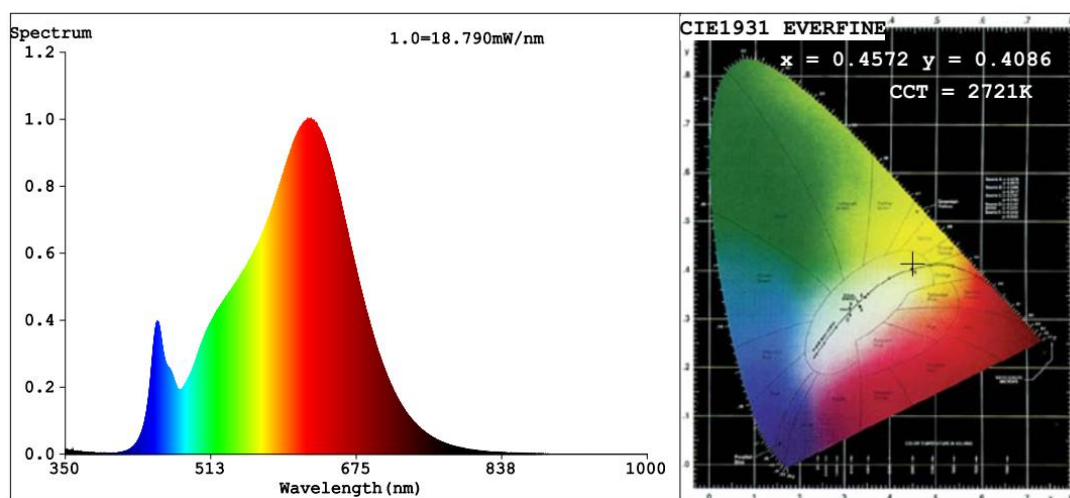

Color Parameters:

Chromaticity Coordinate: $x=0.4572$ $y=0.4086$ $u'=0.2617$ $v'=0.5262$

CCT=2721K (Duv=-0.0005) Dominant WL:Ld =584.3nm WL:Lc = --nm Purity=59.9%

Ratio:R=26.5% G=70.9% B=2.6% Peak WL:Lp=620.8nm FWHM=141.5nm

Render Index:Ra=93.5 AvgR=91.1 TM30:Rf=92 Rg=99

R1 =94 R2 =98 R3 =99 R4 =94 R5 =94 R6 =97 R7 =91
R8 =81 R9 =60 R10=94 R11=96 R12=85 R13=95 R14=99 R15=89

The luminaires [can] ~~lean not~~ provide less than 20% of total light output with continuous dimmer.

Dimmer	Peak Noise Reading (dBA)	Test Condition	Distance between the microphone and the UUT
LUTRON MACL-153M	14.8	Dimmer adjusted to lowest light output	< 1 m



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
Tel: (+86)755-2319 2554
Fax: (+86)755-2319 2815


2.4 Flicker	NEMA 77-2017 ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
--------------------	---

Dimming Technology	Forward phase-cut
Dimmer	LUTRON MACL-153M

Item	Short Term Flicker Indicator (Pst)	Stroboscopic Visibility Measure (SVM)
Maximum conduction	0.091	0.751
Intermediate conduction	0.184	1.121
Minimum conduction	1.157	0.416

2.5 Operating Frequency	ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
Noted: This test and data are not covered by A2LA accreditation	

Test date	2021-04-08	Test Ambient:	25±1° C
Sample No.	Operating Frequency (Hz)		
JCE210313-E1	120.001		

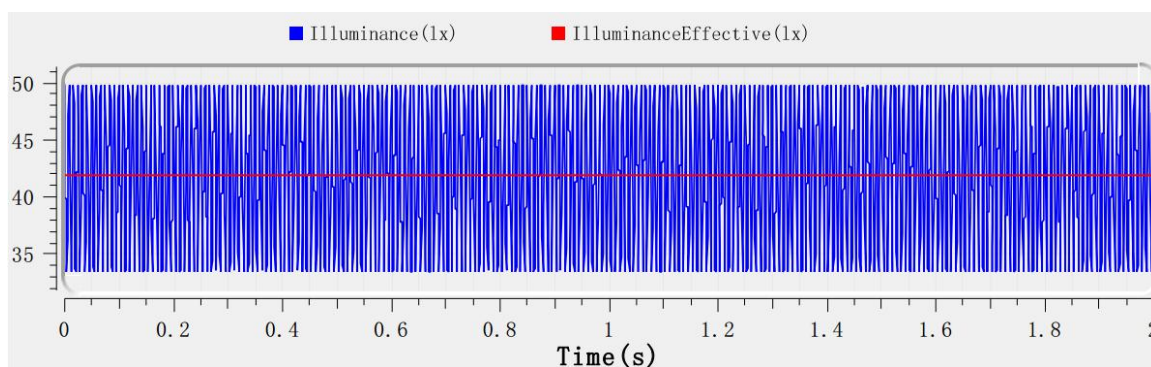


2.6 Starting Time

ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

Test date	2021-04-08	Test Ambient:	25±1° C
Sample No.	Start Time (ms)		
JCE210313-E1	54.0		

Graph (Start Time):

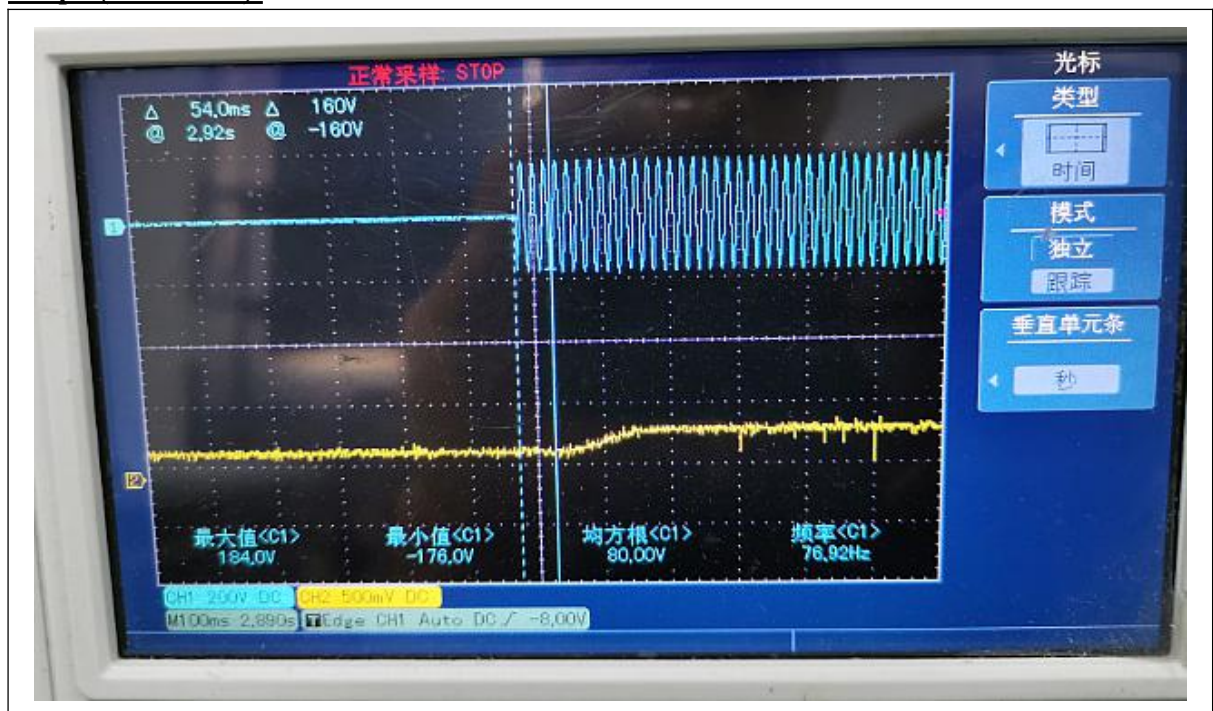



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
 Tel: (+86)755-2319 2554
 Fax: (+86)755-2319 2815

2.7 Transient Protection Test	ANSI/IEEE C62.41 ENERGY STAR® Program Requirements for Luminaires – Version 2.2
--------------------------------------	--


Test voltage: 120V,60Hz

Test date	2021-04-08	Test Ambient	25±1° C
Sample No.	Transient Protection Test - Seven Strikes		
JCE210313-E1	Survival		

2.8 In-Situ Temperature Measurement Test (ISTMT) | UL1598-2008, 3rd Edition

Test date	2021-04-08	Test Ambient	25±5° C
Input Vol./Frequency	120.0V / 60Hz	Output Current of Single LED(mA)	41.18
Sample No.	LED Package Model	Maximum Measured LED Ts Point Temperature (°C)	Maximum permitted Ts temperature for L70≥ 50,000 hrs (°C)
JCE210313-E1	67-21S Series	39.8	105


In-Situ Picture - Ts:

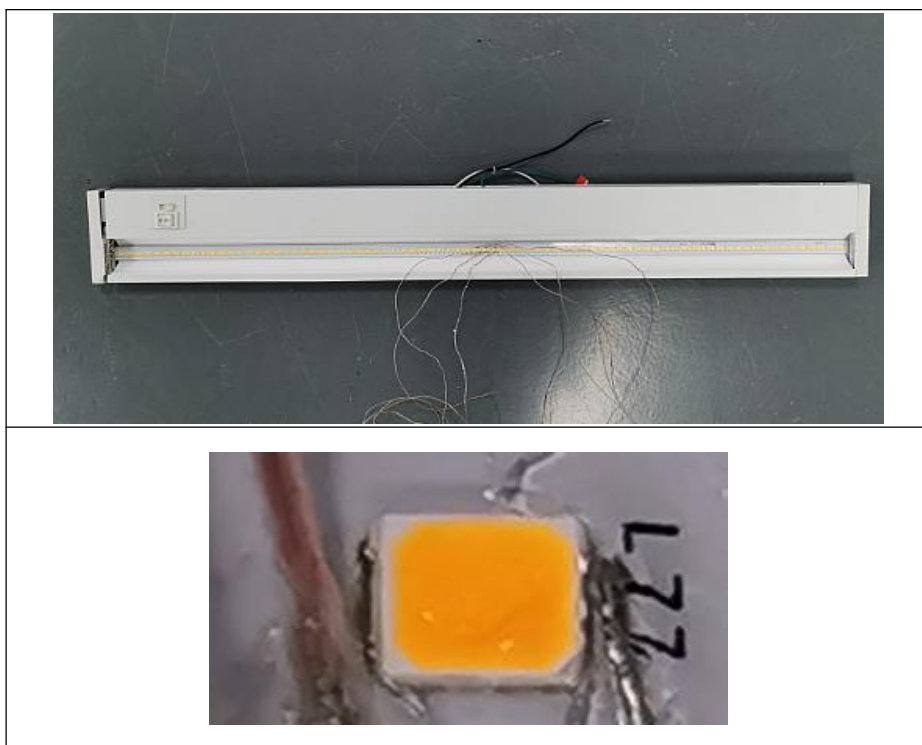

2.9 Maximum Measured Ballast or Driver Case Temperature	UL1598-2008, 3rd Edition
--	--

Test date	2021-04-08	Test Ambient	25±5° C
Sample No.	Maximum Measured Driver Case Temperature (°C)	Maximum Driver Case Temperature Limited (°C)	
JCE210313-E1	33.1	105	

In-Situ Picture - Ts:

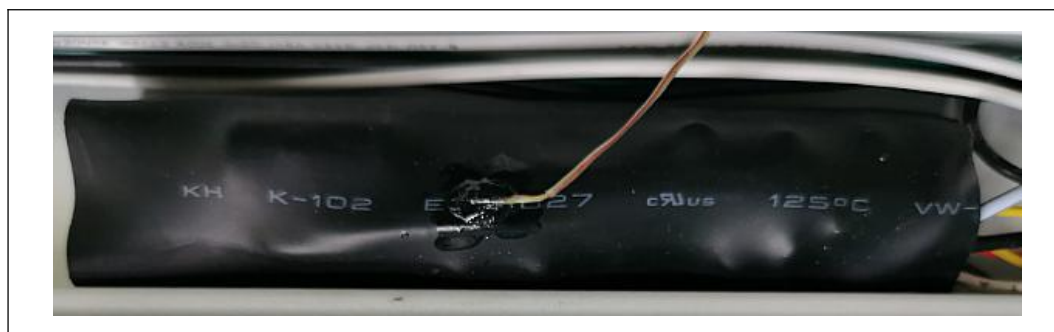

2.10 Standby Power Consumption:	ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
--	--

Test date	2021-04-08	Test Ambient:	25±1° C
Model Number	ULD10-5CT(Mode:2700K)	Stabilization Time (min)	60

Electrical Measurement – when the luminaires turned off:

Sample No.	Standby Power Consumption(W):
JCE210313-E1	0



3. Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-S-451	2 meter Integrating Sphere	Verified by D204 standard lamp	
ST-R-S-455	Spectral analysis system HAAS-1200	Verified by D204 standard lamp	
ST-R-S-452	Standard Lamp D204	2021-04-15	2022-04-14
ST-R-S-453	Power Meter for Integrating Sphere	2021-04-08	2022-04-06
ST-R-S-407	Goniophotometer system	Verified by S1530039 standard lamp	
ST-R-S-410	Standard Lamp S1530039	2021-04-15	2022-04-14
ST-R-S-408	Power Meter for Goniophotometer	2021-04-08	2022-04-06
ST-R-S-027	Digital Luxmeter	2021-04-08	2022-04-07
ST-R-S-016	Oscillograph	2021-04-08	2022-04-06
ST-R-S-017	Probe	2021-04-08	2022-04-07
ST-R-361	ZLB61012X	2020-08-19	2021-08-20
ST-R-414	LFA-3000	2020-12-18	2021-12-17
Uncertainty: Photometric Measurement (Sphere):2.72%, k=2 Chromaticity Measurement(Sphere):43.60K, k=2 Photometric Measurement(Goniophotometer): 3.44%, k=2			

***** END OF DATASHEET PACKAGE *****