



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

Energy Star Test Report

For

L-TECH CORPORATION

(Brand Name:N/A)

Shaogangtou District, Qiaotou Town, Dongguan City

Model name(s):
ULD11-5CT

Report Type: Testing and Report According to ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

Type of Luminaire: Inseparable Other SSL Luminaire

Report Date: 2021-04-20

Test & Report By:

Garman Mo

Engineer: Garman Mo

Review By:

Johnson Sun

Manager: Johnson Sun

- Note: 1.The results contained in this report pertain only to the tested samples.
2.This report does not imply product certification, approval, or endorsement by A2LA or any agency of the Federal Government.
3.This report contains data that are not covered by the A2LA accreditation.

Project No.:JCE210313 Report No.:JCE210313-F

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107


Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

1.1 Product Information:		
Model Number	ULD11-5CT	
Remark	According to the test data, 2700K is the most consumptive mode.	
Representative (Tested) Model	ULD11-5CT(Mode:2700K) ULD11-5CT(Mode:3000K) ULD11-5CT(Mode:3500K) ULD11-5CT(Mode:4000K) ULD11-5CT(Mode:5000K)	
Model Difference	N/A	
SKU (if available)	N/A	
Type of Luminaire (for integral lamps, list base type and lamp type)	Inseparable Other SSL Luminaire	
LED Manufacturer	EVERLIGHT ELECTRONICS CO., LTD	
LED Model	67-21S Series	
Dimming	10%-100%	
Sample Number	JCE210313-F1	
Date of Receipt	2021-04-05	
Luminaire Aperture (for Downlight retrofits)	--	in.
Luminaire Length	--	mm
Luminaires Width	--	mm
Number of Units (modular products)	N/A	s

1.2 Rated Values:	
Rated Voltage / Frequency	120V,50/60Hz
Nominal Power	16W
Rated Initial Lamp Lumen	--
Declared CCT	2700K,3000K,3500K,4000K,5000K

1.3 Product Photos

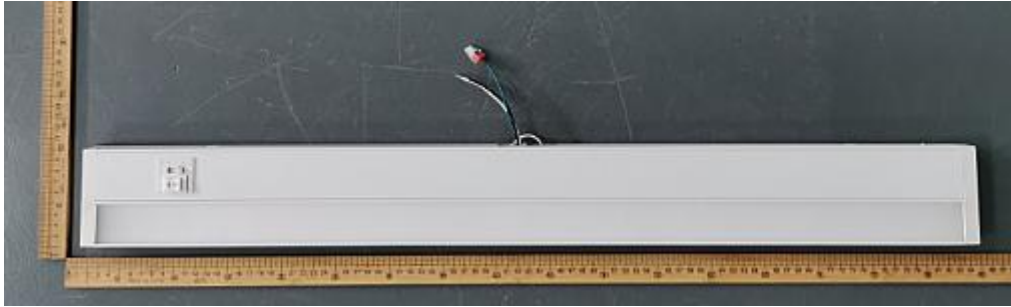

1.4 Test Specifications:

Test item	<ol style="list-style-type: none"> 1. Total Luminous Flux 2. Luminous Distribution Intensity 3. Luminous Efficacy 4. Correlated Color Temperature 5. Color Rendering Index 6. Chromaticity Coordinate 7. Electrical Parameters 8. Color Angular Uniformity 9. Dimming 10. Flicker 11. Operating Frequency 12. Starting Time 13. Transient Protection Test 14. In-Situ Temperature Measurement Test 15. Standby Power Consumption
Reference Standard	<ol style="list-style-type: none"> 1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products 2. ANSI C78.377-2015 Specifications for the Chromaticity of Solid State Lighting Products 3. C82.77-10:2014 American National Standard for Lighting Equipment-Harmonic Emission Limits-Related Power Quality Requirements 4. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources 5. CIE 15-2004 Technical Report Colorimetry 6. UL1993 4th Edition, Self-Ballasted Lamps and Lamp Adapters 7. ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) – Version 2.2 8. ANSI/IEEE C62.41.2:2002 IEEE Recommended Practice on Characterization of Surges in Low-Voltage(1000V and Less) AC Power Circuits 9. IEC 62301:2011 Household electrical appliances - Measurement of standby power 10. NEMA 77-2017 Standard for Temporal Light Artifacts: Test Methods and Guidance for Acceptance Criteria
Remark	<p>Below test and data are not covered by A2LA accreditation:</p> <ul style="list-style-type: none"> - Operating Frequency - Noise

1.5 Test Methods

1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1° vertical intervals and 22.5° horizontal intervals.



2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

2.1 Summary of Test Result

Criteria Item	The Type of Luminaires	Requirement (ES for Luminaires V2.2)	Measured Value	Status
Input Wattage	All	\leq Rated Wattage	13.40W	Pass
Luminous Efficacy	Inseparable Other SSL Luminaire	≥ 70 lm/W	80.98lm/W	Pass
Luminaire Minimum Light Output	Inseparable Other SSL Luminaire	≥ 200 lumens	1085.1lm	Pass
Correlated Color Temperature (CCT)	Inseparable Other SSL Luminaire	Shall be capable of providing at least one of the following nominal correlated color temperatures (CCTs): • 2700 Kelvin • 3000 Kelvin • 3500 Kelvin • 4000 Kelvin • 5000 Kelvin	2722K Duv=-0.0011	Pass
Color Rendering Index (CRI)	Inseparable Other SSL Luminaire	$R_a \geq 80$ $R_9 > 0$	$R_a = 92.9$ $R_9 = 65$	Pass
Lumen Maintenance	Solid State Option 1:	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Light Source Life	Solid State	L70 lumen maintenance: $\geq 25,000$ hours for indoor $\geq 35,000$ hours for outdoor $\geq 50,000$ hours for inseparable luminaires		Pass
Color Maintenance	Inseparable Other SSL Luminaire	$\Delta u'v' \leq 0.007$	Max. 0.00687 in LM-80 report*	Pass
Source Start Time	Inseparable Other SSL Luminaire	< 750 ms	66ms	Pass

Power Factor	Solid State	Total luminaire input power ≤ 5 watts: PF ≥ 0.5 Total luminaire input power > 5 watts: PF ≥ 0.7	0.9662	Pass
Transient Protection	Solid State	The line transient shall consist of seven strikes of a 100 kHz ring wave, 2.5 kV level, for both common mode and differential mode.	Survival	Pass
Standby Power Consumption	All Luminaires	Luminaires shall not draw power in the off state.	0 W	Pass
Operating Frequency	Solid State	Frequency ≥ 120 Hz	120.002Hz	Pass
Maximum Measured Driver Case Temperature	Solid State	shall not exceed the driver manufacturer's maximum recommended temperature during in situ operation. ≤ 105 °C	33.0°C	Pass
Maximum In-Situ Source Temperature	Solid State	Maximum permitted Ts temperature for L70 \geq 50,000 hrs ≤ 105 °C	36.2°C	Pass
Dimming	Solid State	The luminaire and its components shall provide continuous dimming from 100% to 20% of total light output. Luminaire shall not emit noise above 24dBA at 1 meter or less at the minimum output.	Validated	Pass
CCT	Solid State	Packaging shall clearly describe the nominal color designation in units of Kelvin (e.g. 2700K, 3000K).	2700K,3000K, 3500K,4000K, 5000K	Pass

Note: The information or data with an “*” are provided by the manufacturer.

Our laboratory has no responsibility for the decision of compliance with specification that based on the data or information with the “*”.

2.2.1 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD11-5CT(Mode:2700K)	Total Operating Time (min)	75

Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-F1	120.0	60	0.1155	13.40	0.9662


Sphere-Spectroradiometer Method(Self-absorption:1.1081):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	92.9
R9	65
CCT (K)	2722
Duv	-0.0011

Goniophotometer Method(Test Distance:26.000m):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Total Luminous (lm)	1085.1
Luminous Efficacy (lm/W)	80.98
Beam Angle°	98.9
Center Beam Candle Power (cd)	446

Spectral Power Distribution and Chromaticity Diagram

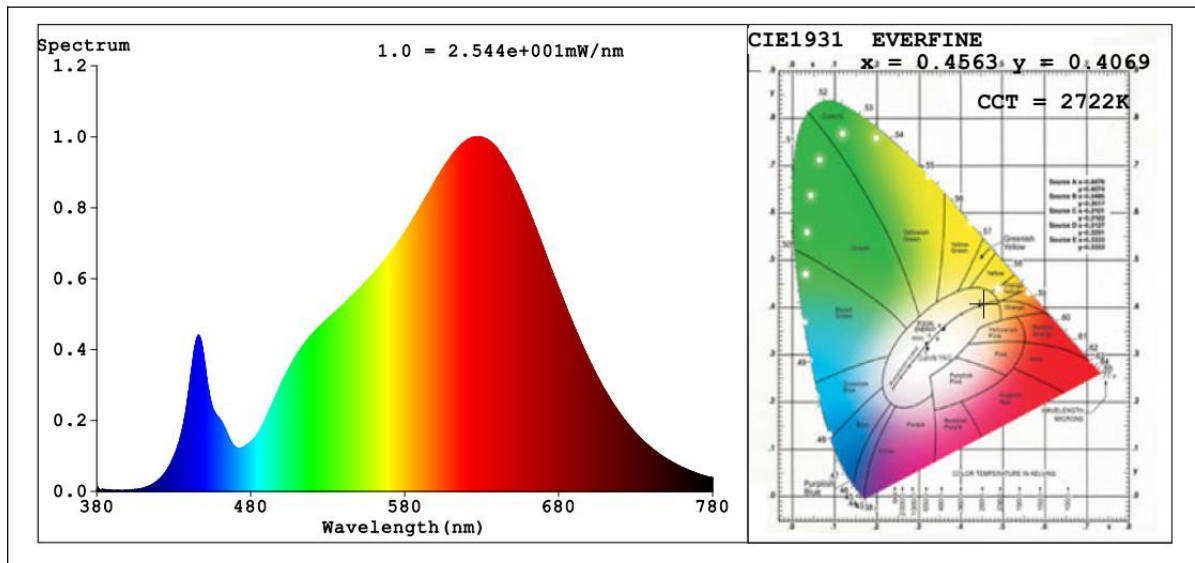

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4563$ $y=0.4069$ $u'=0.2618$ $v'=0.5254$ $Du, Dv: 0.0003, -0.0010$

$\text{CCT}=2722\text{K}$ ($Duv=-0.0011$) Dominant WL:Ld =584.5nm Purity=59.1%


Peak WL:Lp=627.4nm FWHM=153.4nm

Render Index: $R_a=92.9$ Render Index: AvgR =90.6

R1 =94 R2 =95 R3 =96 R4 =94 R5 =93 R6 =95 R7 =93

R8 =84 R9 =65 R10=88 R11=95 R12=86 R13=94 R14=97 R15=90

Zonal Lumen Tabulation

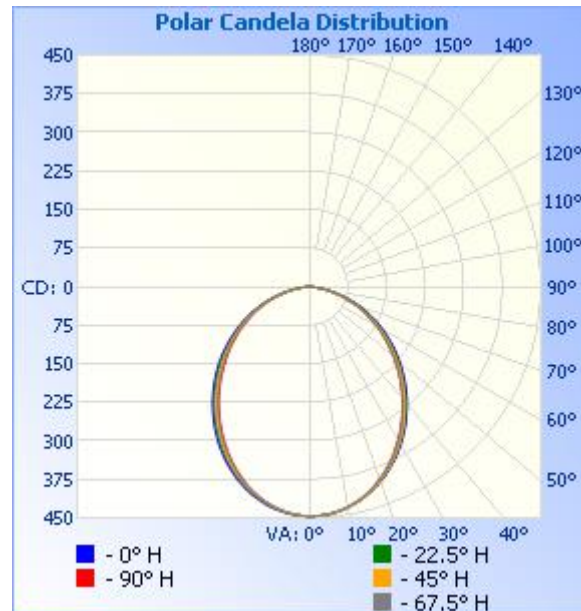

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	332.0	30.6%
0-40	529.4	48.8%
0-60	890.2	82%
60-90	194.8	18%
70-100	74.6	6.9%
90-120	0	0%
0-90	1,085.0	100%
90-180	0.0	0%
0-180	1,085.0	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	42.0	3.9%	90-100	0	0%
10-20	117.9	10.9%	100-110	0	0%
20-30	172.1	15.9%	110-120	0	0%
30-40	197.5	18.2%	120-130	0	0%
40-50	194.2	17.9%	130-140	0	0%
50-60	166.5	15.3%	140-150	0	0%
60-70	120.2	11.1%	150-160	0	0%
70-80	62.6	5.8%	160-170	0	0%
80-90	12.1	1.1%	170-180	0.0	0%



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
Tel: (+86)755-2319 2554
Fax: (+86)755-2319 2815

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446
1	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446	446
2	446	446	446	446	446	446	446	446	446	445	445	445	445	445	445	446	446
3	446	446	446	445	446	445	446	445	445	445	444	445	444	445	445	445	446
4	445	445	445	445	445	445	445	444	444	444	443	443	443	443	444	444	445
5	444	444	444	444	444	444	444	443	443	442	442	442	442	442	443	443	444
6	443	443	443	442	443	442	442	442	442	441	440	440	440	440	441	442	443
7	441	441	442	441	441	441	441	440	440	439	439	438	438	438	440	441	441
8	440	439	440	439	439	439	439	439	438	437	436	436	436	436	438	439	440
9	438	437	438	437	437	437	437	437	436	435	434	434	433	434	436	437	438
10	436	435	436	435	435	434	435	434	434	432	432	431	431	432	434	434	436
11	434	433	434	432	432	432	432	432	432	430	429	428	428	429	431	432	434
12	431	430	431	429	429	429	430	429	429	427	426	425	424	426	428	429	431
13	428	428	428	426	426	426	427	426	427	424	423	422	421	422	425	426	428
14	425	424	425	423	423	422	423	423	424	421	420	418	417	419	422	423	425
15	422	422	422	420	420	419	420	420	420	418	416	415	413	415	418	420	422
16	419	418	418	416	416	415	417	416	417	414	412	411	409	411	415	417	419
17	415	414	415	412	412	411	413	412	414	410	408	406	405	407	411	413	415
18	412	411	411	408	408	407	409	408	409	406	404	402	400	402	407	409	412
19	408	406	406	403	403	402	405	404	406	402	400	397	396	398	402	405	408
20	404	402	402	399	399	398	400	400	401	397	395	393	391	393	398	401	404
21	400	398	398	394	394	393	396	396	397	393	391	388	386	388	393	396	400
22	395	393	393	389	389	388	391	392	392	388	386	383	381	383	389	392	395
23	391	389	388	384	384	383	386	387	388	384	381	377	376	378	384	387	391
24	386	384	383	379	379	378	381	382	383	379	376	372	370	373	379	382	386
25	381	379	378	374	374	373	377	377	378	374	371	367	365	367	374	377	381
26	377	374	373	369	368	367	371	372	373	368	365	361	359	361	368	372	377
27	371	368	368	363	363	361	366	367	368	363	360	355	353	356	363	367	371
28	366	363	363	357	357	355	360	361	362	357	354	349	347	350	357	362	366
29	361	357	357	352	351	350	354	356	357	352	348	344	341	344	352	356	361

Project No.:JCE210313 Report No.:JCE210313-F

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
Tel: (+86)755-2319 2554
Fax: (+86)755-2319 2815

30	355	352	351	346	345	344	348	350	351	346	342	338	335	338	346	351	355
31	350	346	345	340	339	337	342	344	346	340	337	331	329	332	340	345	350
32	344	340	340	334	333	332	336	338	340	334	331	325	323	327	334	339	344
33	338	334	334	328	326	325	330	332	334	328	325	319	317	320	328	334	338
34	332	328	328	321	320	319	324	326	328	322	319	313	310	314	322	328	332
35	326	322	322	315	314	312	317	320	322	316	312	306	304	308	316	322	326
36	320	316	315	308	307	306	311	314	316	310	306	300	298	302	310	315	320
37	314	310	309	302	301	299	304	308	310	304	300	294	292	295	303	309	314
38	308	304	302	295	295	293	298	302	304	297	294	287	285	289	297	303	308
39	301	297	296	289	288	287	292	296	297	291	288	281	279	283	290	296	301
40	295	291	289	282	281	280	285	289	291	285	281	275	272	276	284	290	295
41	289	285	283	276	275	274	279	283	285	279	275	268	266	270	277	284	289
42	283	278	276	269	268	267	272	277	279	273	268	262	259	263	271	278	283
43	276	272	269	263	261	261	265	270	272	266	262	256	253	257	264	271	276
44	270	265	263	256	255	254	259	264	266	260	255	249	246	250	258	265	270
45	263	258	256	249	248	247	252	257	259	254	249	243	239	244	251	258	263
46	257	252	249	242	242	241	246	251	253	247	242	236	233	237	244	252	257
47	250	245	242	236	235	234	239	244	246	241	236	230	226	231	238	245	250
48	243	239	236	229	228	228	233	238	240	234	230	224	220	224	231	239	243
49	237	232	229	223	222	221	226	231	233	228	223	217	214	218	225	232	237
50	230	225	222	216	215	214	219	225	227	221	217	211	207	211	218	226	230
51	223	218	215	209	208	208	213	218	220	215	210	204	201	205	211	219	223
52	217	212	209	203	202	201	206	211	213	208	204	198	195	199	205	213	217
53	210	205	202	196	195	195	200	205	207	201	198	192	189	192	198	206	210
54	204	198	195	189	189	188	193	198	200	195	191	185	182	186	192	200	204
55	197	192	189	183	182	182	186	192	194	188	185	179	176	180	185	193	197
56	190	185	182	176	176	175	180	185	187	182	178	172	170	173	179	187	190
57	184	179	175	169	169	168	173	178	180	175	172	166	164	167	173	180	184
58	177	172	168	162	163	162	167	171	173	168	165	160	157	161	166	173	177
59	170	165	162	156	156	156	160	165	167	162	159	153	151	155	160	167	170
60	164	159	155	149	150	149	153	158	160	155	152	147	145	148	153	160	164
61	157	152	148	143	143	143	147	151	153	149	146	141	139	142	147	154	157



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

62	150	146	142	137	137	136	140	145	146	142	139	135	133	136	140	147	150
63	144	140	135	130	130	130	134	138	140	136	133	128	126	129	134	141	144
64	137	133	129	124	124	123	127	131	133	129	126	122	120	123	128	134	137
65	131	127	122	118	117	117	120	125	127	123	120	116	114	117	121	128	131
66	124	120	116	112	111	111	114	118	120	116	114	110	108	111	115	121	124
67	117	114	110	106	105	105	108	112	114	110	107	104	102	105	109	115	117
68	111	108	103	99	98	98	101	105	107	104	101	97	96	98	103	108	111
69	104	101	97	93	92	92	95	99	101	97	95	91	90	92	96	101	104
70	97	94	90	87	86	86	88	92	94	91	88	85	84	86	90	95	97
71	91	88	84	80	80	80	82	86	88	85	82	79	78	80	84	89	91
72	84	82	77	74	74	74	76	79	81	79	76	73	72	74	78	82	84
73	77	75	71	68	68	68	70	73	75	73	70	67	66	68	72	75	77
74	71	69	65	62	62	62	64	67	69	67	64	62	61	62	66	69	71
75	64	62	59	57	56	56	58	60	62	60	58	56	55	57	60	63	64
76	58	56	53	51	50	50	52	54	56	55	52	50	49	51	54	57	58
77	52	50	47	45	44	45	46	48	50	49	47	45	44	45	48	50	52
78	46	44	41	40	39	39	40	43	44	43	41	39	38	40	42	44	46
79	40	38	36	34	34	34	35	37	38	37	36	34	33	34	37	39	40
80	34	33	31	29	29	29	30	31	32	32	30	29	29	30	31	33	34
81	28	27	26	24	24	24	25	26	27	27	25	25	24	25	26	28	28
82	23	23	21	20	20	20	20	21	22	22	21	20	20	21	22	23	23
83	18	18	17	16	15	15	16	16	17	17	16	16	16	16	17	18	18
84	14	13	13	12	12	12	12	12	12	13	12	12	13	13	13	14	14
85	10	9	9	9	9	8	8	8	8	9	9	9	10	10	10	10	10
86	6	6	6	6	6	6	5	5	5	5	6	7	7	7	7	7	6
87	3	4	4	4	4	3	3	2	2	3	4	4	5	5	4	4	3
88	1	2	2	1	1	1	1	0	0	1	1	2	2	2	2	2	1
89	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
90	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
91	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
92	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
93	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Project No.:JCE210313 Report No.:JCE210313-F

Report Format Number STP-QP019-103-A/1

<http://www.new-standard-test.com/>



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xihu Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

94	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
95	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
96	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
97	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
98	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
99	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
100	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
101	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
102	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
103	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
104	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
105	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
106	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
107	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
108	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
109	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
110	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
111	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
112	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
113	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
114	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
115	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
116	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
117	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
118	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
119	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
120	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
121	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
122	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
123	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107

Tel: (+86)755-2319 2554

Fax: (+86)755-2319 2815

126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
127	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
129	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
131	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
132	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
133	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
134	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
136	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
137	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
138	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
141	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
142	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
143	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
144	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
146	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
147	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
148	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
149	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
151	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
154	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
156	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
157	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

158	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
159	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
177	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
178	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

2.2.2 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD11-5CT(Mode:3000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-F1	120.0	60	0.1164	13.32	0.9537

Sphere-Spectroradiometer Method(Self-absorption:1.1081):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.0
R9	73
CCT (K)	3035
Duv	-0.0029
Total Luminous (lm)	1108
Luminous Efficacy (lm/W)	83.18

Spectral Power Distribution and Chromaticity Diagram

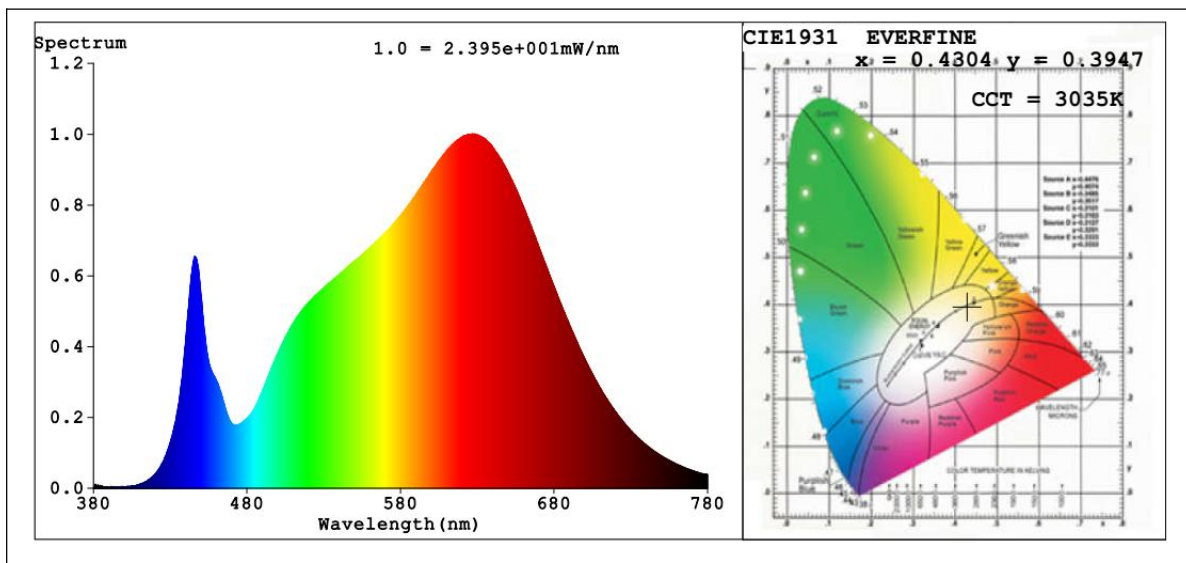

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4304, y=0.3947/u'=0.2504, v'=0.5166$ $Du, Dv: 0.0011, -0.0027$

$\text{CCT}=3035\text{K} (Duv=-0.0029)$ Dominant WL: $\lambda_d = 583.8\text{nm}$ Purity=47.6%

Peak WL: $\lambda_p = 628.2\text{nm}$ FWHM=171.0nm

Render Index: $R_a = 94.0$ Render Index: AvgR = 92.1

R1 = 96 R2 = 96 R3 = 95 R4 = 94 R5 = 95 R6 = 95 R7 = 93

R8 = 88 R9 = 73 R10 = 90 R11 = 95 R12 = 87 R13 = 96 R14 = 96 R15 = 93

2.2.3 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD11-5CT(Mode:3500K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-F1	120.0	60	0.1162	13.30	0.9539

Sphere-Spectroradiometer Method(Self-absorption:1.1081):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.6
R9	80
CCT (K)	3493
Duv	-0.0036
Total Luminous (lm)	1141
Luminous Efficacy (lm/W)	85.79

Spectral Power Distribution and Chromaticity Diagram

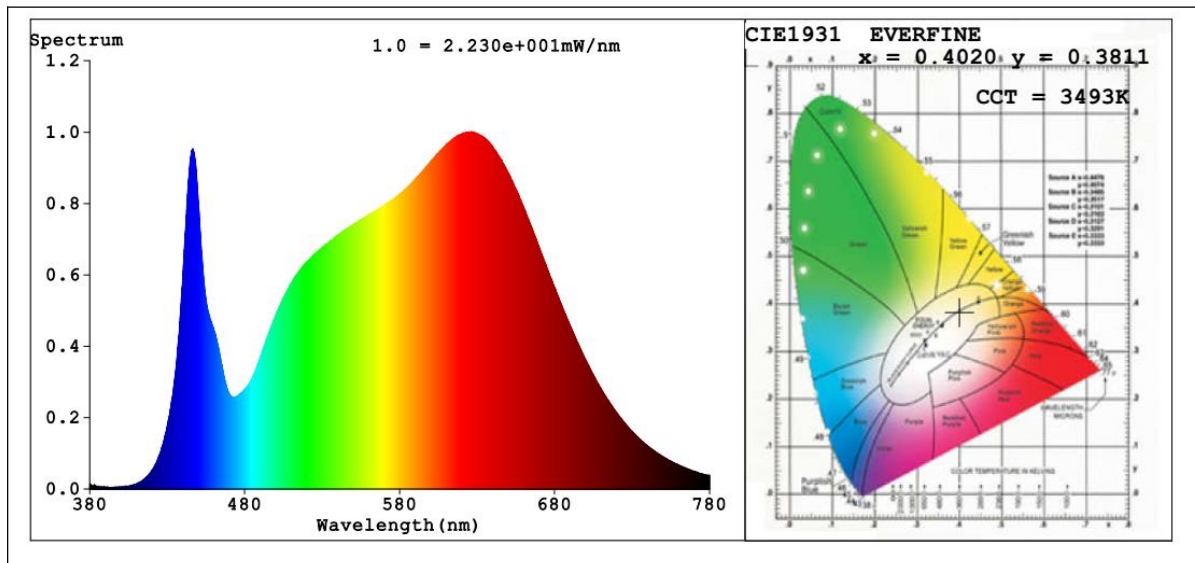

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.4020$ $y=0.3811$ / $u'=0.2376$ $v'=0.5067$ $Du, Dv: 0.0017, -0.0031$

CCT=3493K ($Duv=-0.0036$) Dominant WL:Ld =582.6nm Purity=35.0%

Peak WL:Lp=626.2nm FWHM=184.6nm

Render Index:Ra=94.6 Render Index:AvgR =92.9

R1 =97 R2 =96 R3 =94 R4 =94 R5 =96 R6 =94 R7 =94

R8 =92 R9 =80 R10=90 R11=94 R12=84 R13=97 R14=96 R15=96

2.2.4 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD11-5CT(Mode:4000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-F1	120.0	60	0.1162	13.30	0.9538

Sphere-Spectroradiometer Method(Self-absorption:1.1081):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	94.5
R9	82
CCT (K)	4071
Duv	-0.0027
Total Luminous (lm)	1174
Luminous Efficacy (lm/W)	88.27

Spectral Power Distribution and Chromaticity Diagram

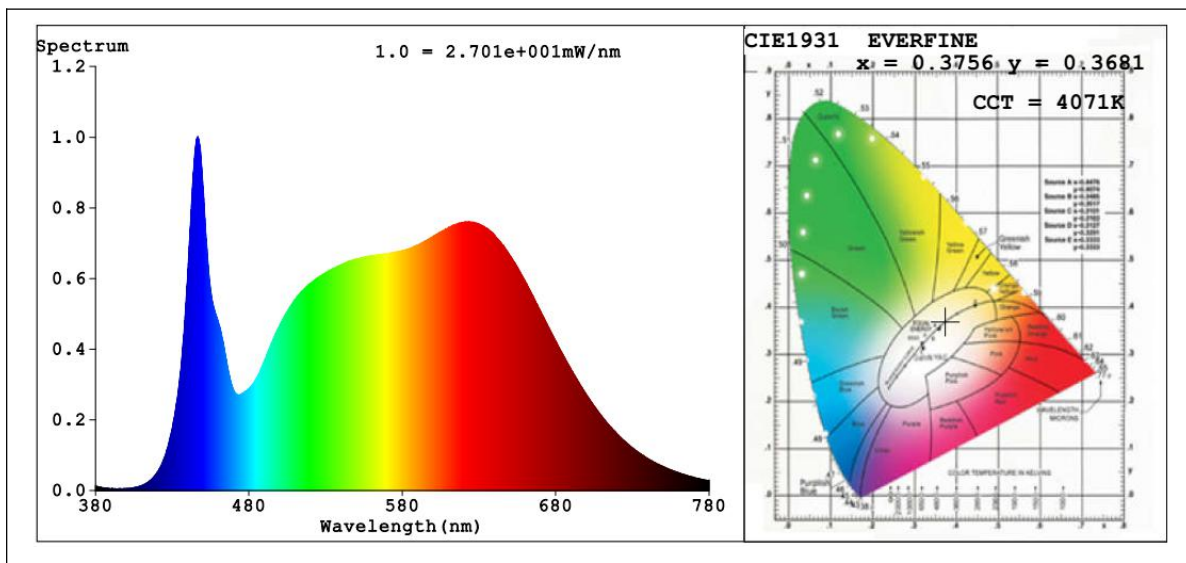

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3756$ $y=0.3681$ $u'=0.2254$ $v'=0.4970$ $Du, Dv: 0.0015, -0.0022$

$\text{CCT}=4071\text{K}$ ($Duv=-0.0027$) Dominant WL: $\text{Ld} = 580.5\text{nm}$ Purity=23.2%

Peak WL: $\text{Lp}=446.6\text{nm}$ FWHM=19.9nm

Render Index: $\text{Ra}=94.5$ Render Index: $\text{AvgR} = 92.5$

R1 =97 R2 =95 R3 =93 R4 =94 R5 =96 R6 =93 R7 =95

R8 =93 R9 =82 R10=88 R11=94 R12=79 R13=96 R14=95 R15=96

2.2.5 Electrical, Photometric and Chromaticity Measurements	IES LM-79 2008
--	-----------------------

Test date	2021-04-08	Test Ambient:	25 ± 1° C
Test Orientation	As intended	Stabilization Time (min)	60
Model Number	ULD11-5CT(Mode:5000K)	Total Operating Time (min)	61


Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
JCE210313-F1	120.0	60	0.1175	13.43	0.9526

Sphere-Spectroradiometer Method(Self-absorption:1.1081):

Parameter	Result
Test Voltage (V)	120.0
Frequency (Hz)	60
Color Rendering Index (CRI)	92.4
R9	75
CCT (K)	5013
Duv	0.0010
Total Luminous (lm)	1229
Luminous Efficacy (lm/W)	91.51

Spectral Power Distribution and Chromaticity Diagram

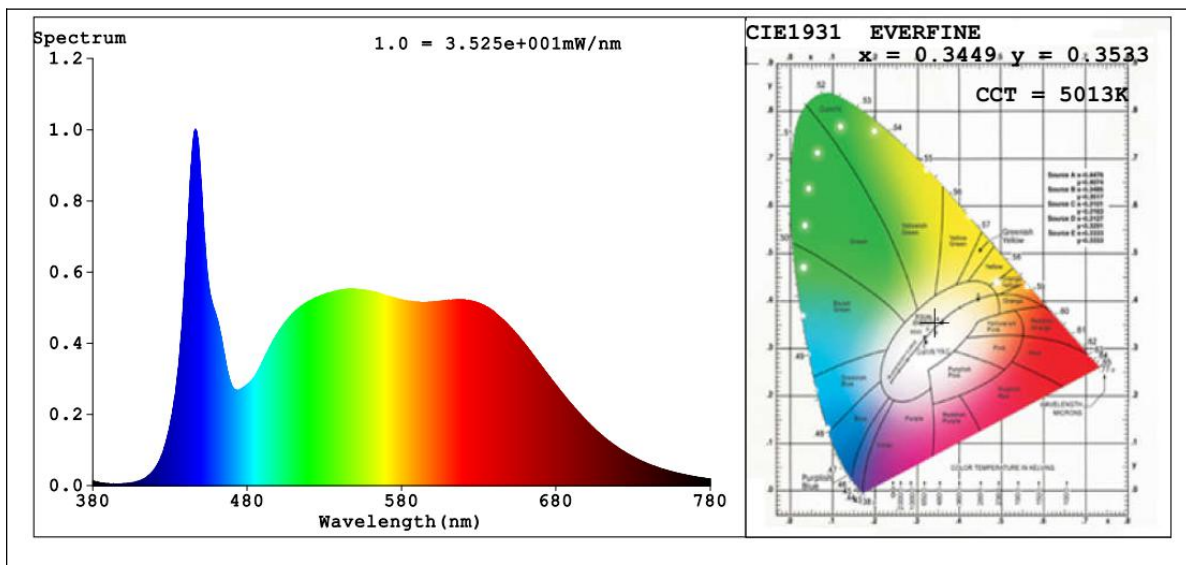

Colorimetric Parameters

Colorimetric Parameters

Chromaticity Coordinate: $x=0.3449, y=0.3533, u'=0.2106, v'=0.4855$ $Du, Dv: -0.0007, 0.0007$

$\text{CCT}=5013\text{K} (Duv=0.0010)$ Dominant WL: $\text{Ld} = 571.5\text{nm}$ Purity=9.5%

Peak WL: $\text{Lp} = 446.6\text{nm}$ FWHM=19.7nm

Render Index: $\text{Ra} = 92.4$ Render Index: $\text{AvgR} = 89.9$

R1 =94 R2 =93 R3 =91 R4 =93 R5 =94 R6 =90 R7 =93


R8 =91 R9 =75 R10=83 R11=93 R12=77 R13=93 R14=95 R15=93

2.3 Electrical and Photometric Measurements, with dimming

IES LM-79 2008 ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

Noted: The noise test and data are not covered by A2LA accreditation

Test date	2021-04-08		Test Ambient:	25±1° C
Dimmer Technology			Forward phase-cut	
Sample No.			Maximum Level	Minimum Level
JCE210313-F1	Input:	Light outout(Lumen)	992.0	47.39
	120.0V / 60Hz	Percentage	91.42%	4.78%

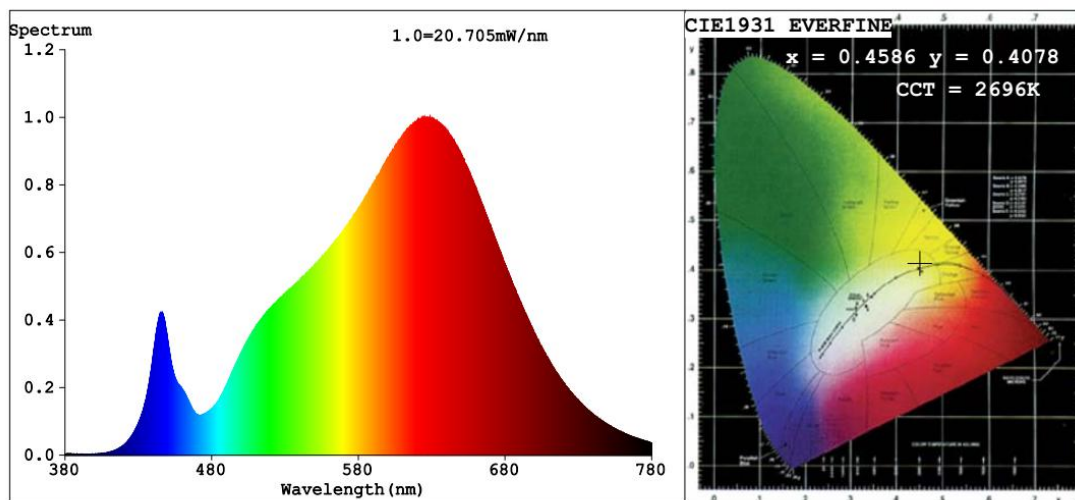

Color Parameters:

Chromaticity Coordinate: $x=0.4586$ $y=0.4078$ $u'=0.2630$ $v'=0.5261$
 CCT=2696K (Duv=-0.0009) Dominant WL:Ld =584.5nm WL:Lc = --nm Purity=60.1%
 Ratio:R=26.5% G=71.4% B=2.1% Peak WL:Lp=628.9nm FWHM=150.3nm
 Render Index:Ra=92.7 AvgR=90.3 TM30:Rf=90 Rg=102

R1 =93 R2 =95 R3 =96 R4 =93 R5 =93 R6 =95 R7 =92
 R8 =83 R9 =63 R10=89 R11=95 R12=87 R13=94 R14=97 R15=90

The luminaires [can] ~~lean not~~ provide less than 20% of total light output with continuous dimmer.

Dimmer	Peak Noise Reading (dBA)	Test Condition	Distance between the microphone and the UUT
LUTRON MACL-153M	14.8	Dimmer adjusted to lowest light output	< 1 m



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
Tel: (+86)755-2319 2554
Fax: (+86)755-2319 2815


2.4 Flicker	NEMA 77-2017 ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
--------------------	---

Dimming Technology	Forward phase-cut
Dimmer	LUTRON MACL-153M

Item	Short Term Flicker Indicator (Pst)	Stroboscopic Visibility Measure (SVM)
Maximum conduction	0.057	0.738
Intermediate conduction	0.128	1.100
Minimum conduction	0.600	0.474

2.5 Operating Frequency	ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
Noted: This test and data are not covered by A2LA accreditation	

Test date	2021-04-08	Test Ambient:	25±1° C
Sample No.	Operating Frequency (Hz)		
JCE210313-F1	120.002		

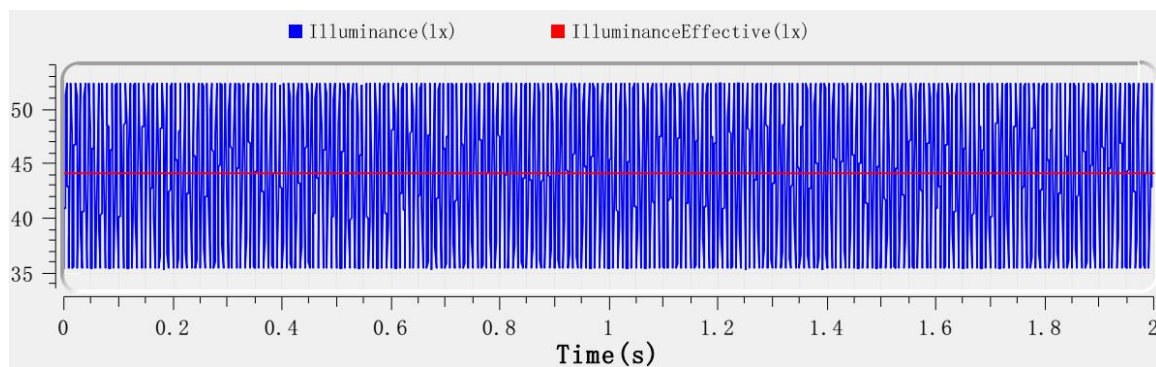


2.6 Starting Time

ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2

Test date	2021-04-08	Test Ambient:	25±1° C
Sample No.	Start Time (ms)		
JCE210313-F1	66.0		

Graph (Start Time):

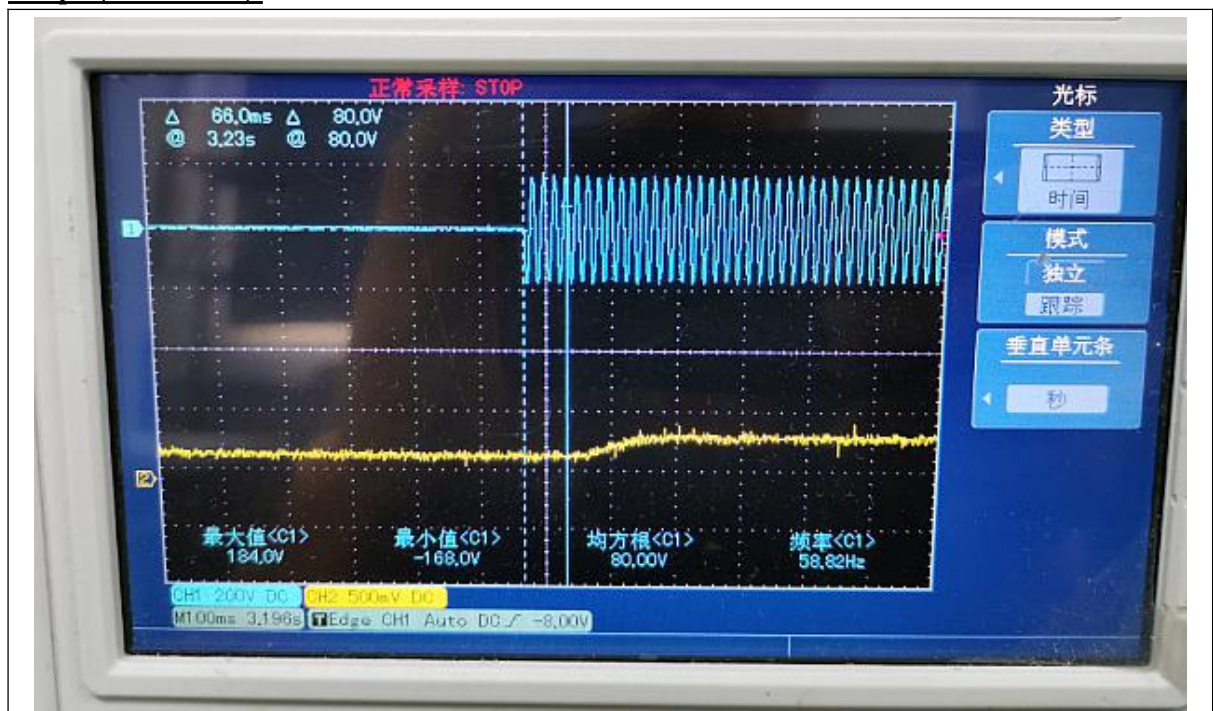



ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
 Tel: (+86)755-2319 2554
 Fax: (+86)755-2319 2815

2.7 Transient Protection Test	ANSI/IEEE C62.41 ENERGY STAR® Program Requirements for Luminaires – Version 2.2
--------------------------------------	--


Test voltage: 120V,60Hz

Test date	2021-04-08	Test Ambient	25±1° C
Sample No.		Transient Protection Test - Seven Strikes	
JCE210313-F1		Survival	

2.8 In-Situ Temperature Measurement Test (ISTMT) | UL1598-2008, 3rd Edition

Test date	2021-04-08	Test Ambient	25±5° C
Input Vol./Frequency	120.0V / 60Hz	Output Current of Single LED(mA)	43.31
Sample No.	LED Package Model	Maximum Measured LED Ts Point Temperature (°C)	Maximum permitted Ts temperature for L70 ≥ 50,000 hrs (°C)
JCE210313-F1	67-21S Series	36.2	105

In-Situ Picture - Ts:

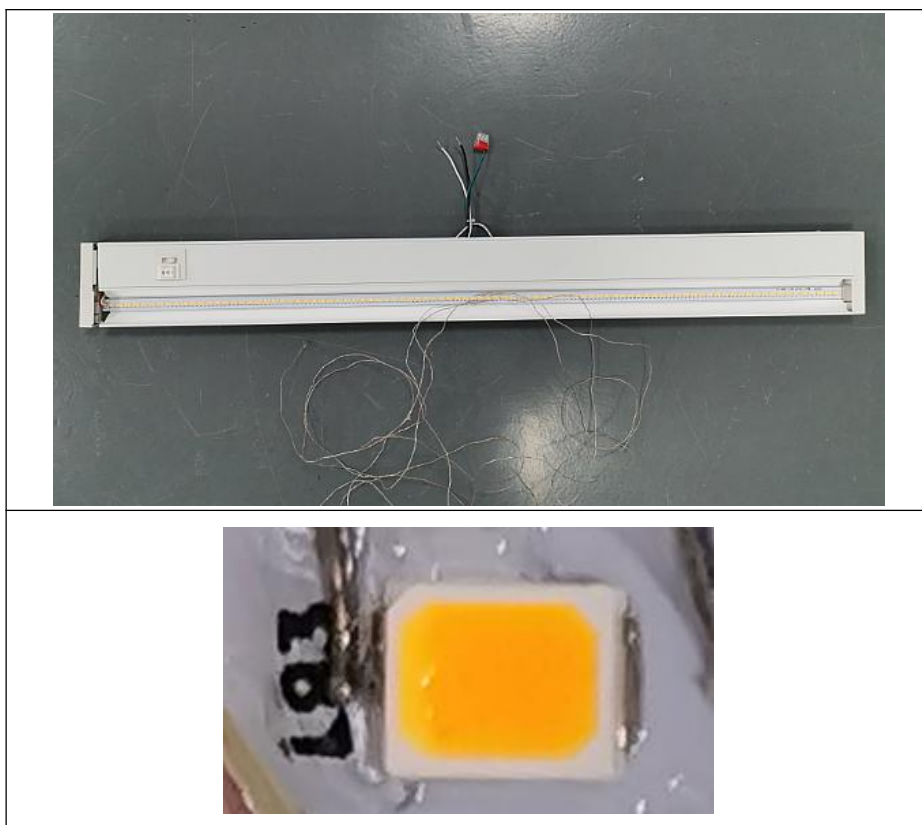

2.9 Maximum Measured Ballast or Driver Case Temperature	UL1598-2008, 3rd Edition
--	--

Test date	2021-04-08	Test Ambient	25±5° C
Sample No.	Maximum Measured Driver Case Temperature (°C)	Maximum Driver Case Temperature Limited (°C)	
JCE210313-F1	33.0	105	

In-Situ Picture - Ts:





ShenZhen Xin An Biao Technology Service Co. Ltd Testing Center

Floor 3,Building 3, No. 17,Yigongliu road,Loucun community building, Xinhua Street,Guangming New district,Shenzhen 518107
 Tel: (+86)755-2319 2554
 Fax: (+86)755-2319 2815

2.10 Standby Power Consumption:	ENERGY STAR® Program Requirements Product Specification for Luminaires (Light Fixtures) - Version 2.2
--	--

Test date	2021-04-08	Test Ambient:	25±1° C
Model Number	ULD11-5CT(Mode:2700K)	Stabilization Time (min)	60

Electrical Measurement – when the luminaires turned off:

Sample No.	Standby Power Consumption(W):
JCE210313-F1	0



3. Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-S-451	2 meter Integrating Sphere	Verified by D204 standard lamp	
ST-R-S-455	Spectral analysis system HAAS-1200	Verified by D204 standard lamp	
ST-R-S-452	Standard Lamp D204	2021-04-15	2022-04-14
ST-R-S-453	Power Meter for Integrating Sphere	2021-04-08	2022-04-06
ST-R-S-407	Goniophotometer system	Verified by S1530039 standard lamp	
ST-R-S-410	Standard Lamp S1530039	2021-04-15	2022-04-14
ST-R-S-408	Power Meter for Goniophotometer	2021-04-08	2022-04-06
ST-R-S-027	Digital Luxmeter	2021-04-08	2022-04-07
ST-R-S-016	Oscillograph	2021-04-08	2022-04-06
ST-R-S-017	Probe	2021-04-08	2022-04-07
ST-R-361	ZLB61012X	2020-08-19	2021-08-20
ST-R-414	LFA-3000	2020-12-18	2021-12-17
Uncertainty: Photometric Measurement (Sphere):2.72%, k=2 Chromaticity Measurement(Sphere):43.60K, k=2 Photometric Measurement(Goniophotometer): 3.44%, k=2			

***** END OF DATASHEET PACKAGE *****