



Report No.: GZE160771-F

NVLAP LAB CODE 201011-0

## LM-79-08 Test Report

For

### L-TECH CORPORATION

### (Brand Name: L-TECH CORP)

SHAOGANGTOU DISTRICT.QIAOTOU TOWN.DONGGUAN  
CITY.GUANGDONG PROVINCE,CHINA

### LED Luminaire

Model name(s): LJKT404S-4090

Test & Report By:

*Johnson Sun*

Engineer: Johnson Sun

Date: Jul.27,2016

Review By:

*Tommy Liang*

Manager: Tommy Liang

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

**1.1 Product Information:**

Organization Name	L-TECH CORPORTION	
Brand Name	L-TECH CORP	
Model Number	LJKT404S-4090	
SKU (if available)	N/A	
Type of Luminaire (for integral lamps, list base type and lamp type)	LED Luminaire	
Rated Voltage / Frequency	120Vac, 60 Hz	
Nominal Power	11W	
Rated Initial Lamp Lumen	--	
Declared CCT	4000K	
LED Manufacturer	N/A	
LED Model	N/A	
Sample Number	GZE160771-F1	
Luminaire Aperture (for downlights)	--	in.
Luminaire Length	--	mm
Luminaire Width	--	mm
Number of Units (modular products)	N/A	s

**Photo**


Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

## 1.2 Test Specifications:

Date of Receipt	Jul.20,2016
Date of Test	Jul.21,2016
Test item	<ol style="list-style-type: none"> <li>1. Total Luminous Flux</li> <li>2. Luminous Distribution Intensity</li> <li>3. Luminous Efficacy</li> <li>4. Correlated Color Temperature</li> <li>5. Color Rendering Index</li> <li>6. Chromaticity Coordinate</li> <li>7. Electrical Parameters</li> </ol>
Reference Standard	<ol style="list-style-type: none"> <li>1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products</li> <li>2. ANSI C78.377-2008 Specifications for the Chromaticity of Solid State Lighting Products</li> <li>3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources</li> <li>4. CIE 15-2004 Technical Report Colorimetry</li> <li>5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source</li> <li>6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems</li> </ol>
Reference Work Instruction	QD25

## 1.3 Test Methods

### 1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ , measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at  $1^{\circ}$  vertical intervals and  $22.5^{\circ}$  horizontal intervals.

### 2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

### 3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at  $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$ . The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

## 2.1 Electrical, Photometric and Chromaticity Measurements

(Refer to Work Instruction QD25)

Test date	2016-07-21	Test Ambient:	25.2 °C
Test Orientation	Horizontal	Stabilization Time (min)	90
Model Number	LJKT404S-4090		

### Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
GZE160771-F1	120.0	60	0.0889	10.02	0.9389


### Chromaticity Measurement - Sphere-Spectroradiometer Method i:

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120.0	R1	95	R9	85
Frequency (Hz)	60	R2	94	R10	85
CCT (K)	3948	R3	91	R11	94
Duv	0.0002	R4	95	R12	76
Chromaticity (x, y)	x=0.3829 y=0.3788	R5	94	R13	95
Chromaticity (u', v')	u'=0.2259 v'=0.5029	R6	91	R14	95
Color Rendering Index (CRI)	93.9	R7	96	R15	95
R9	85	R8	95	--	--

### Photometric Measurement – Goniophotometer Method:

Parameter	Result	
Test Voltage (V)	120.0	277.0
Frequency (Hz)	60	60
Total Luminous (lm)	835.03	--
Luminous Efficacy (lm/W)	83.34	--
Beam Angle (°)	107.5	--
Center Beam Candle Power (cd)	298	--

**Spectral Power Distribution & Chromaticity Diagram**

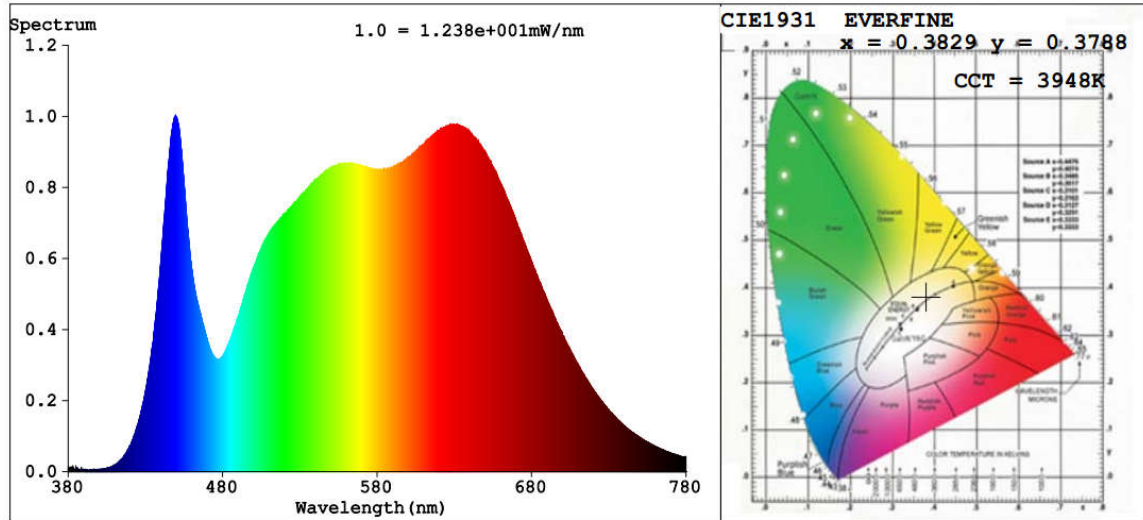


**Zonal Lumen Tabulation**

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	228.1	27.3%
0-40	370.3	44.4%
0-60	642.1	76.9%
60-90	187.3	22.4%
70-100	93.2	11.2%
90-120	4.3	0.5%
0-90	829.4	99.3%
90-180	5.6	0.7%
0-180	835.0	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	28.1	3.4%	90-100	3.1	0.4%
10-20	80.0	9.6%	100-110	0.7	0.1%
20-30	120.0	14.4%	110-120	0.5	0.1%
30-40	142.2	17.0%	120-130	0.3	0%
40-50	144.2	17.3%	130-140	0.3	0%
50-60	127.5	15.3%	140-150	0.3	0%
60-70	97.2	11.6%	150-160	0.2	0%
70-80	61.1	7.3%	160-170	0.1	0%
80-90	29.0	3.5%	170-180	0.0	0%



**Photometric Data**

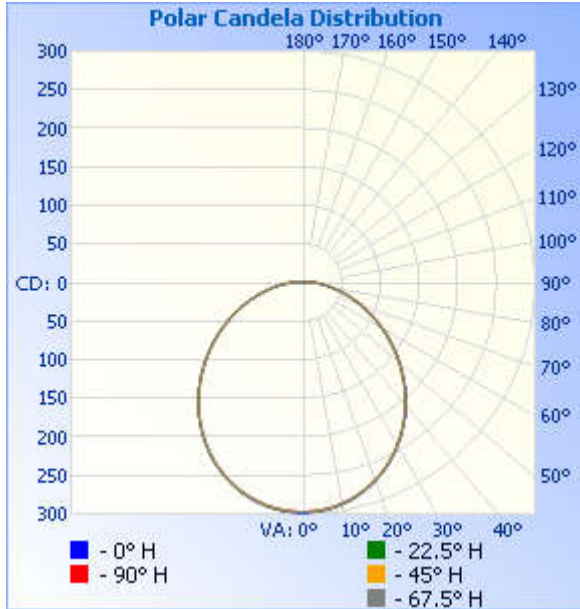

**Illuminance at a Distance**

	Center Beam fc	Beam Width	
17.0ft	1.03 fc	46.1 ft	46.2 ft
34.0ft	0.26 fc	92.3 ft	92.5 ft
51.0ft	0.11 fc	138.4 ft	138.7 ft
68.0ft	0.06 fc	184.6 ft	184.9 ft
85.0ft	0.04 fc	230.7 ft	231.1 ft
102.0ft	0.03 fc	276.8 ft	277.4 ft

■ Vert. Spread: 107.2°  
■ Horiz. Spread: 107.3°

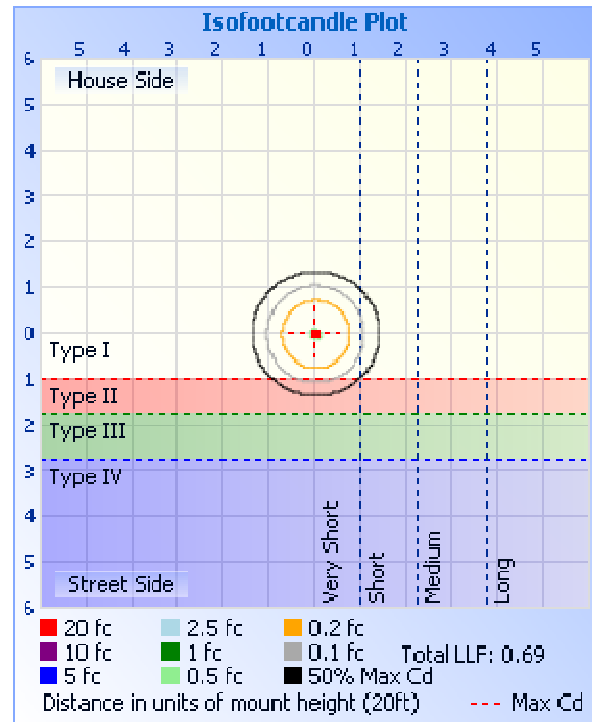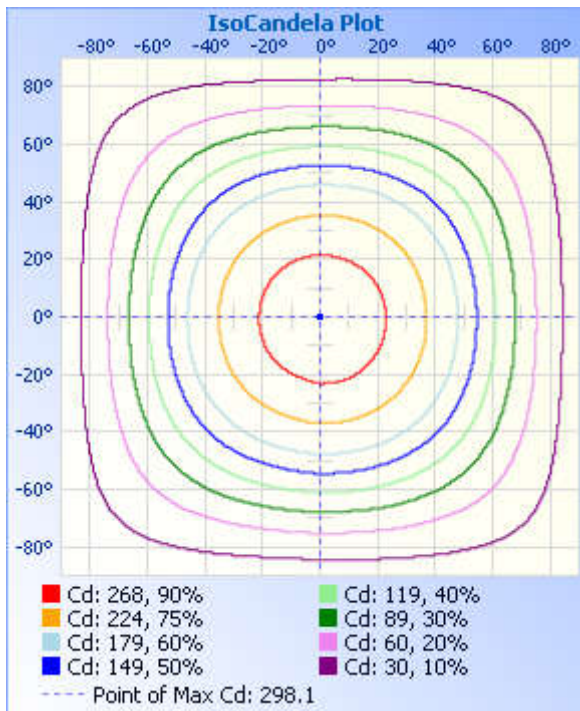

Laboratory: Standard-Tech Co. Ltd Testing Center  
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

**Candela Table - Type C**

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	298	298	297	297	297	297	296	296	298	298	297	297	297	297	296	296	298
1	298	298	297	297	297	296	296	296	298	298	297	297	297	297	296	296	298
2	298	297	297	297	297	296	296	296	298	298	297	297	297	296	296	296	298
3	297	297	297	296	296	296	296	295	298	297	297	297	296	296	296	296	297
4	297	297	296	296	296	295	295	295	297	297	297	296	296	296	296	295	297
5	296	296	295	295	295	295	295	295	297	297	296	296	296	295	295	295	296
6	296	295	295	295	294	294	294	294	296	296	296	295	295	295	294	294	296
7	295	295	294	294	294	293	293	293	296	295	295	295	294	294	294	293	295
8	294	294	293	293	293	293	293	292	295	295	294	294	294	293	293	293	294
9	293	292	292	292	292	291	291	291	294	293	293	293	293	292	292	291	293
10	292	291	291	290	290	290	290	290	293	292	292	292	292	291	291	290	292
11	290	290	289	289	289	289	289	289	292	291	291	291	290	290	289	289	290
12	289	289	288	288	288	288	287	288	290	290	289	289	289	288	288	287	289
13	287	287	287	286	286	286	286	286	289	288	288	288	288	287	287	286	287
14	286	285	285	285	285	284	284	285	287	287	286	286	286	286	285	284	286
15	284	284	283	283	283	283	283	283	286	285	285	285	285	284	283	283	284
16	282	281	281	281	281	281	281	281	284	284	283	283	282	282	282	281	282
17	280	280	279	279	279	279	279	279	282	282	281	281	281	280	280	279	280
18	278	277	277	277	277	277	277	277	280	280	279	279	279	278	277	277	278
19	276	275	275	275	274	275	275	275	278	278	277	277	277	276	276	275	276
20	273	273	272	272	272	273	272	272	276	275	275	275	275	274	274	273	273
21	271	270	270	270	270	270	270	270	273	273	272	273	273	272	271	270	271
22	268	268	267	268	267	267	267	268	271	271	270	270	270	270	269	268	268
23	266	265	265	265	265	265	265	265	268	268	268	267	267	267	266	265	266
24	263	262	262	262	262	262	262	263	266	265	265	265	265	264	263	263	263
25	260	260	259	259	259	260	259	260	263	262	262	262	262	262	261	260	260
26	257	256	256	256	256	257	256	257	260	260	259	260	260	259	258	257	257
27	254	254	253	253	254	253	253	254	257	257	257	256	256	256	255	254	254
28	251	250	250	250	250	251	250	251	254	254	253	253	254	253	252	251	251

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

29	247	247	247	247	247	247	247	247	251	251	251	251	250	249	249	248	247
30	244	243	243	244	243	244	244	244	247	247	247	247	247	247	246	245	244
31	241	240	240	240	240	241	240	240	244	244	243	244	244	243	242	242	241
32	238	236	237	237	237	237	237	238	241	241	240	240	240	240	239	238	238
33	234	233	234	233	234	233	233	234	237	238	237	237	237	236	236	234	234
34	230	229	229	230	230	230	230	230	234	234	234	234	234	232	232	231	230
35	226	225	225	226	226	226	227	227	230	230	230	230	230	229	229	227	226
36	222	222	221	222	222	223	223	222	226	227	226	226	226	225	224	224	222
37	219	218	217	217	219	218	219	219	223	222	222	222	222	222	221	220	219
38	214	214	214	214	215	215	214	215	218	219	218	219	219	218	217	215	214
39	210	210	209	210	210	211	210	211	215	215	215	215	215	213	213	212	210
40	207	205	206	206	206	206	206	206	211	210	210	210	210	210	209	207	207
41	202	202	201	202	202	202	202	203	207	207	206	207	207	205	205	204	202
42	198	197	197	197	198	198	198	198	202	202	202	202	202	202	201	199	198
43	194	193	193	193	193	194	194	194	198	199	198	199	199	197	197	195	194
44	190	189	188	189	190	190	190	190	194	194	194	194	194	193	193	191	190
45	185	185	185	185	185	185	185	186	190	190	189	189	189	189	188	187	185
46	182	180	180	180	181	182	181	181	186	186	185	186	186	184	184	183	182
47	177	175	176	176	176	177	177	177	181	181	181	181	181	181	180	178	177
48	172	171	171	172	173	172	172	173	176	176	176	177	177	176	175	173	172
49	167	167	167	167	168	168	168	168	172	172	172	172	172	171	170	169	167
50	163	163	162	163	164	163	163	164	168	168	168	167	167	167	166	165	163
51	158	158	159	158	159	159	160	159	163	164	163	164	164	162	162	161	158
52	154	154	154	154	154	155	155	155	159	159	159	159	159	158	158	156	154
53	149	149	149	149	150	151	150	151	154	154	154	155	154	153	153	151	149
54	145	144	145	145	145	146	146	146	150	150	150	150	150	148	148	147	145
55	140	140	140	140	141	141	141	142	145	145	145	145	145	145	144	142	140
56	136	135	136	136	137	137	137	137	140	141	140	141	141	140	139	137	136
57	131	130	131	132	133	132	132	133	136	136	136	136	136	136	135	133	131
58	126	126	127	127	128	128	127	128	131	131	131	131	131	131	130	128	126
59	123	121	122	123	124	123	123	124	128	127	127	127	127	126	125	124	123
60	118	117	118	118	119	119	119	119	123	122	122	122	122	122	121	120	118

Laboratory: Standard-Tech Co. Ltd Testing Center  
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>



61	114	113	114	113	114	115	115	115	118	119	118	118	118	117	116	115	114
62	109	109	109	109	110	110	110	111	114	114	114	114	113	112	113	111	109
63	104	104	105	105	106	106	106	106	109	109	109	109	109	108	108	106	104
64	100	99	100	101	102	101	101	102	105	105	105	105	105	104	103	102	100
65	96	95	97	96	97	97	97	97	100	100	100	100	100	100	99	97	96
66	92	91	92	92	93	93	93	94	96	97	96	96	96	95	94	93	92
67	87	87	88	88	89	89	88	89	92	92	92	92	92	90	90	89	87
68	84	83	84	83	84	84	85	84	87	87	87	87	87	87	86	85	84
69	79	78	79	79	81	80	80	81	83	84	83	83	83	82	81	81	79
70	75	74	75	75	76	76	76	76	79	79	79	79	79	78	78	76	75
71	71	70	71	72	73	72	72	73	75	76	75	75	75	74	73	72	71
72	67	67	68	67	68	68	68	68	71	71	71	71	71	70	70	69	67
73	63	62	63	64	64	64	64	64	67	67	67	67	66	66	66	64	63
74	59	59	59	60	61	61	60	61	63	64	63	63	63	62	62	61	59
75	56	55	56	56	57	57	57	57	59	59	59	59	59	59	58	57	56
76	52	51	52	53	53	53	53	54	55	55	55	56	55	55	54	53	52
77	48	48	49	49	50	50	49	50	52	52	52	52	52	51	50	50	48
78	45	45	46	46	47	46	46	47	48	49	48	48	48	48	47	46	45
79	42	41	43	42	43	43	43	43	45	46	46	45	45	44	44	43	42
80	39	38	39	39	40	40	40	40	42	42	42	42	41	41	41	40	39
81	36	35	36	36	37	36	37	37	38	39	39	39	38	38	37	36	36
82	32	33	33	33	34	34	33	34	36	36	36	35	35	34	34	34	32
83	30	30	30	31	31	31	31	31	33	33	33	32	32	32	32	31	30
84	27	27	28	28	28	28	28	28	30	30	30	30	30	29	29	28	27
85	25	25	25	25	25	26	26	26	27	27	27	27	27	27	26	26	25
86	22	22	23	23	23	23	23	24	24	25	25	25	24	24	24	23	22
87	20	20	21	20	21	21	21	21	22	23	22	22	22	21	21	21	20
88	18	18	18	19	19	19	19	19	20	20	20	19	19	19	19	19	18
89	16	16	17	16	17	17	17	17	18	18	18	18	17	17	17	16	16
90	14	14	15	15	15	15	15	14	16	16	15	15	15	15	15	15	14
91	9	7	8	10	12	9	5	8	10	8	8	8	10	10	9	10	9
92	1	1	1	1	3	2	0	1	2	2	1	2	3	2	1	2	1

Laboratory: Standard-Tech Co. Ltd Testing Center  
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

93	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0
94	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	0
95	0	1	1	0	0	0	1	1	1	1	1	1	0	2	1	0
96	0	1	2	1	0	1	2	1	1	1	1	2	1	1	3	0
97	3	1	1	5	2	4	2	1	3	1	1	5	2	4	2	3
98	4	1	1	4	4	4	1	1	5	1	1	4	4	4	1	4
99	4	1	0	3	4	3	1	1	4	1	1	3	3	3	1	4
100	3	1	0	2	3	2	1	1	4	1	1	2	2	2	1	3
101	3	0	0	1	2	1	0	0	3	1	1	1	2	1	0	3
102	2	0	0	1	1	1	0	0	3	1	0	1	1	1	1	2
103	2	0	0	0	1	0	0	0	2	1	1	0	1	0	0	2
104	1	0	0	0	0	0	0	0	1	1	0	0	0	0	1	1
105	1	0	0	0	0	0	0	0	1	0	0	0	0	0	1	1
106	1	0	0	0	0	0	0	0	1	0	0	0	0	1	0	1
107	1	0	0	0	0	0	0	0	1	0	1	0	0	0	0	1
108	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
109	1	1	0	0	0	0	0	0	1	1	0	0	0	0	1	1
110	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
111	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
112	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
113	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
114	1	1	0	0	0	0	0	0	1	1	0	0	0	0	0	1
115	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
116	1	1	0	0	0	0	0	0	1	1	0	0	0	0	0	1
117	1	1	0	0	0	0	0	0	1	1	0	0	0	1	0	1
118	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
119	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
120	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	1
121	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
122	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
123	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Laboratory: Standard-Tech Co. Ltd Testing Center  
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
127	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
129	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
131	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
132	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
133	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
134	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
136	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
137	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
138	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
141	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
142	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
143	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
144	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
146	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
147	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
148	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
149	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
150	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
151	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
153	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
154	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
156	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

157	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
158	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
159	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
160	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	0	0	0	0	1	0	0	0	1	0	0	0
163	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
164	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0
172	0	0	0	0	0	0	0	1	0	1	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
175	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
176	0	0	0	0	0	0	1	0	0	0	0	1	0	0	0	0
177	0	0	1	0	0	1	0	0	0	0	0	1	0	1	0	0
178	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
179	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0
180	0	0	0	0	0	1	0	1	0	0	0	0	1	0	1	0

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

### 3. Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-336	2 meter Integrating Sphere	2016-07-01	2017-06-30
ST-R-331	Spectral analysis system HAAS-2000	2016-07-01	2017-06-30
D204	Standard Lamp	2016-07-01	2017-06-30
PF2010	Power Meter for Integrating Sphere	2016-07-01	2017-06-30
EE-09	Goniophotometer system	2016-07-01	2017-06-30
D908S	Standard Lamp	2016-07-01	2017-06-30
PF210	Power Meter for Goniophotometer	2016-07-01	2017-06-30
ST-R-181A	Temperature Tester	2016-07-01	2017-06-30
Uncertainty: Photometric Measurement (Sphere):1.74% Chromaticity Measurement(Sphere):14.3K Photometric Measurement(Goniophotometer):1.62%			

**\*\*\*\*\* END OF REPORT \*\*\*\*\***