



Report No.: GZE160771-I

NVLAP LAB CODE 201011-0

LM-79-08 Test Report

For

L-TECH CORPORTION

(Brand Name: L-TECH CORP)

SHAOGANGTOU DISTRICT.QIAOTOU TOWN.DONGGUAN
CITY.GUANGDONG PROVINCE,CHINA

LED Luminaire

Model name(s): LJKT564S-3090

Test & Report By:

Johnson Sun

Engineer: Johnson Sun

Date: Jul.27,2016

Review By:

Tommy Liang

Manager: Tommy Liang

Note: This report does not imply product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China


Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

1.1 Product Information:

Organization Name	L-TECH CORPORTION	
Brand Name	L-TECH CORP	
Model Number	LJKT564S-3090	
SKU (if available)	N/A	
Type of Luminaire (for integral lamps, list base type and lamp type)	LED Luminaire	
Rated Voltage / Frequency	120Vac, 60 Hz	
Nominal Power	13W	
Rated Initial Lamp Lumen	--	
Declared CCT	3000K	
LED Manufacturer	N/A	
LED Model	N/A	
Sample Number	GZE160771-I1	
Luminaire Aperture (for downlights)	--	in.
Luminaire Length	--	mm
Luminaire Width	--	mm
Number of Units (modular products)	N/A	s

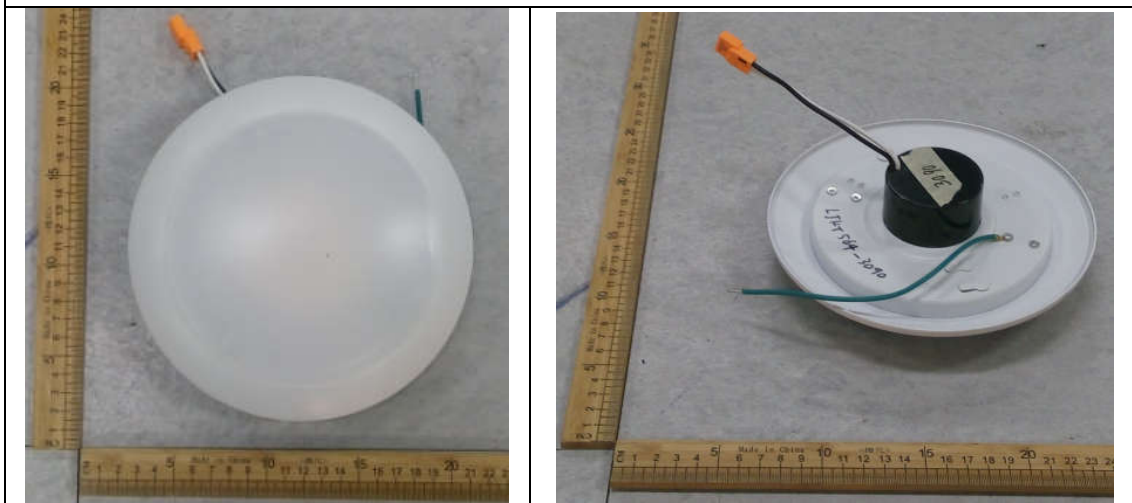Photo


Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

1.2 Test Specifications:

Date of Receipt	Jul.20,2016
Date of Test	Jul.21,2016
Test item	<ol style="list-style-type: none"> 1. Total Luminous Flux 2. Luminous Distribution Intensity 3. Luminous Efficacy 4. Correlated Color Temperature 5. Color Rendering Index 6. Chromaticity Coordinate 7. Electrical Parameters
Reference Standard	<ol style="list-style-type: none"> 1. IES LM-79-2008 Electrical and Photometric Measurements of Solid-State Lighting Products 2. ANSI C78.377-2008 Specifications for the Chromaticity of Solid State Lighting Products 3. CIE 13.3-1995 Method of Measuring and Specifying Colour Rendering Properties of Light Sources 4. CIE 15-2004 Technical Report Colorimetry 5. IESNA LM-16-93 Practical Guide to Colorimetry of Light Source 6. IESNA TM-16-05 Technical Memorandum on Light Emitting Diode (LED) Sources and Systems
Reference Work Instruction	QD25

1.3 Test Methods

1) Photometric and Light Distribution Measurement – Goniophotometer Method:

Photometric parameters were measured using the goniophotometer and software. The ambient temperature shall be maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$, measured at a point not more than 1 m from the sample and at the same height as the sample. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Luminous flux, luminaire efficacy, zonal lumen were calculated from the software taken at 1° vertical intervals and 22.5° horizontal intervals.

2) Chromaticity Measurement – Sphere-Spectroradiometer Method:

Chromaticity parameters were measured using an integrating sphere, a spectroradiometer and software. The ambient temperature condition inside the sphere was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample measurements were made using a spectroradiometer connected by a fiber optic cable and detector through the detector port of the integrating sphere. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Chromaticity coordinates, correlated color temperature and color rendering index were calculated from the spectral power distribution taken at 5 nm intervals over the range of 380 to 780 nm.

3) Electrical Measurements:

Electrical parameters were measured using power meters incorporated in goniophotometer or sphere-spectroradiometer system. The ambient temperature surrounding the sample was maintained at $25^{\circ}\text{C} \pm 1^{\circ}\text{C}$. The sample was operated at 120 or rated Volts AC, 60Hz. It was stabilized before measurement was made. Voltage, frequency, current, power, power factor and total harmonic distortion were measured by and read from the power meter.

2.1 Electrical, Photometric and Chromaticity Measurements

(Refer to Work Instruction QD25)

Test date	2016-07-21	Test Ambient:	25.2 ° C
Test Orientation	Horizontal	Stabilization Time (min)	90
Model Number	LJKT564S-3090		

Electrical Measurement:

Sample No.	Voltage (Vac)	Frequency (Hz)	Current (A)	Power (W)	Power Factor
GZE160771-I1	120.0	60	0.1074	12.38	0.9606


Chromaticity Measurement - Sphere-Spectroradiometer Method i:

Parameter	Result	Special Color Rendering Indices			
Test Voltage (V)	120.0	R1	98	R9	86
Frequency (Hz)	60	R2	98	R10	93
CCT (K)	3070	R3	95	R11	96
Duv	-0.0006	R4	97	R12	87
Chromaticity (x, y)	x=0.4312 y=0.4006	R5	98	R13	98
Chromaticity (u', v')	u'=0.2484 v'=0.5192	R6	97	R14	97
Color Rendering Index (CRI)	96.7	R7	97	R15	97
R9	86	R8	94	--	--

Photometric Measurement – Goniophotometer Method:

Parameter	Result	
Test Voltage (V)	120.0	277.0
Frequency (Hz)	60	60
Total Luminous (lm)	1048.73	--
Luminous Efficacy (lm/W)	84.71	--
Beam Angle (°)	108.6	--
Center Beam Candle Power (cd)	372	--

Spectral Power Distribution & Chromaticity Diagram

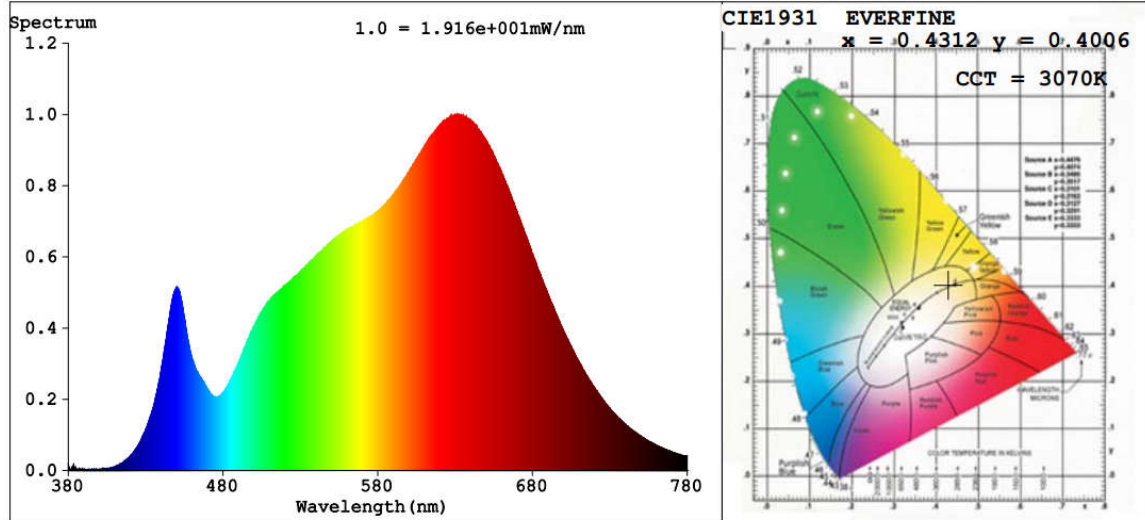


Zonal Lumen Tabulation

Zonal Lumen Summary		
Zone	Lumens	% Luminaire
0-30	285.8	27.3%
0-40	464.6	44.3%
0-60	810.0	77.2%
60-90	234.5	22.4%
70-100	110.9	10.6%
90-120	3.0	0.3%
0-90	1,044.5	99.6%
90-180	4.2	0.4%
0-180	1,048.7	100%

Lumens Per Zone					
Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	35.2	3.4%	90-100	1.8	0.2%
10-20	100.2	9.6%	100-110	0.6	0.1%
20-30	150.4	14.3%	110-120	0.5	0.1%
30-40	178.8	17.0%	120-130	0.3	0%
40-50	182.4	17.4%	130-140	0.3	0%
50-60	163.0	15.5%	140-150	0.3	0%
60-70	125.4	12.0%	150-160	0.2	0%
70-80	77.2	7.4%	160-170	0.1	0%
80-90	31.9	3.0%	170-180	0.0	0%



Photometric Data

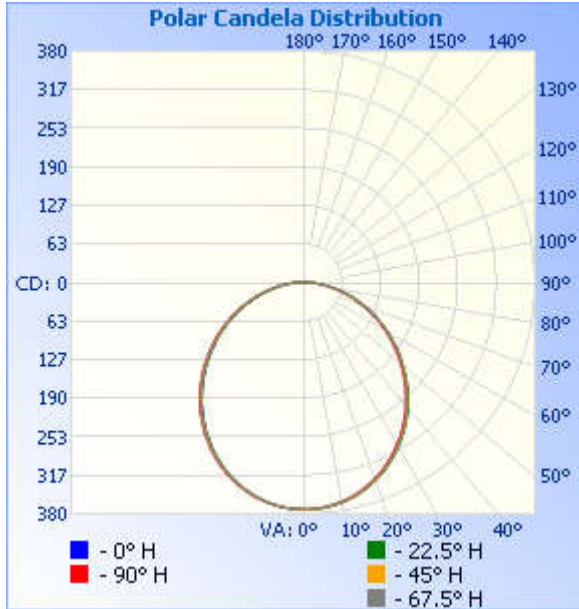

Illuminance at a Distance

	Center Beam fc	Beam Width	
17.0ft	1.29 fc	47.1 ft	47.3 ft
34.0ft	0.32 fc	94.2 ft	94.6 ft
51.0ft	0.14 fc	141.4 ft	141.9 ft
68.0ft	0.08 fc	188.5 ft	189.2 ft
85.0ft	0.05 fc	235.6 ft	236.4 ft
102.0ft	0.04 fc	282.7 ft	283.7 ft

■ Vert. Spread: 108.4°
■ Horiz. Spread: 108.6°

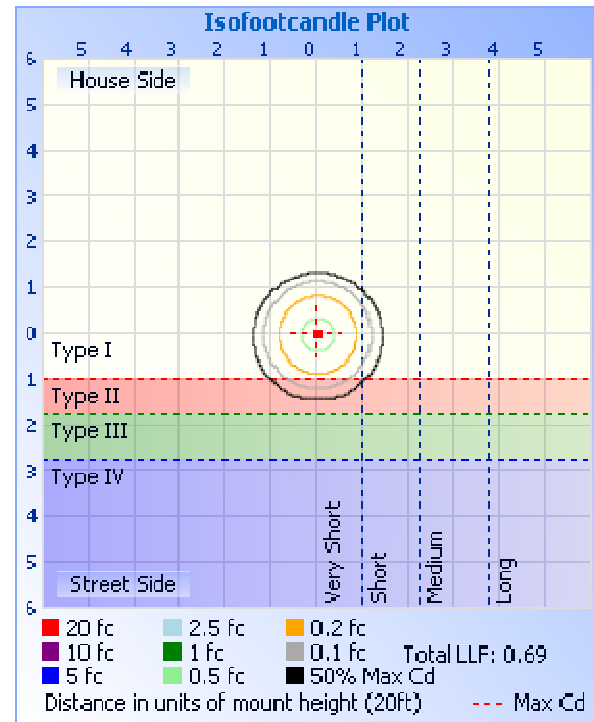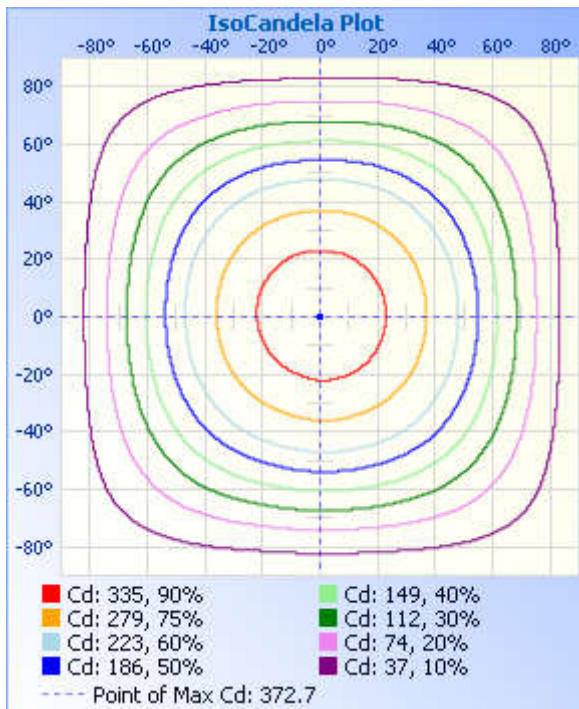

Laboratory: Standard-Tech Co. Ltd Testing Center
NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

Candela Table - Type C

	0	22.5	45	67.5	90	112.5	135	157.5	180	202.5	225	247.5	270	292.5	315	337.5	360
0	372	373	372	372	372	372	371	371	372	373	372	372	372	372	371	371	372
1	373	373	372	372	372	371	371	371	372	372	372	372	372	372	371	371	373
2	373	373	372	372	372	371	371	370	372	372	372	372	372	372	371	371	373
3	372	372	372	372	372	371	370	370	372	372	371	372	371	371	371	371	372
4	372	372	372	371	371	370	370	369	371	371	371	371	371	371	371	371	372
5	371	371	371	371	370	369	369	368	370	370	370	370	370	370	370	370	371
6	371	371	370	370	370	369	368	367	369	369	369	369	370	370	370	369	371
7	370	370	369	369	369	368	367	366	368	368	368	368	369	369	369	369	370
8	369	369	368	368	368	366	366	365	367	367	367	367	368	368	368	368	369
9	368	368	367	367	366	365	364	363	365	366	365	366	366	367	367	367	368
10	366	367	366	365	365	364	363	362	364	364	364	364	365	365	365	365	366
11	365	365	365	364	363	362	361	360	362	362	362	363	363	363	364	364	365
12	363	364	363	363	361	360	359	358	360	360	360	361	362	362	362	363	363
13	362	362	361	361	360	358	357	356	358	358	358	359	360	360	360	361	362
14	360	360	359	359	357	356	355	354	356	356	356	357	358	358	358	359	360
15	357	358	357	357	355	354	353	352	354	354	354	355	356	356	356	357	357
16	355	356	355	354	353	352	350	349	351	351	352	352	353	354	354	355	355
17	353	354	353	352	351	349	348	347	349	349	349	350	351	352	352	353	353
18	351	351	350	350	348	346	345	344	346	346	347	347	349	349	349	350	351
19	348	349	348	347	345	343	342	342	344	343	344	345	346	346	347	348	348
20	345	346	345	344	342	340	339	338	341	341	342	342	343	344	344	345	345
21	342	343	342	342	339	337	336	335	338	337	338	339	340	341	342	342	342
22	339	340	340	338	336	334	333	332	334	334	335	336	337	338	338	340	339
23	336	337	336	335	333	330	330	328	331	331	332	332	334	335	336	336	336
24	333	334	333	332	329	327	326	325	328	327	328	329	331	332	332	334	333
25	330	330	329	328	326	323	323	321	324	324	325	325	327	328	329	330	330
26	326	327	326	325	322	320	319	317	321	320	321	322	323	325	325	327	326
27	323	324	322	321	319	316	315	314	316	317	318	318	320	321	322	323	323
28	319	319	319	317	315	312	311	310	313	312	314	315	316	318	318	320	319

Laboratory: Standard-Tech Co. Ltd Testing Center

NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320

Fax: 8620-32290422

<http://www.standard-tech.com>

29	315	316	314	314	311	309	308	306	309	309	310	310	312	313	315	316	315
30	311	312	311	309	307	304	303	302	304	304	306	307	308	309	310	311	311
31	306	308	306	306	303	300	298	297	300	301	302	302	304	306	307	308	306
32	303	303	302	301	299	296	295	293	296	296	297	299	300	301	302	303	303
33	298	300	298	296	294	292	290	288	292	292	293	294	296	297	298	300	298
34	294	295	293	293	290	287	286	284	287	287	289	290	291	293	294	295	294
35	289	291	289	288	285	283	281	279	283	282	284	285	286	289	289	291	289
36	285	286	286	284	281	278	277	275	278	278	280	280	282	284	285	286	285
37	280	282	280	279	276	274	271	270	273	273	275	276	277	280	280	282	280
38	276	276	275	275	272	267	266	266	269	269	270	271	273	275	276	277	276
39	271	272	270	269	267	263	262	260	263	264	265	267	268	269	271	272	271
40	267	267	266	264	261	257	256	255	259	258	260	261	264	265	265	268	267
41	261	262	260	259	256	253	251	251	253	254	255	256	258	260	261	263	261
42	256	256	255	254	251	248	245	244	248	248	250	251	253	255	256	258	256
43	250	252	251	248	246	243	241	239	243	244	246	246	248	250	251	253	250
44	246	246	245	244	241	237	235	234	238	238	240	241	243	244	246	247	246
45	240	242	240	238	236	232	231	229	233	232	234	236	238	240	240	243	240
46	236	236	235	234	230	227	225	223	227	228	230	230	233	234	236	237	236
47	230	231	230	228	225	221	220	219	222	222	224	225	227	228	230	232	230
48	224	226	224	223	219	216	214	213	217	217	219	220	222	224	225	227	224
49	219	220	219	217	215	211	210	208	211	211	213	215	217	218	220	221	219
50	213	214	213	211	209	206	204	202	206	205	208	209	212	213	214	216	213
51	208	209	207	207	204	200	198	197	200	201	203	203	206	207	209	211	208
52	202	203	203	201	198	195	193	192	194	195	197	198	200	202	203	206	202
53	198	198	197	196	193	189	187	187	190	190	191	192	195	197	198	200	198
54	192	192	192	190	187	183	182	181	184	184	186	187	189	191	192	194	192
55	186	187	186	185	181	178	176	175	178	178	180	181	183	186	186	189	186
56	181	181	181	179	176	172	171	170	173	173	175	175	178	180	182	183	181
57	175	175	175	174	170	167	165	164	167	167	169	171	172	174	176	178	175
58	170	170	169	168	165	161	160	159	162	162	163	165	168	169	171	172	170
59	164	164	164	162	159	156	154	153	156	156	158	160	162	163	165	166	164
60	159	159	158	157	154	150	149	148	150	150	152	154	155	158	159	161	159

Laboratory: Standard-Tech Co. Ltd Testing Center
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

61	153	153	153	151	148	144	143	142	145	145	147	148	151	152	154	155	153
62	147	148	147	146	143	139	137	136	139	139	141	143	145	146	148	149	147
63	142	142	140	140	137	133	132	131	134	133	135	137	140	141	142	144	142
64	135	136	136	135	131	128	127	125	128	128	130	132	134	135	137	138	135
65	131	131	129	129	126	122	122	120	122	122	124	126	128	131	131	133	131
66	125	125	124	123	120	116	116	114	117	117	119	120	123	125	126	127	125
67	118	120	118	118	115	112	111	108	111	111	113	115	117	118	120	121	118
68	114	114	114	112	109	106	105	104	106	105	107	109	112	114	114	117	114
69	108	109	108	107	103	101	99	98	100	101	103	103	106	108	109	111	108
70	103	103	101	101	99	95	94	93	95	95	97	98	100	103	104	106	103
71	97	97	97	96	93	90	89	87	90	90	92	92	95	97	99	100	97
72	92	93	91	90	88	85	84	83	84	84	86	88	90	91	93	94	92
73	86	87	86	84	82	79	78	77	78	79	81	82	84	87	87	90	86
74	81	82	80	80	78	74	73	72	74	74	76	76	79	81	83	84	81
75	76	76	75	74	72	69	68	67	68	69	70	72	74	75	77	79	76
76	71	72	70	70	67	65	63	62	64	64	66	66	69	71	73	74	71
77	66	66	65	64	62	59	59	58	59	59	61	62	64	66	67	68	66
78	61	61	60	59	57	54	54	53	54	54	56	57	60	62	62	64	61
79	55	57	55	55	53	50	49	49	50	50	51	52	55	56	58	59	55
80	51	52	51	50	48	45	45	44	45	45	47	48	50	51	53	55	51
81	47	48	46	46	44	42	40	39	41	41	42	43	46	47	48	50	47
82	43	43	41	41	39	37	37	36	37	37	38	40	41	43	44	45	43
83	38	38	38	36	35	34	33	32	33	33	34	35	38	39	39	41	38
84	34	35	34	33	32	30	29	29	29	30	30	31	33	35	36	36	34
85	31	31	30	29	28	26	26	25	26	26	27	28	29	31	32	33	31
86	27	28	26	26	25	23	22	22	23	22	24	24	26	28	28	29	27
87	24	24	23	22	21	20	20	19	20	20	20	22	23	24	25	25	24
88	20	21	20	19	18	17	17	16	17	17	18	19	20	21	21	23	20
89	17	17	15	16	15	14	14	14	15	15	15	16	17	18	19	19	17
90	9	8	7	8	8	7	8	9	11	11	13	14	14	15	15	15	9
91	1	2	0	1	2	1	1	2	6	5	6	8	10	9	6	7	1
92	1	1	0	0	0	0	0	0	1	1	1	2	2	1	1	1	1

Laboratory: Standard-Tech Co. Ltd Testing Center
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road,Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

93	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
94	0	0	1	0	0	0	0	0	1	1	1	1	1	1	1	0
95	0	1	1	0	0	0	1	0	1	1	1	1	1	1	1	0
96	2	1	0	1	1	1	0	1	1	1	1	1	1	1	1	2
97	4	1	0	1	1	1	0	1	3	1	1	2	0	1	1	4
98	4	1	0	0	0	0	0	1	3	1	0	1	1	1	0	4
99	3	1	0	0	0	0	0	1	3	1	0	1	1	1	1	3
100	3	1	0	0	0	0	0	1	3	1	0	0	1	0	0	3
101	2	1	0	0	0	0	0	1	2	1	0	0	0	0	0	2
102	2	1	0	0	0	0	0	1	2	1	0	0	0	0	0	2
103	1	0	0	0	0	0	0	0	2	1	0	0	0	0	0	1
104	1	0	0	0	0	0	0	0	1	1	0	0	0	0	0	1
105	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
106	2	1	0	0	0	0	0	1	2	1	0	0	0	0	0	2
107	2	1	0	0	0	0	0	1	2	1	0	0	0	0	0	2
108	1	1	0	0	0	0	0	1	2	1	0	0	0	0	0	1
109	1	1	0	0	0	0	0	1	2	1	0	0	0	0	0	1
110	1	1	0	0	0	0	0	1	2	1	0	0	0	0	0	1
111	1	1	0	0	0	0	0	1	2	1	0	0	0	0	0	1
112	1	1	0	0	0	0	0	1	1	1	0	0	0	0	1	1
113	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
114	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
115	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
116	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
117	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
118	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
119	1	1	0	0	0	0	0	1	1	1	0	0	0	0	0	1
120	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0
121	0	0	0	0	0	0	0	1	1	1	0	0	0	0	0	0
122	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
123	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
124	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Laboratory: Standard-Tech Co. Ltd Testing Center
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

125	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
126	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
127	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
128	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
129	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
130	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
131	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
132	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
133	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
134	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
135	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
136	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
137	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
138	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
139	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
140	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
141	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
142	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
143	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
144	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
145	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
146	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
147	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
148	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
149	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
150	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
151	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
152	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
153	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
154	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
155	0	0	0	0	0	0	0	1	0	0	0	1	0	0	1	0
156	0	0	0	0	0	0	0	0	1	1	0	0	0	0	0	0

Laboratory: Standard-Tech Co. Ltd Testing Center
 NVLAP CODE: 201011-0

Report Format Number STD/QR4909-A/2

Address: Standard-Tech Building, No.6 Guanhong Road, Guangzhou Science City, Guangzhou 510663, China

Tel: 8620-3229 0320 Fax: 8620-32290422 <http://www.standard-tech.com>

157	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
158	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
159	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
160	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
161	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
162	0	0	0	0	1	0	0	0	1	0	0	0	0	0	0	0
163	0	1	0	0	0	0	0	0	0	1	0	0	0	0	0	0
164	0	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
165	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
166	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
167	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
168	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
169	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
170	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
171	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
172	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
173	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
174	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
175	0	0	0	0	0	0	1	0	0	0	1	0	0	0	0	0
176	0	0	0	0	0	0	0	0	1	0	0	0	1	0	1	0
177	0	1	0	0	0	1	0	0	0	0	0	0	0	0	0	0
178	0	1	0	0	1	1	0	1	1	0	0	1	0	0	0	0
179	1	0	0	0	0	0	1	0	0	0	1	0	0	0	0	1
180	1	1	0	0	0	0	0	0	1	1	0	0	0	0	0	1

3. Test Equipment

Equipment ID	Equipment Name	Last Calibration Date	Next Calibration Date
ST-R-336	2 meter Integrating Sphere	2016-07-01	2017-06-30
ST-R-331	Spectral analysis system HAAS-2000	2016-07-01	2017-06-30
D204	Standard Lamp	2016-07-01	2017-06-30
PF2010	Power Meter for Integrating Sphere	2016-07-01	2017-06-30
EE-09	Goniophotometer system	2016-07-01	2017-06-30
D908S	Standard Lamp	2016-07-01	2017-06-30
PF210	Power Meter for Goniophotometer	2016-07-01	2017-06-30
ST-R-181A	Temperature Tester	2016-07-01	2017-06-30
Uncertainty: Photometric Measurement (Sphere):1.74% Chromaticity Measurement(Sphere):14.3K Photometric Measurement(Goniophotometer):1.62%			

******* END OF REPORT *******