


## 5 & 6 inch LED Retrofit

### 5 & 6" Round Deep Smooth LED Downlight Retrofit Kit



### Dimensions

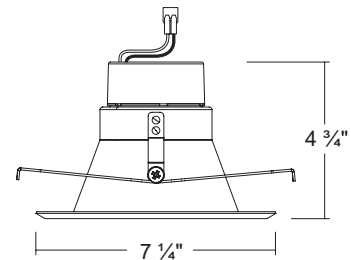

### Finishes



## SPECIFICATION

### QUICK FEATURES

- Spun aluminum trim routes heat away from electrical components
- 4 different colors : **W**-White / **B**-Black / **SN**-Satin Nickel / **BZ**-Bronze
- Dimmable to 10% with most standard triac dimmers
- E26 medium screw-base Edison adaptor provides easy installation into Incandescent housings (GU10 and GU24 socket adaptor available - sold separately)
- cUL classified / ENERGY STAR qualified
- Wet Location
- Lifetime of 50,000 hours
- 5 year warranty

### PERFORMANCE DATA

Input Voltage	120V
Frequency	50 / 60Hz
T Ambient	-30°C ~40°C (-22°F ~104°F)

(all values at 25°C without a dimming control in circuit)

### LIGHT SOURCE TEST TABLE

Wattage	2700K	3000K	4000K	5000K
13 W	920 lm	930 lm	950 lm	970 lm

CRI 90

## ORDERING INFORMATION

Model NO.	Description
LRKT569W-EN	5&6" LED Retrofit / Round Deep Smooth / White
LRKT569W-B	5&6" LED Retrofit / Round Deep Smooth / Black
LRKT569W-SN	5&6" LED Retrofit / Round Deep Smooth / Satin Nickel
LRKT569W-BZ	5&6" LED Retrofit / Round Deep Smooth / Bronze

## DIMMER LIST

### List of Triac Dimmer Switch (120V)

Mfr	Model #	Dimming Rate
<b>COOPER</b>	DLC03P	10 - 100%
<b>Leviton</b>	1A1505 / 1C1605	10 - 100%
<b>Leviton</b>	6631 / 6633	10 - 100%
<b>Lutron</b>	CT-603PG / CT-600PR	10 - 100%
<b>Lutron</b>	DV-600PR / DV603PG	10 - 100%
<b>Lutron</b>	DVW-603PGH / DVCL-153P	10 - 100%
<b>Lutron</b>	MACL-153M / TGCL-153P	10 - 100%
<b>Lutron</b>	S-600PR / S-2-LH	10 - 100%