

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_

This product is UL fire rated and can be protected for 2 hours with a double wall fixture incorporates a non-combustible fiber insulation to prevent flames, toxic gases, and ignition gases from passing through. Suitable for Condominiums, Apartment Buildings, Multi-Family, Commercial and Residential applications. Luminaire provides up to 2 hours of protection in L500, L505, L511, L536, L538, L541, L556, L577, M500, M510, M521 and M543 Floor-Ceiling Designs.

## DESCRIPTION

- 2 Hours Fire Rated UL Listed (UL 1598 / UL 263)
- Air Tight (ASTM Standard E283-04)
- Pre-installed 3port push in quick connector
- 13-5/8" to 25" Swivel Hanger Bar with pre-installed nails
- Housing adjusts from 1-1/2" to accommodate various ceiling thickness
- GU 10 Socket for use GU 10 MAX. 25W LED Lamp
- Spacing of luminaires not to exceed one per 25 sq ft of ceiling area with min separation of 3 ft between luminaires.

## FEATURES

### PLASTER FRAME

- Galvanized steel plaster frame with integral bar hanger receivers.
- The housing can be removed from plaster frame to provide access to the J-box.

### HOUSING

- Die formed galvanized steel housing with noncombustible fiber insulation.
- Housing provides up to 2 hours of protection in L500, L505, L511, L536, L538, L541, L556, L577, M500, M510, M521 and M543 Floor-Ceiling construction.

### JUNCTION BOX

- Compact galvanized steel junction box with 24in3 internal volume.
- One 1-1/8", one 1/2", three 7/8" knockouts and four Romex pryouts with strain relief.
- Accepts 14-2, 14-3, 12-2, 12-3 U.S. and 14-2, 14-3, 12-2 Canadian NM cable.
- Three 3-port push wire nuts with clear caps for quick and reliable mains voltage connections.

### BAR HANGER

- Swivel-headed bar hangers with pre-installed nail support housing at any point along span.
- Captive nail penetrates standard and engineered lumber.
- Adjusts from 13-5/8" to 25" wide.
- Can be repositioned along short side or long side of plaster frame.

### THERMAL PROTECTOR

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

### STC & IIC


- Sound transmission class (STC) and Impact Insulation class (IIC) tested by a certified acoustical speaking lab. STC and IIC comply recommendations for reducing noise including spoken word and others in multifamily and mixed-use structures.

## LISTINGS


- cULus Listed for Damp Location
- cULus Listed for Wet Location (with specified trims)
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

## FH350LGICA

3-1/2" Incandescent Line Voltage IC AT New Construction Housing  
2 Hours Fire Rated - GU10 LED Lamp

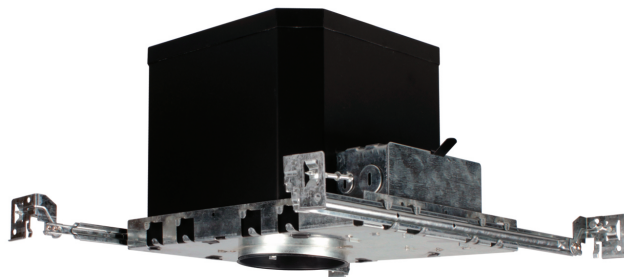


## DIMENSIONS

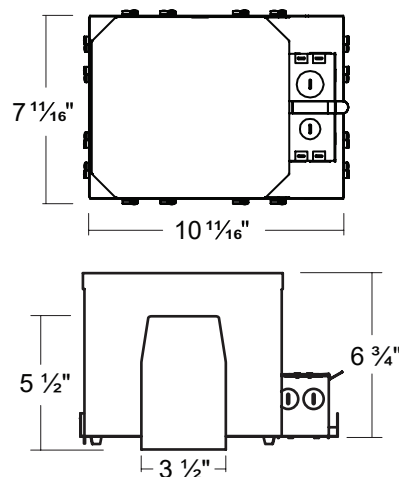


## INSTALLATION BY SWIVEL BAR HANGER

### Step 1.



### Step 2.



### TRIMS


#### • Damp Location

#### TL350



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W

#### TL353



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W

#### TL355



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W

#### TL358



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W

#### TL3530



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W

#### TL3543



- **Incandescent**  
GU10, 25W
- **LED**  
GU10, 25W