


LED590ICRA / LED590ICRA-01V

5" Slope IC Air-Tight LED Dedicated Remodel Housing



Dimensions

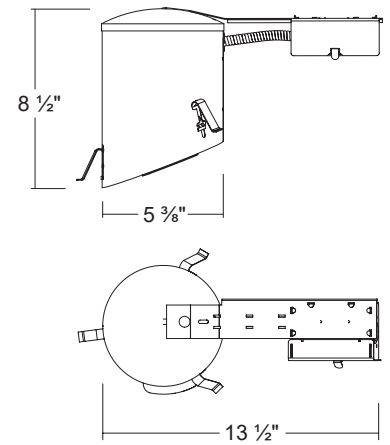

SPECIFICATION

Housing

- Designed for use in ceiling with slopes from 2/12 to 6/12

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", seven 7/8" knockouts and four Romex pryouts with strain relief

Remodel Clips

- Three remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials


Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

CONNECTOR

LED590ICA


Triac Dimming Ver.



Ideal connector

LED590ICA-01V

0-10V Dimming Ver.



Molex connector Ideal connector

ORDERING INFORMATION

Model No.	Dimming	Description
LED590ICRA	Triac Dimming	5" Slope IC Air-Tight Dedicated Remodel Housing
LED590ICRA-01V	0-10V Dimming	5" Slope IC Air-Tight Dedicated Remodel Housing

COMPATIBLE TRIMS

LED590ICRA

Model NO.

SLKT500
SLKT503
SLKT500-3CCT
SLKT503-3CCT
SLKT500-5CCT
SLKT503-5CCT

Description

5 inch LED Slope Round Smooth Retrofit kit
5 inch LED Slope Round Baffle Retrofit kit
5 inch Selectable 3 CCT LED Slope Round Smooth Retrofit kit
5 inch Selectable 3 CCT LED Slope Round Baffle Retrofit kit
5 inch Selectable 5 CCT LED Slope Round Smooth Retrofit kit
5 inch Selectable 5 CCT LED Slope Round Baffle Retrofit kit

LED590ICRA-01V

Model NO.

SLKT500-5CCT-M
SLKT503-5CCT-M

Description

5 inch Selectable 5 CCT LED Slope Round Smooth Retrofit kit
5 inch Selectable 5 CCT LED Slope Round Baffle Retrofit kit