



LED350ICA / LED350ICA-01V

3.5" IC Air-Tight LED Dedicatd New construction Housing

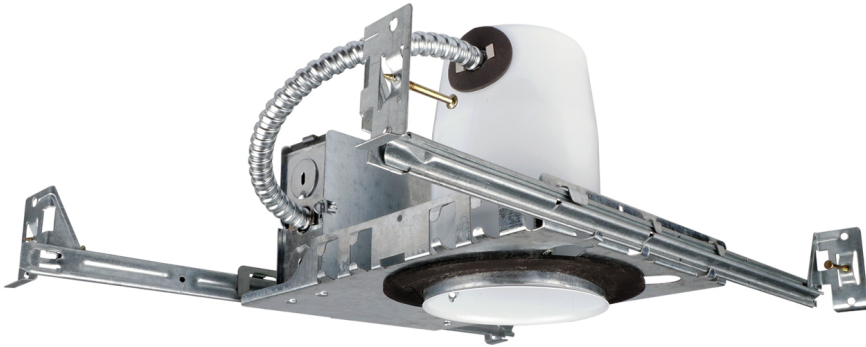

Dimensions

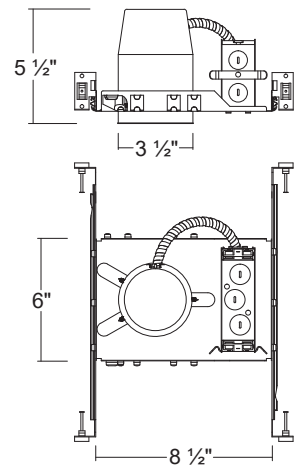

SPECIFICATION

Plaster Frame

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box

Junction Box

- Listed for through branch circuit wiring
- Contains seven 7/8" knockouts
- New Cable Trap for easy instalation of Romex Cable (US Patented / China Patented)

Bar Hanger

- Pre-installed Real nail easily installs in regular lumber, engineered lumber
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame


Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

CONNECTOR

LED350ICA


Triac Dimming Ver.



Ideal connector

LED350ICA-01V

0-10V Dimming Ver.



Molex connector Ideal connector

ORDERING INFORMATION

Model No.	Dimming	Description
LED350ICA	Triac Dimming	3.5" IC Air-Tight Dedicated New construction Housing
LED350ICA-01V	0-10V Dimming	3.5" IC Air-Tight Dedicated New construction Housing

COMPATIBLE TRIMS

LED350ICA

Model NO.

LRKT3571
LRKT35XX Series
LRKT3571-3CCT
LRKT35XX-3CCT Series
LRKT3571-5CCT
LRKT35XX-5CCT Series

Description

3.5 & 3.7 inch LED Round Gimbal Retrofit kit
3 & 3.5 & 3.7 inch LED All Retrofit kit Series
3.5 & 3.7 inch Selectable 3 CCT LED Round Gimbal Retrofit kit
3 & 3.5 & 3.7 inch Selectable 3 CCT LED All Retrofit kit Series
3.5 & 3.7 inch Selectable 5 CCT LED Round Gimbal Retrofit kit
3 & 3.5 & 3.7 inch Selectable 5 CCT LED All Retrofit kit Series

LED350ICA-01V

Model NO.

LRKT3571-5CCT-M
LRKT35XX-5CCT-M Series

Description

3.5 & 3.7 inch Selectable 5 CCT LED Round Gimbal Retrofit kit
3 & 3.5 & 3.7 inch Selectable 5 CCT LED All Retrofit kit Series