


## LED400SICRA / LED400SICRA-01V

4" IC Air-Tight LED Dedicated Shallow Remodel Housing



### Dimensions

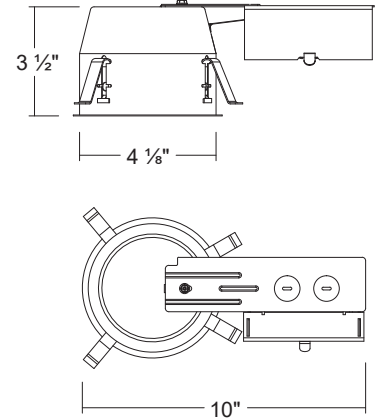

## SPECIFICATION

### Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief

### Ceiling Thickness

- Housing adjusts from 5/8" - 1-3/8" to accommodate various ceiling thickness

### Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials


### Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

## CONNECTOR

### LED400SICRA


Triac Dimming Ver.



Ideal connector

### LED400SICRA-01V

0-10V Dimming Ver.



Molex connector Ideal connector

## ORDERING INFORMATION

Model No.	Dimming	Description
LED400SICRA	Triac Dimming	4" IC Air-Tight Dedicated Shallow Remodel Housing
LED400SICRA-01V	0-10V Dimming	4" IC Air-Tight Dedicated Shallow Remodel Housing

## COMPATIBLE TRIMS

### LED400ICRA

#### Model NO.

LRKT4XX Series  
LRKT4XX-3CCT Series  
LRKT4XX-5CCT Series

#### Description

4 inch LED All Retrofit kit Series  
4 inch Selectable 3 CCT LED All Retrofit kit Series  
4 inch Selectable 5 CCT LED All Retrofit kit Series

### LED400ICRA-01V

#### Model NO.

LRKT4XX-5CCT-M Series

#### Description

4 inch Selectable 5 CCT LED All Retrofit kit Series