


LED400SICRA / LED400SICRA-01V

4" IC Air-Tight LED Dedicated Shallow Remodel Housing



Dimensions

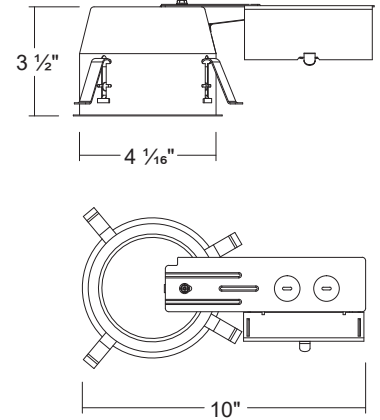

SPECIFICATION

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts
- New Cable Trap for easy installation of Romex Cable (US Patented / China Patented)

Ceiling Thickness

- Housing adjusts from 5/8" - 1-3/8" to accommodate various ceiling thickness

Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials


Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

CONNECTOR

LED400SICRA


Triac Dimming Ver.



Ideal connector

LED400SICRA-01V

0-10V Dimming Ver.



Molex connector Ideal connector

ORDERING INFORMATION

Model No.	Dimming	Description
LED400SICRA	Triac Dimming	4" IC Air-Tight Dedicated Shallow Remodel Housing
LED400SICRA-01V	0-10V Dimming	4" IC Air-Tight Dedicated Shallow Remodel Housing

COMPATIBLE TRIMS

LED400ICRA

Model NO.

LRKT4XX Series
LRKT4XX-3CCT Series
LRKT4XX-5CCT Series

Description

4 inch LED All Retrofit kit Series
4 inch Selectable 3 CCT LED All Retrofit kit Series
4 inch Selectable 5 CCT LED All Retrofit kit Series

LED400ICRA-01V

Model NO.

LRKT4XX-5CCT-M Series

Description

4 inch Selectable 5 CCT LED All Retrofit kit Series