


LED500SICRA / LED500SICRA-01V

5" IC Air-Tight LED Dedicated Shallow Remodel Housing



Dimensions

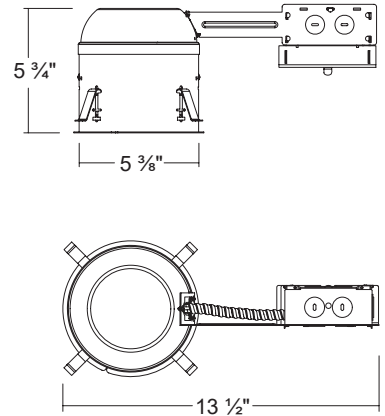

SPECIFICATION

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts
- New Cable Trap for easy installation of Romex Cable (US Patented / China Patented)

Ceiling Thickness

- Housing adjusts from 5/8" - 1-3/8" to accommodate various ceiling thickness

Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials


Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

CONNECTOR

LED500SICRA


Triac Dimming Ver.



Ideal
connector

LED500SICRA-01V

0-10V Dimming Ver.



Molex
connector Ideal
connector

ORDERING INFORMATION

Model No.	Dimming	Description
LED500SICRA	Triac Dimming	5" IC Air-Tight Dedicated Shallow Remodel Housing
LED500SICRA-01V	0-10V Dimming	5" IC Air-Tight Dedicated Shallow Remodel Housing

COMPATIBLE TRIMS

LED500SICRA

Model NO.

LRKT56X Series
LRKT54X Series
LRKT56X-3CCT Series
LRKT54X-3CCT Series
LRKT56X-5CCT Series
LRKT54X-5CCT Series

Description

5&6 inch LED All Retrofit kit Series
5 inch LED Square Retrofit kit Series
5&6 inch Selectable 3 CCT LED All Retrofit kit Series
5 inch Selectable 3 CCT LED Square Retrofit kit Series
5&6 inch Selectable 5 CCT LED All Retrofit kit Series
5 inch Selectable 5 CCT LED Square Retrofit kit Series

LED500SICRA-01V

Model NO.

LRKT56X-5CCT-M Series
LRKT54X-5CCT-M Series

Description

5&6 inch Selectable 5 CCT LED All Retrofit kit Series
5 inch Selectable 5 CCT LED Square Retrofit kit Series