


LED600ICRA / LED600ICRA-01V

6" IC Air-Tight LED Dedicated Remodel Housing



Dimensions

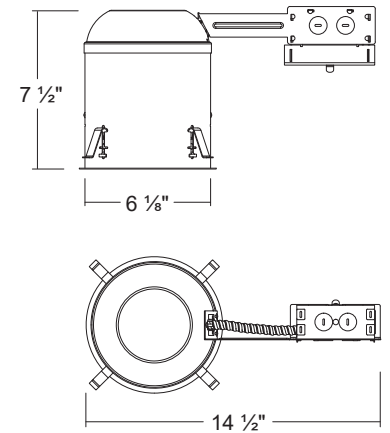

SPECIFICATION

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief

Ceiling Thickness

- Housing adjusts from 5/8" - 1 3/8" to accommodate various ceiling thickness

Remodel Clips


- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction


CONNECTOR

LED600ICRA
Triac Dimming Ver.



Ideal connector

LED600ICRA-01V
0-10V Dimming Ver.



Molex connector Ideal connector

ORDERING INFORMATION

Model No.	Dimming	Description
LED600ICRA	Triac Dimming	6" IC Air-Tight Dedicated Remodel Housing
LED600ICRA-01V	0-10V Dimming	6" IC Air-Tight Dedicated Remodel Housing

COMPATIBLE TRIMS

LED600ICRA Model NO.	Description
LRKT56X Series	5&6 inch LED All Retrofit kit Series
LRKT64X Series	6 inch LED Square Retrofit kit Series
LRKT56X-3CCT Series	5&6 inch Selectable 3 CCT LED All Retrofit kit Series
LRKT64X-3CCT Series	6 inch Selectable 3 CCT LED Square Retrofit kit Series
LRKT56X-5CCT Series	5&6 inch Selectable 5 CCT LED All Retrofit kit Series
LRKT64X-5CCT Series	6 inch Selectable 5 CCT LED Square Retrofit kit Series

LED600ICRA-01V Model NO.	Description
LRKT56X-5CCT-M Series	5&6 inch Selectable 5 CCT LED All Retrofit kit Series
LRKT64X-5CCT-M Series	6 inch Selectable 5 CCT LED Square Retrofit kit Series