

## LKTC477 Selectable 3 Watt & 5 CCT

4" Square Multi-Adjustable LED Canless Recessed Downlight



### - Finishes



B - Black



BZ - Bronze



SN - Satin Nickel



### QUICK FEATURES

- No housing required and includes pre-wired junction box with Class2 Driver
- 5 CCT Selectable - 2700K / 3000K / 3500K / 4000K / 5000K
- 3 Watt Selectable - 8W / 6W / 4W
- Adjustable gimbal offers 30-degree tilt and up to 359-degree rotation
- 4 different colors : **W**-White / **B**-Black / **SN**-Satin Nickel / **BZ**-Bronze
- Dimmable to 10% with most standard triac dimmers
- cUL Listed / Damp Location / ENERGY STAR certified
- Lifetime of 50,000 hours
- 5 year warranty

## SPECIFICATION

### PERFORMANCE DATA

|               |                                |
|---------------|--------------------------------|
| Input Voltage | 120V                           |
| Frequency     | 50 / 60Hz                      |
| T Ambient     | -30 °C ~40 °C (-22 °F ~104 °F) |


(all values at 25°C without a dimming control in circuit)

### LIGHT SOURCE TEST TABLE

| Wattage | 2700K  | 3000K  | 3500K  | 4000K  | 5000K  |
|---------|--------|--------|--------|--------|--------|
| 8 W     | 740 lm | 780 lm | 810 lm | 830 lm | 810 lm |
| 6 W     | 530 lm | 560 lm | 580 lm | 590 lm | 590 lm |
| 4 W     | 410 lm | 420 lm | 430 lm | 440 lm | 450 lm |

CRI 90

### DIMENSIONS

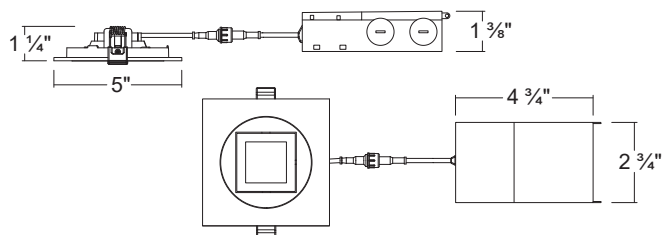

## ORDERING INFORMATION

### 3 Watt & 5 CCT Selectable

| Model No. | Description                                                                |
|-----------|----------------------------------------------------------------------------|
| LKTC477W  | 4" LED Canless Recessed Downlight / Square Multi-Adjustable / White        |
| LKTC477B  | 4" LED Canless Recessed Downlight / Square Multi-Adjustable / Black        |
| LKTC477SN | 4" LED Canless Recessed Downlight / Square Multi-Adjustable / Satin Nickel |
| LKTC477BZ | 4" LED Canless Recessed Downlight / Square Multi-Adjustable / Bronze       |

## DIMMER LIST

### List of Triac Dimmer Switch (120V)

| Mfr     | Model #       | Dimming Rate |
|---------|---------------|--------------|
| LUTRON  | SCL-153P      | 10 - 100%    |
| LEVITON | 6633-P        | 10 - 100%    |
| LEVITON | 6683          | 10 - 100%    |
| LEVITON | 6684          | 10 - 100%    |
| LEVITON | IPI06         | 10 - 100%    |
| LUTRON  | AY-600P       | 10 - 100%    |
| LUTRON  | CN-600        | 10 - 100%    |
| LUTRON  | D-603PH       | 10 - 100%    |
| LUTRON  | LGCL-153PL    | 10 - 100%    |
| LUTRON  | DV-603PG      | 10 - 100%    |
| LUTRON  | TTCL-100H     | 10 - 100%    |
| LUTRON  | TT-300        | 10 - 100%    |
| LUTRON  | DV-600P       | 10 - 100%    |
| LUTRON  | GL-600H       | 10 - 100%    |
| LUTRON  | MACL-153M     | 10 - 100%    |
| LUTRON  | AYCL-153P     | 10 - 100%    |
| LUTRON  | TG-600PHLH    | 10 - 100%    |
| LUTRON  | TGCL-153P     | 10 - 100%    |
| LUTRON  | DVCL-153PL    | 10 - 100%    |
| LEGRAND | CDLV703-PW    | 10 - 100%    |
| LEGRAND | D703-PTC      | 10 - 100%    |
| LEGRAND | DLV703-PLA    | 10 - 100%    |
| LEVITON | 6674          | 10 - 100%    |
| LEGRAND | HCL453PTCCCV6 | 10 - 100%    |
| LEVITON | 6672          | 10 - 100%    |
| LEVITON | 6613-P        | 10 - 100%    |
| LUTRON  | LGCL-153PL    | 10 - 100%    |
| LUTRON  | DVCL-153P     | 10 - 100%    |
| LUTRON  | GTJ-250M      | 10 - 100%    |
| LEVITON | 6631          | 10 - 100%    |
| COOPER  | DLC03P        | 10 - 100%    |
| COOPER  | 9530WS        | 10 - 100%    |
| LEGRAND | H703PTCCCV6   | 10 - 100%    |



**L-TECH CORPORATION**  
www.L-Techcorp.com

CHINA : SHAOGANGTOU DISTRICT, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG 523536  
TEL : 86-769-83423455 / FAX : 86-769-83423173 E-mail : ltech@vip.163.com

KOREA : A-1804, WOOLIM BLUE NINE, 240-21, YEOMCHANG-DONG, GANGSEO-GU, SEOUL, 157-779  
TEL : 82-2-2666-2917~8 / FAX : 82-2-2666-7052 E-mail : ltech77@ltechcorp.com