


H500ICRA

5" IC Air-Tight Incandescent Remodel Housing (Max. 75W)



Dimensions

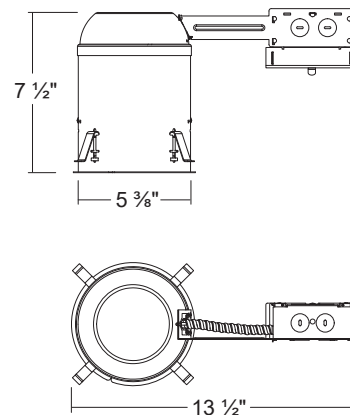

ORDERING INFORMATION

Model No.	Description
H500ICRA	5" IC Air-Tight Incandescent Remodel Housing (Max. 75W)

SPECIFICATION

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts
- New Cable Trap for easy installation of Romex Cable (US Patented / China Patented)

Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials

Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

COMPATIBLE TRIMS

T503 Splay Baffle



- **Incandescent**
75W BR / Par30

T513W AT Cone Baffle



- **Incandescent**
75W BR / Par30

T509 Albalite Shower



- **Incandescent**
40W A19
50W R / Par20

T508 Fresnel Shower



- **Incandescent**
40W A19
50W R / Par20

T507 Gimbal



- **Incandescent**
75W BR / Par30

T506 Metal Splay Baffle



- **Incandescent**
50W R / Par20
75W BR / Par30

T505 Smooth



- **Incandescent**
75W BR / Par30

T504 Cone Smooth



- **Incandescent**
60W A19

T516 Dome Shower



- **Incandescent**
40W A19
50W R / Par20

