



H550SICRA

5" IC Air-Tight Incandescent Shallow Remodel Housing (Max. 75W)

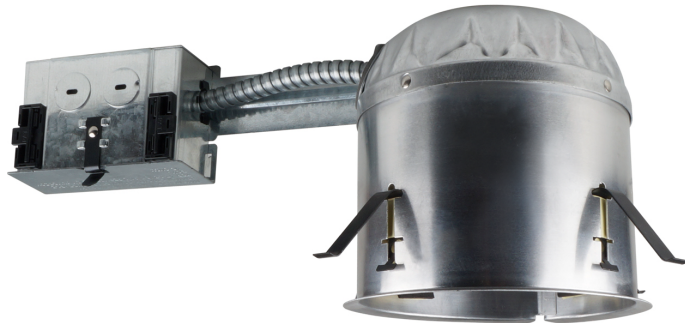

Dimensions

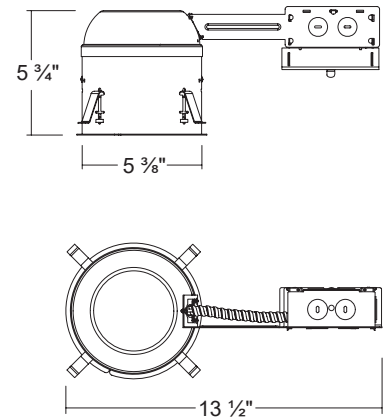

ORDERING INFORMATION

Model No.	Description
H550SICRA	5" IC Air-Tight Incandescent Shallow Remodel Housing (Max. 75W)

SPECIFICATION

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts
- New Cable Trap for easy installation of Romex Cable (US Patented / China Patented)

Remodel Clips

- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials

Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

COMPATIBLE TRIMS

T5518 Eyeball



- Incandescent
75W BR / Par30

T5513 AT Cone Baffle



- Incandescent
75W BR / Par30

T5519 Cone Smooth



- Incandescent
60W A19

T5516 Dome Shower



- Incandescent
40W A19