


H9000ICA-DW

6" Super Slope IC Air-Tight Incandescent Double-Wall New construction Housing (Max. 90W)



Dimensions

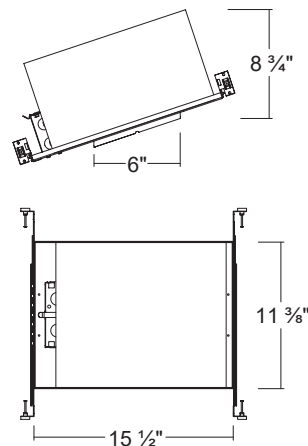

ORDERING INFORMATION

Model No.

H9000ICA-DW

Description

6" Super Slope IC Air-Tight Incandescent
Double-Wall New construction Housing (Max. 90W)

SPECIFICATION

Housing

- Designed for use in ceiling with slopes from 7/12 to 12/12

Plaster Frame

- Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box

Junction Box

- Listed for through branch circuit wiring
- Contains seven 7/8" knockouts and four Romex pryouts with strain relief

Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Bar Hanger

- Pre-installed Real nail easily installs in regular lumber, engineered lumber
- Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame

Socket

- The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through
- Certified under ASTM-E283 for Air tight construction

COMPATIBLE TRIMS

T9000 Cone Smooth



- Incandescent
75W BR / Par30

T9003 Stepped Baffle



- Incandescent
75W BR / Par30



L-TECH CORPORATION
www.L-Techcorp.com

CHINA : SHAOGANGTOU DISTRICT, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG 523536
TEL : 86-769-83423455 / FAX : 86-769-83423173 E-mail : ltech@vip.163.com

KOREA : A-1804, WOOLIM BLUE NINE, 240-21, YEOMCHANG-DONG, GANGSEO-GU, SEOUL, 157-779
TEL : 82-2-2666-2917~8 / FAX : 82-2-2666-7052 E-mail : ltech77@ltechcorp.com