


H900ICA-DW

6" Slope IC Air-Tight Incandescent Double-Wall New construction Housing (Max. 75W)



Dimensions

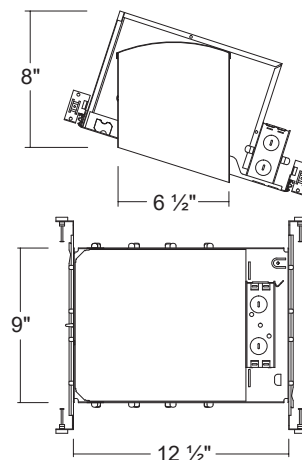

ORDERING INFORMATION

Model No.	Description
H900ICA-DW	6" Slope IC Air-Tight Incandescent Double-Wall New construction Housing (Max. 100W)

SPECIFICATION

Housing <ul style="list-style-type: none"> Designed for use in ceiling with slopes from 2/12 to 6/12 Double wall aluminum construction 	Bar Hanger <ul style="list-style-type: none"> Pre-installed Real nail easily installs in regular lumber, engineered lumber Bar Hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame
Plaster Frame <ul style="list-style-type: none"> Galvanized steel construction. The housing can be removed from plaster frame to provide access to the junction box 	Socket <ul style="list-style-type: none"> The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch
Junction Box <ul style="list-style-type: none"> Listed for through branch circuit wiring Contains seven 7/8" knockouts and four Romex pryouts with strain relief 	Listings <ul style="list-style-type: none"> cULus Listed for Damp Location cULus Listed for Feed Through Certified under ASTM-E283 for Air tight construction
Thermal Protector <ul style="list-style-type: none"> Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation. 	

COMPATIBLE TRIMS

T900 Smooth



- Incandescent
150W BR / Par30

T903 Stepped Baffle



- Incandescent
75W BR / Par30

T605 Eyeball



- Incandescent
75W BR / Par30

T684 Regressed Eyeball Baffle



- Incandescent
75W BR / Par30



L-TECH CORPORATION
www.L-Techcorp.com

CHINA : SHAOGANGTOU DISTRICT, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG 523536
TEL : 86-769-83423455 / FAX : 86-769-83423173 E-mail : ltech@vip.163.com
KOREA : A-1804, WOOLIM BLUE NINE, 240-21, YEOMCHANG-DONG, GANGSEO-GU, SEOUL, 157-779
TEL : 82-2-2666-2917~8 / FAX : 82-2-2666-7052 E-mail : ltech77@ltechcorp.com