


H900R

6" Slope Non-IC Air-Tight Incandescent Remodel Housing (Max. 150W)



Dimensions

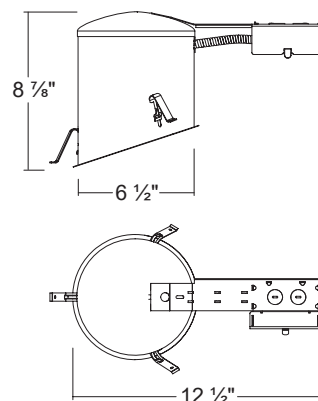

ORDERING INFORMATION

Model No.	Description
H900R	6" Slope Non-IC Air-Tight Incandescent Remodel Housing (Max. 150W)

SPECIFICATION

Housing

- Designed for use in ceiling with slopes from 2/12 to 6/12

Junction Box

- Listed for through branch circuit wiring
- Contains one 1-1/8", six 7/8" knockouts and four Romex pryouts with strain relief

Socket

- The socket aiming mechanism allows the lamp to be aimed straight down regardless of ceiling pitch

Remodel Clips

- Three Remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

Thermal Protector

- Self resetting thermal protector deactivates fixture if overheating occurs due to improper lamping or misapplied insulation.

Listings

- cULus Listed for Damp Location
- cULus Listed for Feed Through

COMPATIBLE TRIMS

T900 Smooth



- Incandescent
150W BR / Par30

T903 Stepped Baffle



- Incandescent
75W BR / Par30

T605 Eyeball



- Incandescent
75W BR / Par30

T684 Regressed Eyeball Baffle



- Incandescent
75W BR / Par30



L-TECH CORPORATION
www.L-Techcorp.com

CHINA : SHAOGANGTOU DISTRICT, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG 523536
TEL : 86-769-83423455 / FAX : 86-769-83423173 E-mail : ltech@vip.163.com
KOREA : A-1804, WOOLIM BLUE NINE, 240-21, YEOMCHANG-DONG, GANGSEO-GU, SEOUL, 157-779
TEL : 82-2-2666-2917~8 / FAX : 82-2-2666-7052 E-mail : ltech77@ltechcorp.com