

Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

LED Undercabinet 2 Wattages + 5 CCTs Selectable

Selectable 2 Wattages & 5 CCTs LED Undercabinet Lights



QUICK FEATURES

- 2 Wattages / 5 CCTs selectable
- Integral electronic driver built-in
- Easy installation with the mounting screws included in the product
- Max. Wattage - Linkable up to Max. 400W
- cUL Listed for Damp location
- Title 24 Compliant
- Energy star Qualified

PERFORMANCE DATA

| | |
|---------------|------------------------------|
| Input Voltage | 120V |
| Frequency | 50 / 60Hz |
| T Ambient | -30°C ~ 40°C (-22°F ~ 104°F) |

(all values at 25°C without a dimming control in circuit)






ORDERING INFORMATION

| Model No. | Description |
|-----------|--|
| ULD45 | 11" LED Undercabinet / 3.5W, 6W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD65 | 14" LED Undercabinet / 4.5W, 8W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD75 | 18" LED Undercabinet / 5W, 9W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD85 | 22" LED Undercabinet / 5.5W, 10W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD105 | 29" LED Undercabinet / 6.5W, 12W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD115 | 32" LED Undercabinet / 7.5W, 14W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD125 | 36" LED Undercabinet / 8W, 14W / 2700K, 3000K, 3500K, 4000K, 5000K |
| ULD165 | 48" LED Undercabinet / 9.5W, 19W / 2700K, 3000K, 3500K, 4000K, 5000K |




Finish : W-White, B-Black, BZ-Bronze

ACCESSORIES

1) Basic Accessories included


- Mounting screws (Pre-installed on each fixture) 
- Plastic anchors 
- Wire connector 
- End to end connector 
- 3/8" Diecast connector 

2) Optional Accessories

- Linkable connector with wire (Available in 4 different length of wires) 
- 1) PLCN-600 : with 2ft (600mm) lead wire
- 2) PLCN-75 : with 3" (75mm) lead wire
- 3) PLCN-50 : with 2" (50mm) lead wire
- 4) PLCN-25 : with 1" (25mm) lead wire
- Power Cord (# PLPWC-120) 
- Junction Box (#ULDJB-K) 



DIMENSIONS

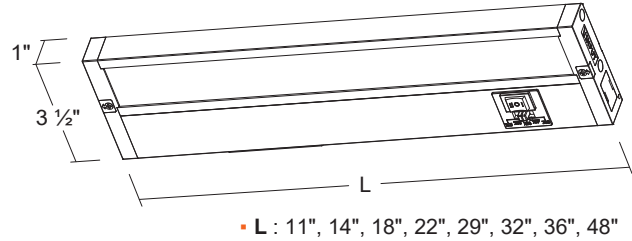

LIGHT SOURCE TEST TABLE

| Model NO. | Wattage | 2700K | 3000K | 3500K | 4000K | 5000K |
|-----------|---------|----------|----------|----------|----------|----------|
| ULD45 | 3.5 W | 220 lm | 220 lm | 230 lm | 230 lm | 240 lm |
| | 6 W | 370 lm | 380 lm | 390 lm | 400 lm | 410 lm |
| ULD65 | 4.5 W | 350 lm | 360 lm | 370 lm | 380 lm | 390 lm |
| | 8 W | 580 lm | 590 lm | 610 lm | 620 lm | 640 lm |
| ULD75 | 5 W | 390 lm | 400 lm | 400 lm | 410 lm | 420 lm |
| | 9 W | 650 lm | 660 lm | 670 lm | 680 lm | 700 lm |
| ULD85 | 5.5 W | 410 lm | 410 lm | 420 lm | 430 lm | 440 lm |
| | 10 W | 750 lm | 770 lm | 790 lm | 820 lm | 840 lm |
| ULD105 | 6.5 W | 540 lm | 540 lm | 550 lm | 550 lm | 560 lm |
| | 12 W | 920 lm | 930 lm | 940 lm | 950 lm | 950 lm |
| ULD115 | 7.5 W | 550 lm | 560 lm | 570 lm | 590 lm | 600 lm |
| | 14 W | 1,000 lm | 1,020 lm | 1,050 lm | 1,080 lm | 1,110 lm |
| ULD125 | 8 W | 660 lm | 670 lm | 690 lm | 700 lm | 720 lm |
| | 14 W | 1,130 lm | 1,150 lm | 1,180 lm | 1,200 lm | 1,230 lm |
| ULD165 | 9.5 W | 830 lm | 850 lm | 870 lm | 880 lm | 910 lm |
| | 19 W | 1,590 lm | 1,620 lm | 1,670 lm | 1,710 lm | 1,760 lm |

List of Triac Dimmer Switch

| Mfr | Model # | Dimming Rate |
|---------|------------------------|--------------|
| COOPER | DLC03P | 10 - 100% |
| Leviton | 1A1505 / 1C1605 | 10 - 100% |
| Leviton | 6631 / 6633 | 10 - 100% |
| Lutron | CT-603PG / CT-600PR | 10 - 100% |
| Lutron | DV-600PR / DV603PG | 10 - 100% |
| Lutron | DVW-603PGH / DVCL-153P | 10 - 100% |
| Lutron | MACL-153M / TGCL-153P | 10 - 100% |
| Lutron | S-600PR / S-2-LH | 10 - 100% |