

LKTC560EN Selectable 3 Watt & 5 CCT

5 & 6" Round Smooth LED Canless Recessed Downlight



- Finishes



B - Black



BZ - Bronze



SN - Satin Nickel

QUICK FEATURES

- No housing required and includes pre-wired junction box with Class2 Driver
- 5 CCT Selectable - 2700K / 3000K / 3500K / 4000K / 5000K
- 3 Watt Selectable - 12W / 8W / 6W
- 4 different colors : **W**-White / **B**-Black / **SN**-Satin Nickel / **BZ**-Bronze
- Dimmable to 10% with most standard triac dimmers
- cUL Listed / Wet Location / ENERGY STAR certified
- Lifetime of 50,000 hours
- 5 year warranty

SPECIFICATION

PERFORMANCE DATA

Input Voltage	120V
Frequency	50 / 60Hz
T Ambient	-30 °C ~ 40 °C (-22 °F ~ 104 °F)


(all values at 25°C without a dimming control in circuit)

LIGHT SOURCE TEST TABLE

Wattage	2700K	3000K	3500K	4000K	5000K
12 W	1120 lm	1180 lm	1240 lm	1270 lm	1260 lm
8 W	810 lm	840 lm	880 lm	900 lm	900 lm
6 W	590 lm	620 lm	630 lm	650 lm	660 lm

CRI 90

DIMENSIONS

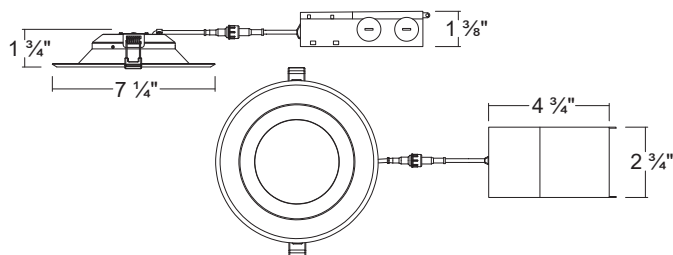

DIMMER LIST

List of Triac Dimmer Switch (120V)

Mfr	Model #	Dimming Rate
LUTRON	SCL-153P	10 - 100%
LEVITON	6633-P	10 - 100%
LEVITON	6683	10 - 100%
LEVITON	6684	10 - 100%
LEVITON	IPI06	10 - 100%
LUTRON	AY-600P	10 - 100%
LUTRON	CN-600	10 - 100%
LUTRON	D-603PH	10 - 100%
LUTRON	LGCL-153PL	10 - 100%
LUTRON	DV-603PG	10 - 100%
LUTRON	TTCL-100H	10 - 100%
LUTRON	TT-300	10 - 100%
LUTRON	DV-600P	10 - 100%
LUTRON	GL-600H	10 - 100%
LUTRON	MACL-153M	10 - 100%
LUTRON	AYCL-153P	10 - 100%
LUTRON	TG-600PHLH	10 - 100%
LUTRON	TGCL-153P	10 - 100%
LUTRON	DVCL-153PL	10 - 100%
LEGRAND	CDLV703-PW	10 - 100%
LEGRAND	D703-PTC	10 - 100%
LEGRAND	DLV703-PLA	10 - 100%
LEVITON	6674	10 - 100%
LEGRAND	HCL453PTCCCV6	10 - 100%
LEVITON	6672	10 - 100%
LEVITON	6613-P	10 - 100%
LUTRON	LGCL-153PL	10 - 100%
LUTRON	DVCL-153P	10 - 100%
LUTRON	GTJ-250M	10 - 100%
LEVITON	6631	10 - 100%
COOPER	DLC03P	10 - 100%
COOPER	9530WS	10 - 100%
LEGRAND	H703PTCCCV6	10 - 100%

ORDERING INFORMATION

3 Watt & 5 CCT Selectable

Model No.	Description
LKTC560W-EN	5 & 6" LED Canless Recessed Downlight / Round Smooth / White
LKTC560B-EN	5 & 6" LED Canless Recessed Downlight / Round Smooth / Black
LKTC560SN-EN	5 & 6" LED Canless Recessed Downlight / Round Smooth / Satin Nickel
LKTC560BZ-EN	5 & 6" LED Canless Recessed Downlight / Round Smooth / Bronze



L-TECH CORPORATION
www.L-Techcorp.com

CHINA : SHAOGANGTOU DISTRICT, QIAOTOU TOWN, DONGGUAN CITY, GUANGDONG 523536
TEL : 86-769-83423455 / FAX : 86-769-83423173 E-mail : ltech@vip.163.com

KOREA : A-1804, WOOLIM BLUE NINE, 240-21, YEOMCHANG-DONG, GANGSEO-GU, SEOUL, 157-779
TEL : 82-2-2666-2917~8 / FAX : 82-2-2666-7052 E-mail : ltech77@ltechcorp.com